

RECORD OWNER/SUBDIVIDER:

R.B. ASHLEY CUSTOMS, LLC
1011 RIDGE ROAD
POTTSTOWN, PA 19465

SITE DATA

280 BUCHERT RD
GILBERTSVILLE, PA 19525
TAX PARCEL 32-00-06983-00-5
TAX MAP ID 32045 003

Table with 3 columns: LOT AREA, GROSS, NET. Rows include EXISTING, LOT 1-5, and PR EASEMENT.

NET LOT AREA EXCLUDES THE UTILITY EASEMENT AND THE FLAG LOT ACCESS STRIP.

ZONING R-1A RESIDENTIAL DISTRICT table with columns for REQUIREMENT, REQUIRED, and PROPOSED (LOT 1-5).

SURVEY DATA

- 1. THE BOUNDARY INFORMATION SHOWN WAS TAKEN FROM A FIELD SURVEY PERFORMED BY MICHAEL C. DI PAOLO, PLS DATED AUGUST 2020. BEING LOT 2 OF THE KELLY MINOR SUBDIVISION
- 2. TOPOGRAPHY INFORMATION SHOWN WAS TAKEN FROM LIDAR AND A FIELD SURVEY PERFORMED BY MICHAEL B KELLY AUGUST 2020, AND JUNE 2021.
- 3. ELEVATIONS ARE BASED UPON STATE PLANE COORDINATES AND LIDAR.
- 4. BEARING BASE IS BASED UPON DEEDS OF RECORD.
- 5. THE LOCATIONS OF EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK, AND AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES, WHICH MIGHT BE OCCASIONED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.
- 6. PENNSYLVANIA ONE CALL SYSTEM ACT 38 SERIAL NUMBER FOR THIS PROJECT IS 20211613280.
- 7. EXISTING RIGHT-OF-WAY FOR BUCHERT ROAD WAS TAKEN FROM INFORMATION PROVIDED BY PLANS OF RECORD.
- 8. REFERENCE PLANS: "TWIN PONDS" Plan Book A53, Page 74. "MANGO" Plan Book A42, Page 69 "MANGO, Sect. II" Plan Book A45, Page 64 "MEGA" Plan Book A28, Page 79 "KELLY" Plan Book A54, Page 235 PLANS TITLED "KELLY MINOR SUBDIVISION" PREPARED BY BOYER ENGINEERING, DATED 2020-09-04.
- 9. SITE FALLS IN ZONE (X) BASED ON FEMA MAP NUMBER 42091C0067G REVISED DATE: MARCH 2, 2016.
- 10. NO STEEP SLOPES EXIST ON SITE.

GENERAL NOTES

- 1. LOTS 1-5 TO BE SERVED BY PUBLIC SEWER AND WATER.
- 2. SHEET 1 OF 12 IS TO BE RECORDED.
- 3. ON APPROVAL OF THIS PLAN BY DOUGLASS TOWNSHIP, AND RECORDING OF THE PLAN WITH THE MONTGOMERY COUNTY RECORDER OF DEEDS, THE DEVELOPER SHALL PROVIDE A CERTIFIED COPY OF THE PLAN AND A COPY OF THE PLAN IN ELECTRONIC FORMAT TO DOUGLASS TOWNSHIP.
- 4. INTENDED USE: FIVE SINGLE FAMILY DWELLINGS.
- 5. THERE ARE NO WETLANDS OR HYDRIC SOILS LOCATED ON THIS PARCEL.
- 6. PROVIDE 1" WATER SERVICE TO LOTS 2 AND 3. LOTS 1, 4, AND 5 MAY BE 2".
- 7. ALL PROPOSED UTILITIES SHALL BE INSTALLED UNDERGROUND.
- 8. NO ADDITIONAL DEVELOPMENT RESTRICTIONS REGARDING THE UTILITIES ARE REQUIRED BY THE RESPECTIVE UTILITY COMPANIES.
- 9. BUYER ACKNOWLEDGES THAT THERE WILL BE AN EASEMENT ESTABLISHED GRANTING HUGH AND JUDITH KELLY AND ALL FUTURE OWNERS, HEIRS, AND ASSIGNS TO UTILIZE THE PORTION OF THE SUBJECT PROPERTY THAT IS ON THE NORTH AND EAST SIDE OF BUCHERT ROAD, THIS AREA CAN BE UTILIZED BY GRANTEEES AS FUTURE DRIVEWAY OR ROAD ACCESS OR FOR ANY OTHER PURPOSE GRANTEE ELECTS.
- 10. EXISTING VEGETATION TO REMAIN SHALL BE PROTECTED BY ORANGE CONSTRUCTION FENCE.
- 11. REQUIRED PLANT MATERIAL SHALL BE MAINTAINED FOR THE LIFE OF THE PROJECT TO ACHIEVE THE REQUIRED VISUAL EFFECT OF THE BUFFER OR SCREEN. IT SHALL BE THE ULTIMATE RESPONSIBILITY OF THE SUCCESSIVE PROPERTY OWNERS TO INSURE THAT THE REQUIRED PLANTINGS ARE PROPERLY MAINTAINED, DEAD OR DISEASED PLANT MATERIAL SHALL BE REMOVED OR TREATED PROMPTLY BY THE PROPERTY OWNER AND REPLACED AT THE NEXT PLANTING SEASON.
- 12. ALL CLEAR SIGHT TRIANGLES ARE TO REMAIN CLEAR AND ARE THE RESPONSIBILITY OF THE PROPERTY OWNER TO MAINTAIN PLANTINGS WITHIN THE TRIANGLES.
- 13. ANY TREE OR SHRUB THAT DIES WITHIN 18 MONTHS OF PLANTING SHALL BE REPLACED BY THE DEVELOPER. ANY TREE OR SHRUB THAT WITHIN 18 MONTHS OF PLANTING OR REPLANTING IS DEEMED, IN THE OPINION OF THE MUNICIPALITY, NOT TO HAVE SURVIVED OR NOT TO HAVE GROWN IN A MANNER CHARACTERISTIC OF ITS TYPE, SHALL BE REPLACED. SUBSTITUTIONS FOR CERTAIN SPECIES OF PLANTS MAY ONLY BE MADE ONLY WHEN APPROVED BY THE MUNICIPALITY.
- 14. INSPECTIONS, OPERATION, AND MAINTENANCE OF THE PROPOSED STORMWATER FACILITIES ARE THE RESPONSIBILITY OF THE PROPERTY OWNER. NO ALTERATIONS OR DEVIATIONS OF THESE FACILITIES ARE PERMITTED WITHOUT PRIOR TOWNSHIP WRITTEN APPROVAL.
- 15. THE TOWNSHIP AND THEIR REPRESENTATIVES SHALL BE GRANTED A "BLANKET EASEMENT" TO ACCESS STORMWATER FACILITIES FOR INSPECTION PURPOSES.
- 16. EXISTING TREES TO REMAIN SHALL BE USED TO COMPLY WITH THE ADDITIONAL PLANTINGS REQUIREMENTS OF SECTION 420-6.B.
- 17. THE PROPOSED SANITARY MAIN WILL BE DEDICATED TO BERKS-MONTGOMERY MUNICIPAL AUTHORITY. THE PROPOSED SEWER LATERALS, PUMPS, AND SERVICES SHALL BE OWNED AND MAINTAINED BY THE INDIVIDUAL LOT OWNERS.
- 18. ALL SANITARY SEWER CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE RULES, REGULATIONS, AND SPECIFICATIONS OF THE BERKS-MONTGOMERY MUNICIPAL AUTHORITY AND THE PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL PROTECTION.
- 19. ALL PROPOSED GRINDER PUMP STATIONS SHALL BE OWNED AND MAINTAINED BY THE INDIVIDUAL LOT OWNERS.
- 20. WHEREVER SANITARY SEWER LINES ARE PROPOSED OUTSIDE OF STREETS/MACADAM AREA, THE MANHOLE TOPS SHALL EXTEND A MINIMUM OF 18" ABOVE FINISHED GRADE AND/OR WATERTIGHT MANHOLE FRAMES AND COVERS SHALL BE INSTALLED.

WAIVER REQUESTS:

- 1. SECTION 405.1 - TO NOT REQUIRE CARTWAY WIDENING.
- 2. SECTION 407.1.A (3) & (4) - TO NOT REQUIRE A HORIZONTAL CURVE RADII OF 150' FOR THE EXISTING ROAD.
- 3. SECTION 424.1.A - TO NOT REQUIRE A SIDEWALK ALONG THE EXISTING ROAD.
- 4. SECTION 425.1 - TO NOT REQUIRE CURBS ALONG THE EXISTING ROAD.
- 5. SECTION 416.4.E - TO NOT REQUIRE A SHARED DRIVEWAY OF LOTS 2 AND 3.
- 6. SECTION 305.4.1 - TO ONLY LOCATE TREES GREATER THAN 12".
- 7. SECTION 420-1.B.3.a - TO NOT REQUIRE A LANDSCAPE ARCHITECT'S SEAL AND SIGNATURE.
- 8. SECTION 410.M - TO ALLOW THE USE OF 12" HDPE PIPE TO OUTLET RAIN GARDENS.
- 9. SECTION 410.B - TO NOT REQUIRE A 2 FOOT EMERGENCY SPILLWAY.
- 10. SECTION 410.1.3 - TO ALLOW SIDE SLOPES OF 3:1 ON THE RAIN GARDENS.
- 11. SECTION 407.B - TO ALLOW AN ORIFICE LESS THAN 3" IN DIAMETER.

PLAN LIST

- 1. PRELIMINARY PLAN
- 2. GRADING AND UTILITY/LANDSCAPING PLAN
- 3. DETAILS SHEET
- 4. DETAILS SHEET
- 5. SEWER UTILITY PROFILE SHEET
- 6. WATER UTILITY PROFILE SHEET
- 7. EXISTING FEATURES/ENVIRONMENTAL RESOURCES PLAN
- 8. EROSION AND SEDIMENTATION CONTROL PLAN
- 9. EROSION AND SEDIMENTATION CONTROL PLAN
- 10. EROSION AND SEDIMENTATION CONTROL DETAILS
- 11. EROSION AND SEDIMENTATION CONTROL DETAILS
- 12. EROSION AND SEDIMENTATION CONTROL NARRATIVE
- 13. EROSION AND SEDIMENTATION CONTROL NARRATIVE
- 14. POST CONSTRUCTION STORMWATER MANAGEMENT PLAN
- 15. POST CONSTRUCTION STORMWATER MANAGEMENT DETAILS
- 16. POST CONSTRUCTION STORMWATER MANAGEMENT NARRATIVE

EXISTING



LINE EASEMENT TABLE with columns: Line #, Length, Direction. Rows L1, L2, L3, L4.

EXISTING

CURVE EASEMENT TABLE with columns: Curve #, Length, Radius, Delta. Rows C1, C2.

PROPOSED

EASEMENT LINE TABLE with columns: Line #, Length, Direction. Rows L5, L6, L7, L8.

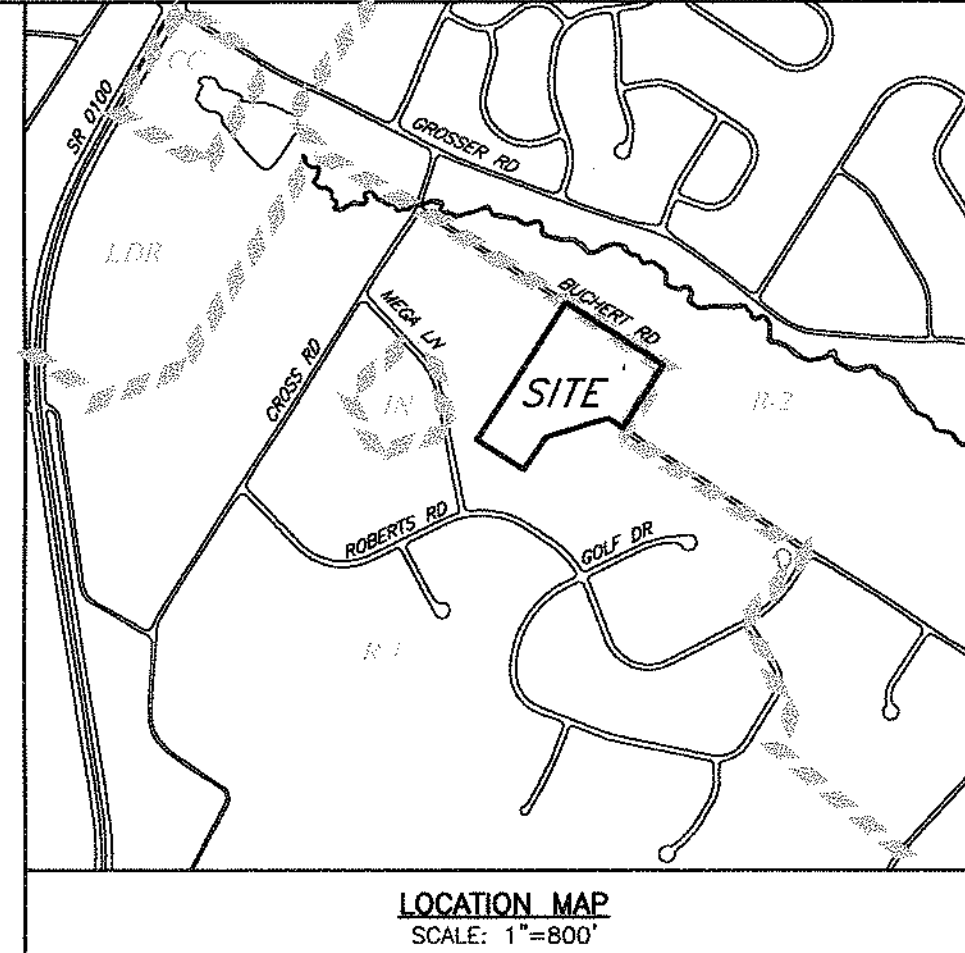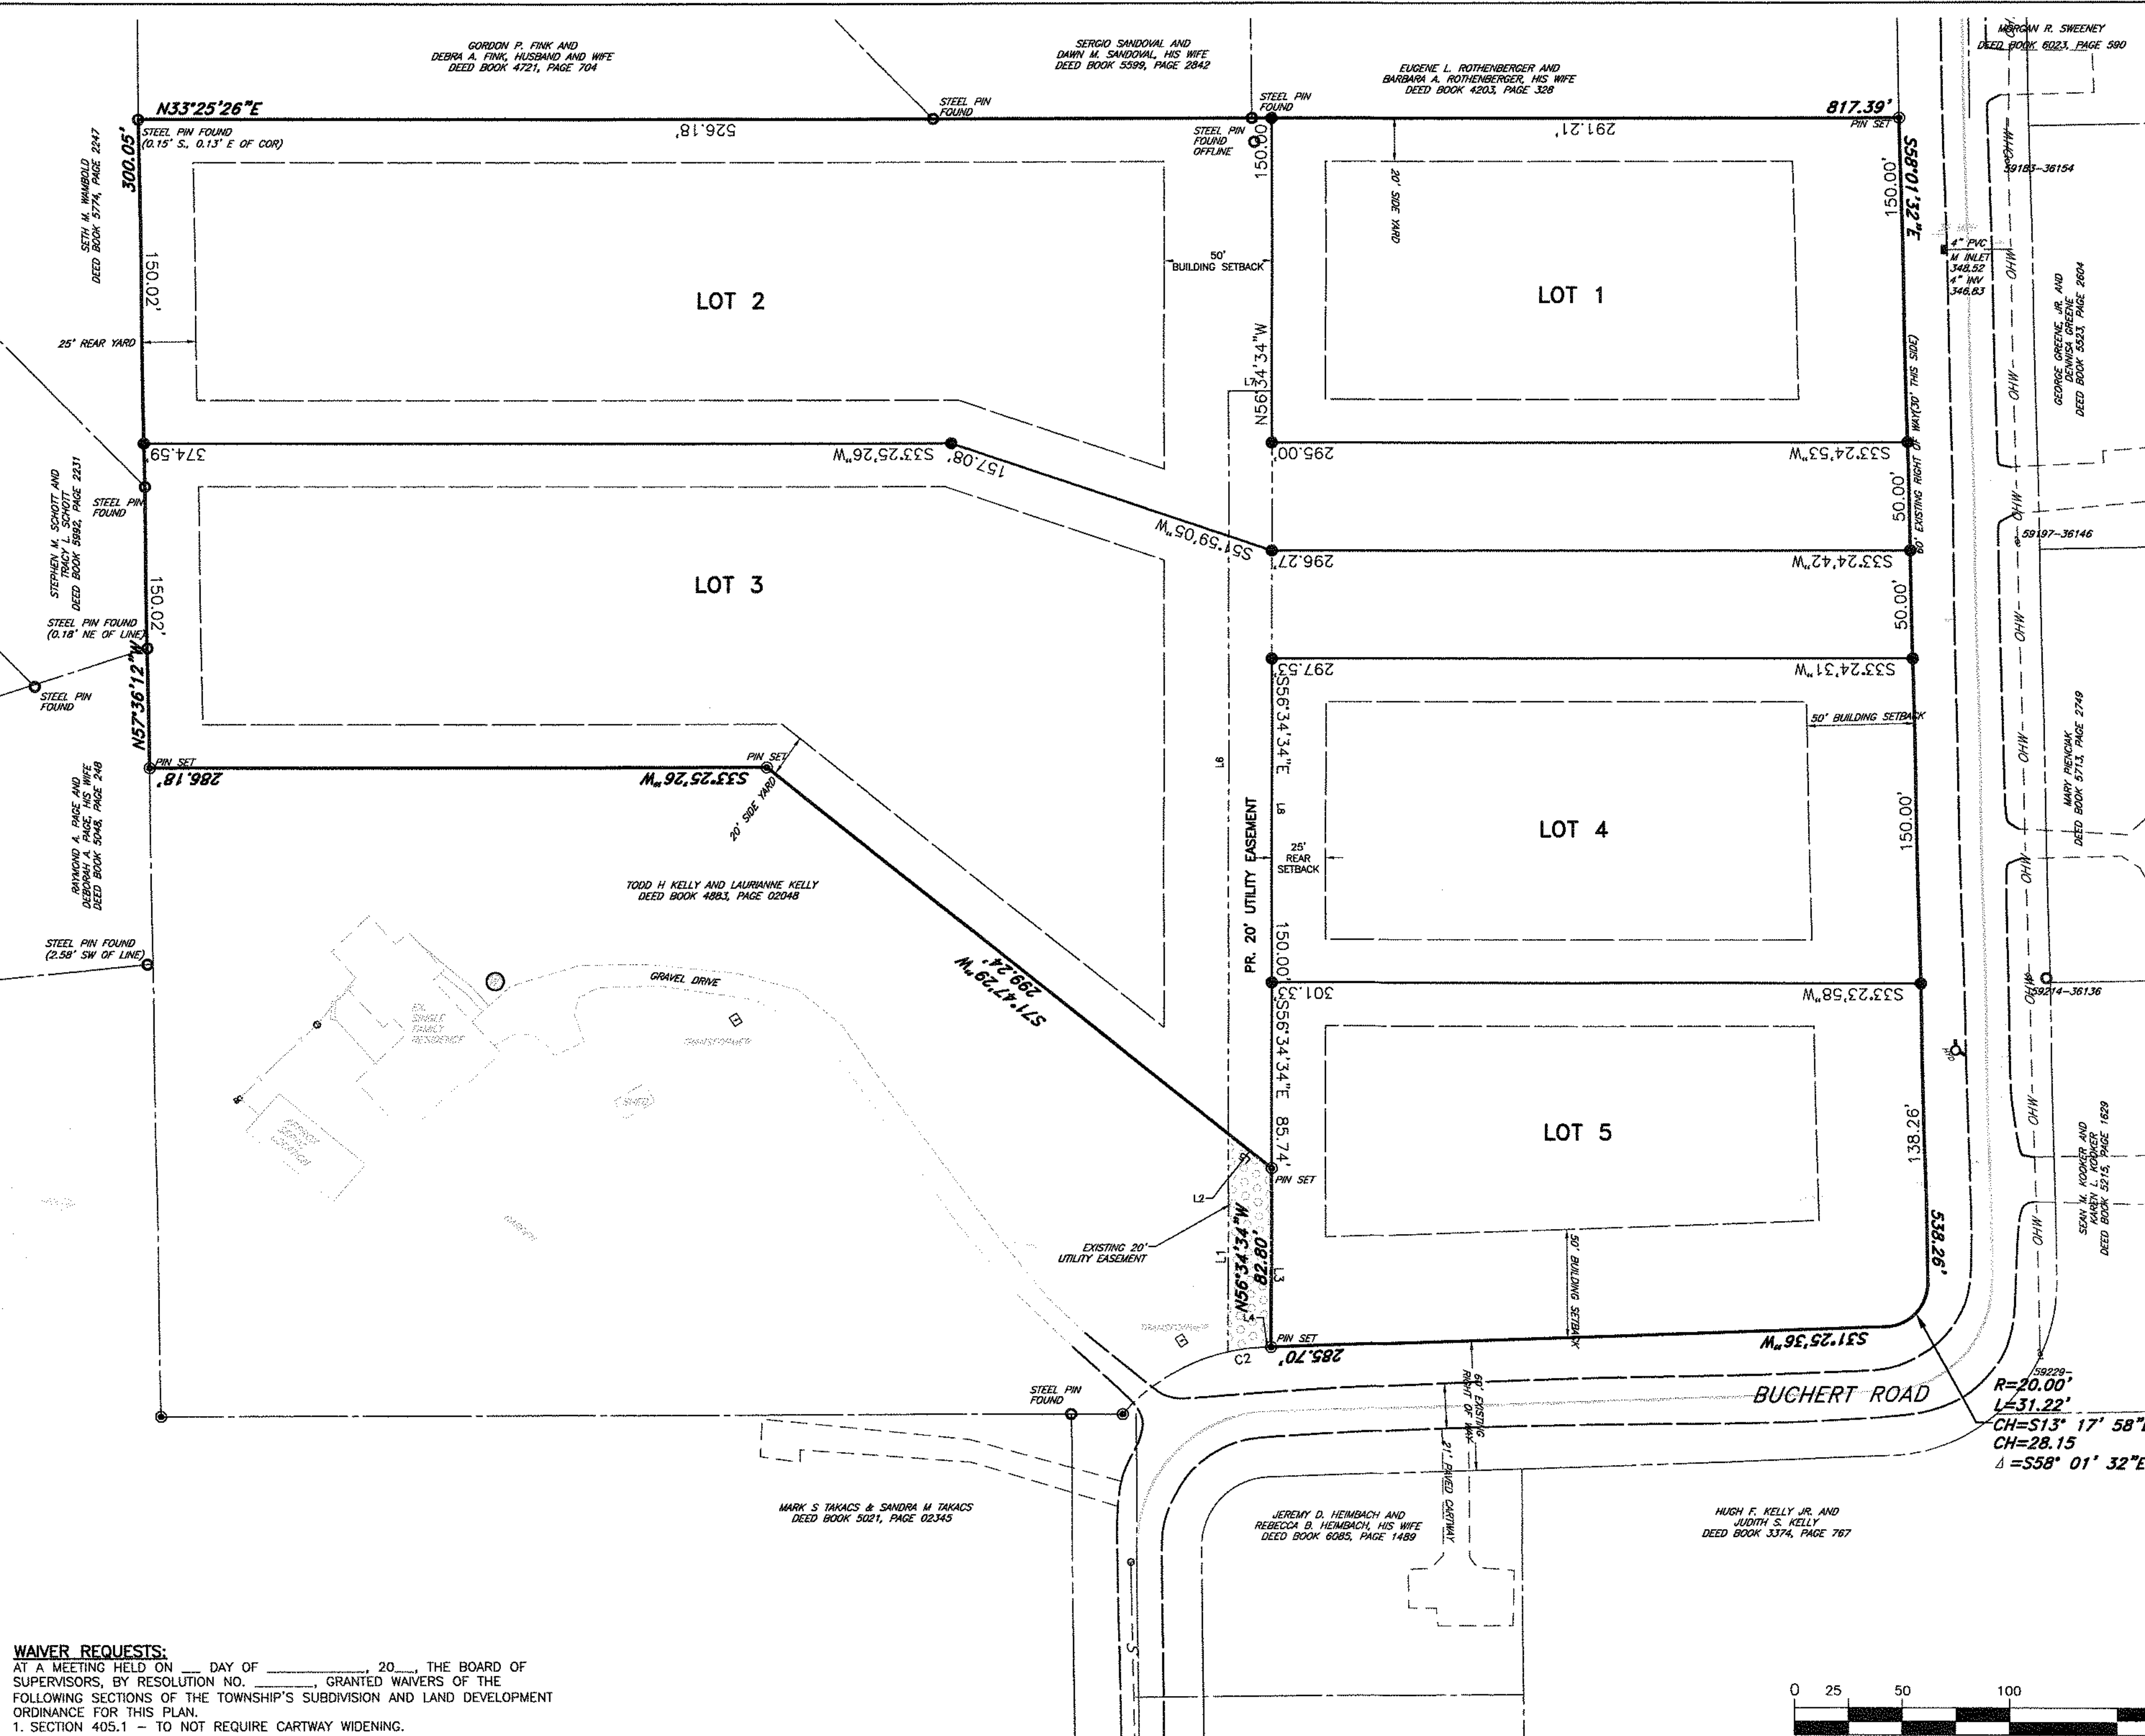


LEGEND table listing symbols for EX. TRACT LINE, EX. BOUNDARY, EX. RIGHT-OF-WAY, SETBACKS, EX. SANITARY, EX. MONUMENTATION, EX. UTILITY POLE & GUY WIRE, EX. OVERHEAD WIRES, EX. SANITARY MANHOLE, EX. TREELINE, EX. SOILS, PR. EDGE OF PAVING, PR. BUILDING, PR. WATER SERVICE, PR. SEWER LATERAL, PR. LOW PRESSURE SEWER, PR. SANITARY SEWER, PR. SEWER MANHOLE, PR. SEWER CLEANOUT, PR. SEWER SHUTOFF, PR. WATER VALVE, PR. GRINDER PUMP, PR. PROPERTY CORNER (STEEL PIN).

CERTIFICATION OF THE COUNTY RECORDER OF DEEDS AND THE COUNTY PLANNING COMMISSION. RECORDED IN THE OFFICE OF RECORDER OF DEEDS FOR MONTGOMERY COUNTY, AT NORRISTOWN, PENNSYLVANIA, THIS _____ DAY OF _____, 20____.

MCPC NO. 20-0206-001 PROCESSED AND REVIEWED. REPORT PREPARED BY MONTGOMERY COUNTY PLANNING COMMISSION IN ACCORDANCE WITH THE MUNICIPALITIES PLANNING CODE.

FOR THE DIRECTOR MONTGOMERY COUNTY PLANNING COMMISSION

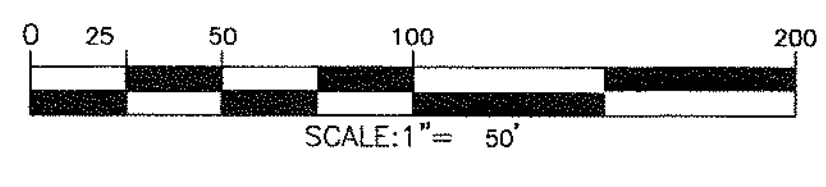

CERTIFICATION OF OWNERSHIP. COMMONWEALTH OF PENNSYLVANIA COUNTY OF MONTGOMERY. ON THIS _____ DAY OF _____, 20____, BEFORE ME, THE SUBSCRIBER, A NOTARY PUBLIC OF THE COMMONWEALTH OF PENNSYLVANIA, RESIDING IN _____, PERSONALLY APPEARED _____, AGENT FOR R.B. ASHLEY CUSTOMS, LLC, WHO ACKNOWLEDGE THEMSELVES TO BE THE OWNERS OF THE LAND SHOWN HEREON. ALL NECESSARY APPROVALS OF THIS PLAN HAVE BEEN OBTAINED AND ARE ENDORSED THEREON AND THAT WE DESIRE THIS PLAN TO BE DULY RECORDED.

SURVEYOR'S CERTIFICATION. I HEREBY CERTIFY THAT THE PLAN SHOWN AND DESCRIBED HEREON, AS WELL AS ALL OTHER DRAWINGS WHICH ARE PART OF THE PLAN SET, ARE TRUE AND CORRECT BEARING MY SEAL, ARE TRUE AND CORRECT TO THE ACCURACY REQUIRED BY THE DOUGLASS TOWNSHIP SUBDIVISION AND LAND DEVELOPMENT ORDINANCE, AND WERE PREPARED BY ME OR UNDER MY DIRECTION FOR WHICH I ACCEPT FULL RESPONSIBILITY, AND REPRESENTS A FIELD SURVEY PERFORMED BY ME OR UNDER MY DIRECTION. THE EXISTING PERIMETER MONUMENTS SHOWN HEREON HAVE BEEN LOCATED AS PART OF THE SURVEY AND ALL OTHER PROPOSED PERIMETER MONUMENTS SHALL BE SET.


TOWNSHIP SUPERVISOR'S CERTIFICATION. THIS PLAN HAS BEEN APPROVED BY THE DOUGLASS TOWNSHIP BOARD OF SUPERVISORS THIS _____ DAY OF _____, 20____.



TOWNSHIP PLANNING AGENCY CERTIFICATION. THIS PLAN HAS BEEN APPROVED BY THE DOUGLASS TOWNSHIP PLANNING AGENCY THIS _____ DAY OF _____, 20____.

TOWNSHIP ENGINEER'S CERTIFICATION. REVIEWED THIS _____ DAY OF _____, 20____, BY THE TOWNSHIP ENGINEER FOR DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PA.

CLIENT: R.B. ASHLEY CUSTOMS, LLC, 1011 RIDGE ROAD, POTTSTOWN, PA 19465. SUBJECT: PRELIMINARY SUBDIVISION AND LAND DEVELOPMENT.

RECEIVED stamp dated FEB 14 2022. DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA. PROJECT NO. 20-374A. DWG. NO. FP120374A. SHEET NO. 1 OF 17.

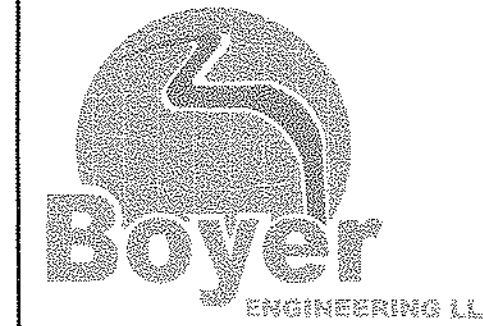

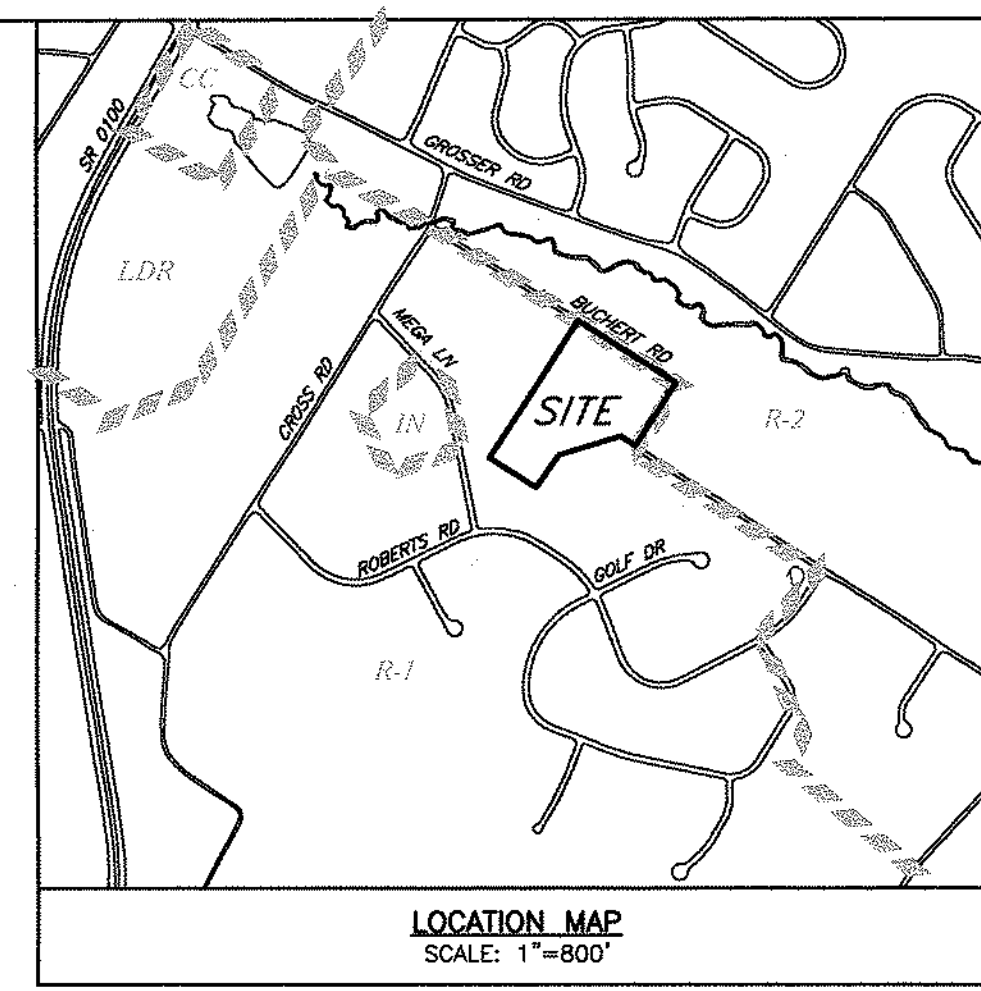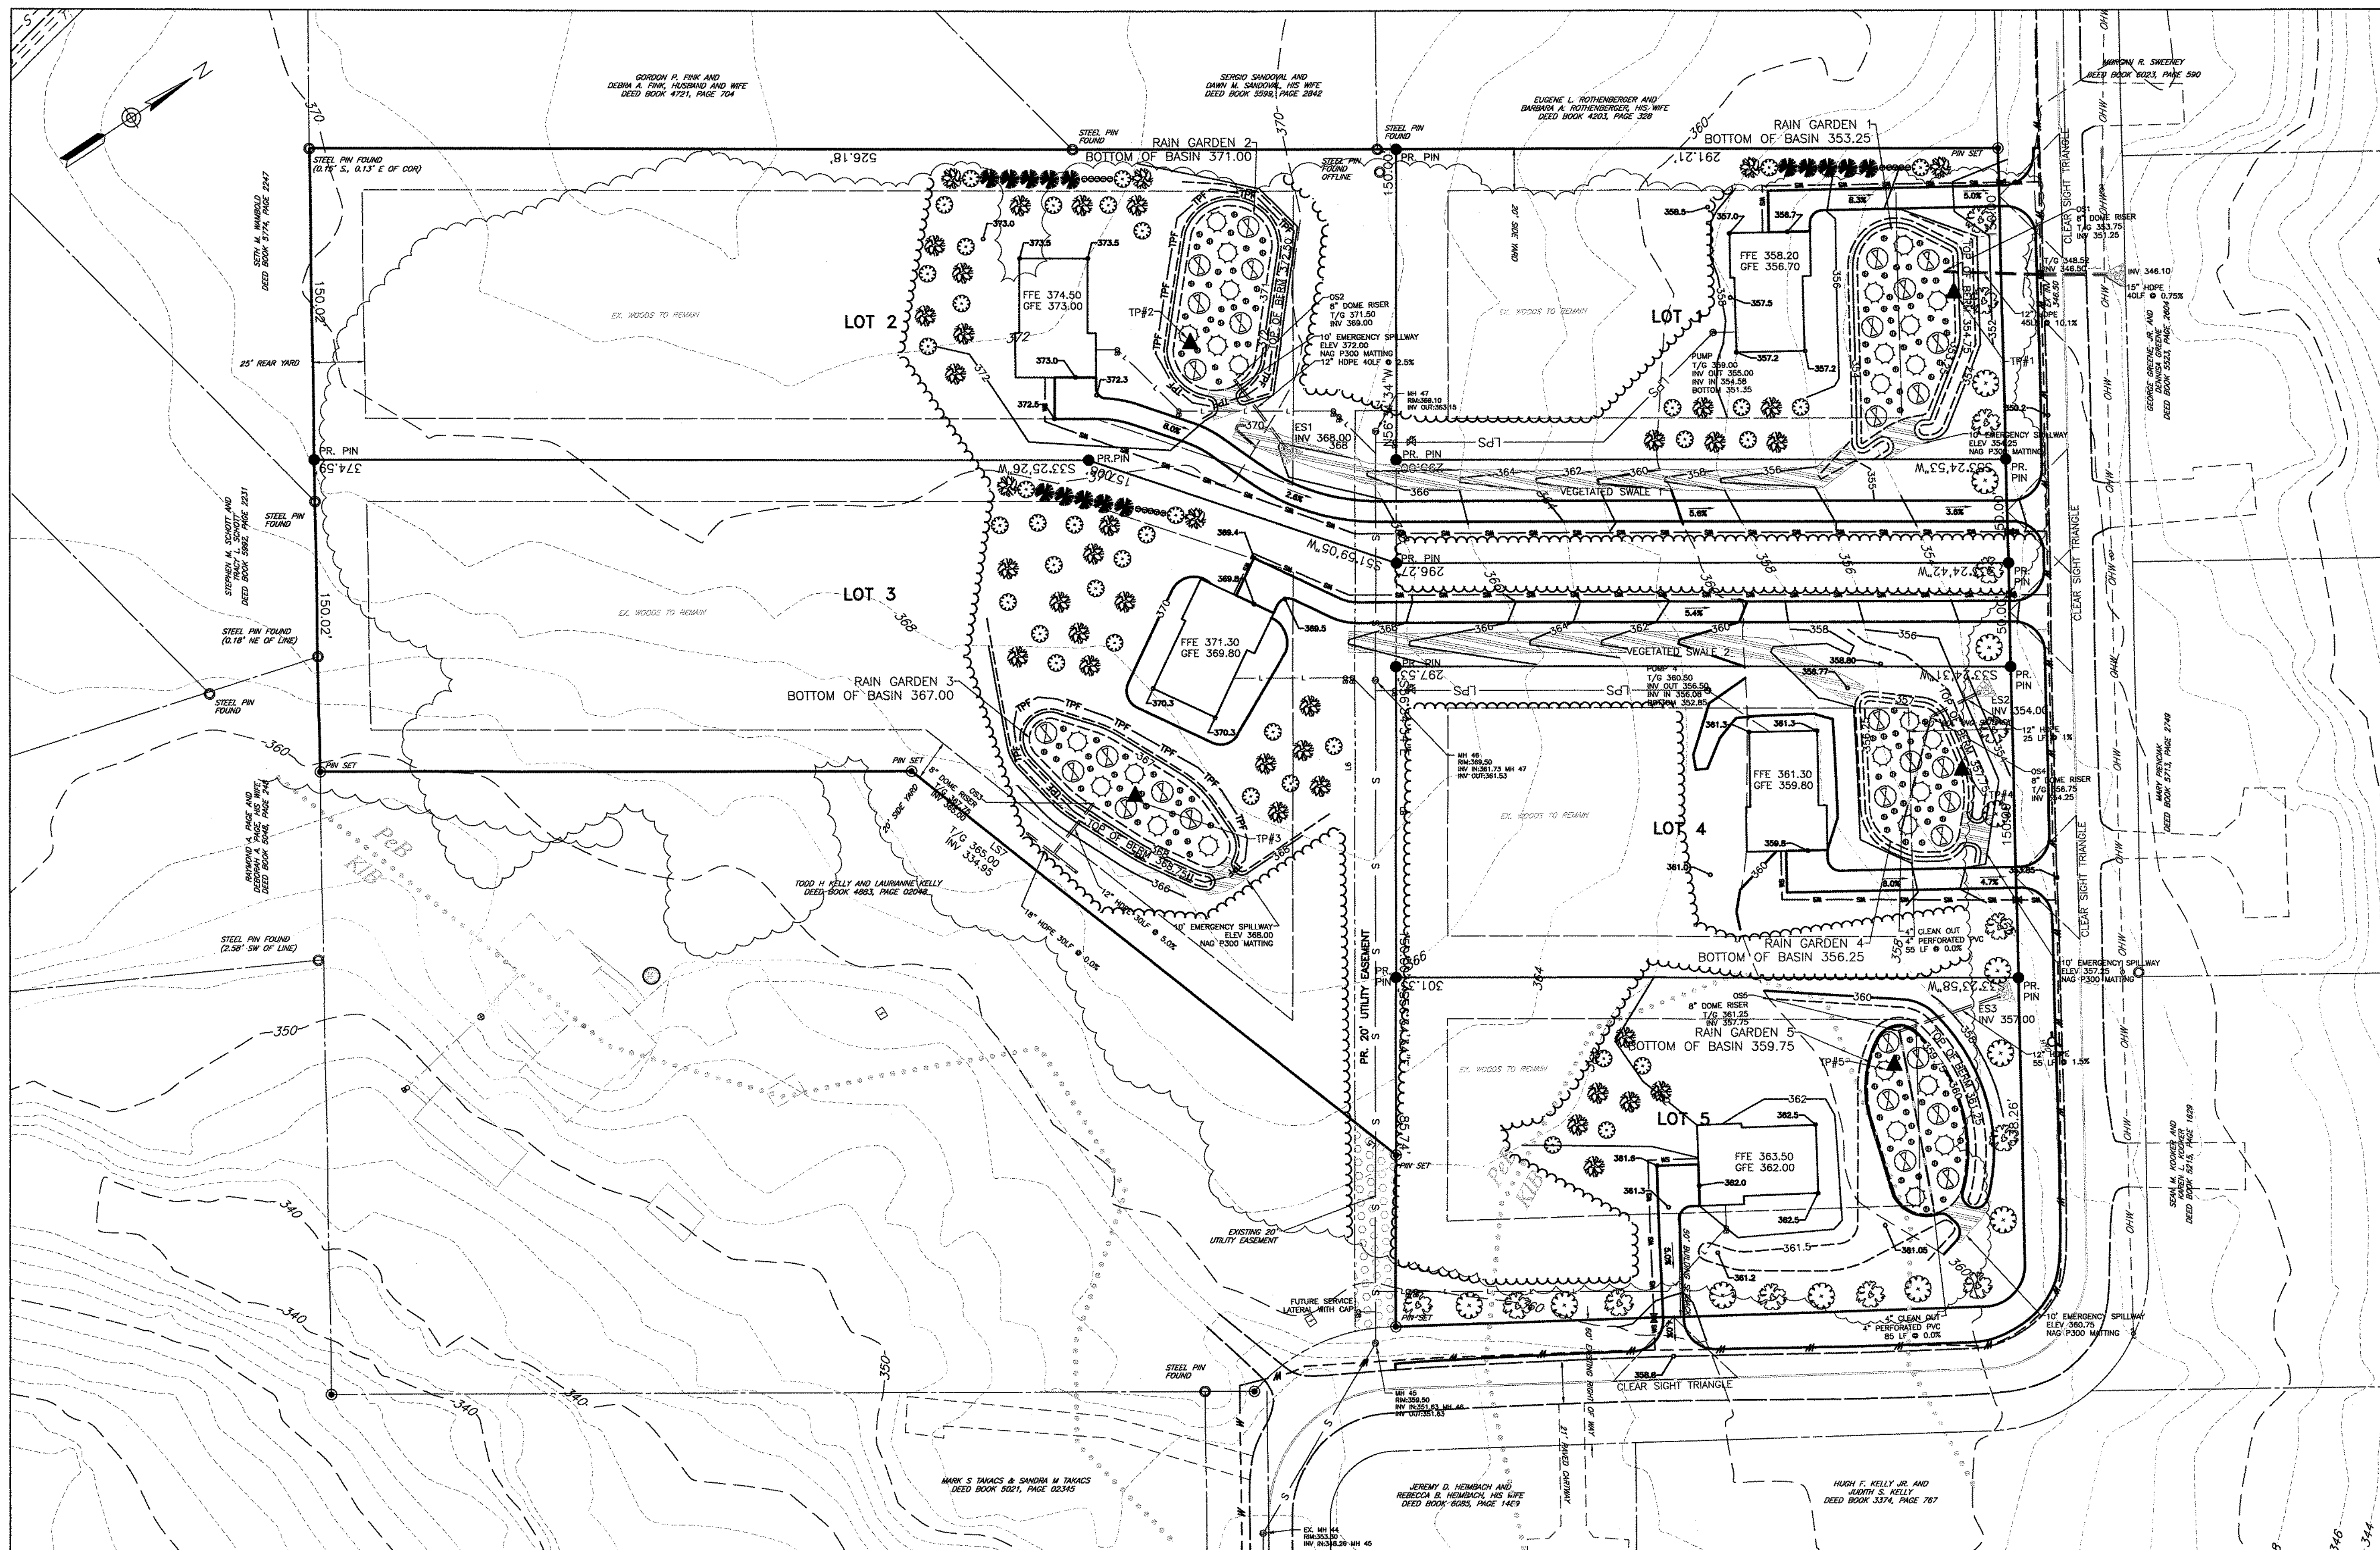

LEGEND

- EX. TRACT LINE
- EX. BOUNDARY
- EX. RIGHT-OF-WAY
- EX. SETBACKS
- EX. SANITARY
- EX. WATER LINE
- EX. MONUMENTATION
- EX. UTILITY POLE & GUY WIRE
- EX. OVERHEAD WIRES
- EX. SANITARY MANHOLE
- EX. FIRE HYDRANT
- EX. TREELINE
- EX. SOILS
- EX. CONTOURS
- PR. CONTOURS
- INFILTRATION TEST PIT
- PR. EDGE OF PAVING
- PR. BUILDING
- PR. WATER SERVICE
- PR. SEWER LATERAL
- PR. FORCE MAIN
- PR. SANITARY SEWER
- PR. TREELINE
- PR. STORMWATER PIPE
- PR. SPILLWAY/CHANNEL LINING
- PR. RIP RAP
- PR. SEWER MANHOLE
- PR. SEWER CLEANOUT
- PR. SEWER SHUTOFF
- PR. WATER VALVE
- PR. TREES

TEST PITS

TEST PIT #	LIMITING ZONE ELEVATION
1	351.25
2	368.83
3	364.00
4	354.17
5	357.75

LANDSCAPE SCHEDULE

SYMBOL	NAME	QUANTITY	NATIVE	ROOT	SIZE
(Symbol)	RED MAPLE, ACER RUBRUM*	15	Y	B&B	MIN 2.5" CAL
(Symbol)	WHITE ASH, FRAXIUS AMERICANA**	50	Y	B&B	MIN 2.5" CAL
(Symbol)	EASTERN WHITE PINE, PINUS STROBUS*	15	Y	B&B	MIN 2.5" CAL
(Symbol)	PIN OAK, QUERCUS PALUSTRIS*	40	Y	B&B	MIN 2.5" CAL
(Symbol)	INKBERRY HOLLY, ILEX GLABRA*	15	Y	HT	MIN 18"

*STREET TREES **BUFFER TREES

TREE REPLACEMENT:
 TREES REMOVED - 136 GREATER THAN 12"
 NATIVE TREES 12" TO 18" DIA. - 30
 NATIVE TREES GREATER THAN 18" - 14


REPLACEMENT CALCULATIONS:
 FOR TREES 12" TO 18"
 1 TREE FOR EACH REMOVED - 30 TREES PROPOSED

FOR TREES 18" OR GREATER
 2 TREES FOR EACH REMOVED - 28 TREES

TOTAL TREES REQUIRED - 58
TOTAL TREES PROPOSED - 58

SOILS TABLE

SYMBOL	NAME/DESC
PaB	PENN SILTY LOAM, 3 TO 8 PERCENT SLOPES
KIB	KUNESVILLE CHANNERY SILT LOAM, 3 TO 8 PERCENT SLOPES

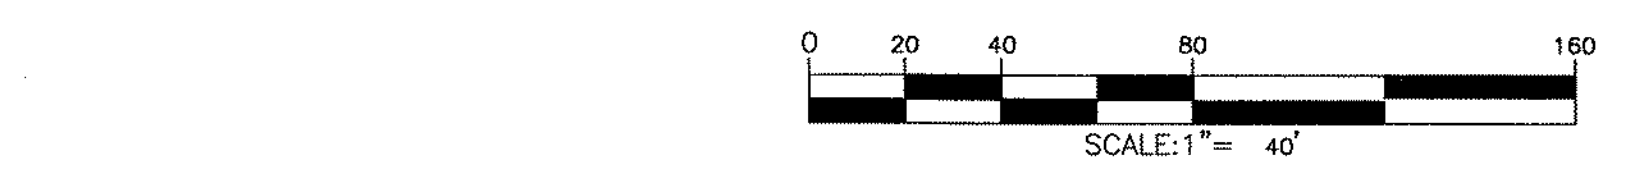

LANDSCAPING CERTIFICATION

I HEREBY CERTIFY THAT THE TREE SURVEY AND LANDSCAPING PLAN SHOWN AND DESCRIBED HEREON HAVE BEEN COMPLETED PER REQUIREMENTS SET FORTH IN THE DOUGLASS TOWNSHIP SUBDIVISION AND LAND DEVELOPMENT ORDINANCE.

BRIAN D. BOYER, PE
 DATE

CLIENT: R.B. ASHLEY CUSTOMS, LLC
 1011 RIDGE ROAD
 POTTSTOWN, PA 19465

SUBJECT: KELLY ACRES
 DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA


PROJECT NO.: 20-374A
 DWG. NO.: GR120374A
 SHEET NO.: 2 OF 17

DESIGN: BOB CHKD. BY: BOB
 DRAWN BY: WJD CHKD. BY:
 DATE: 2020-09-04 SCALE: 1"=40'

1860 WEAVERTOWN ROAD, SUITE 100
 DOUGLASSVILLE, PA 19518
 PHONE: 610-689-8021
 FAX: 610-689-4536

Boyer ENGINEERING LLC

P:\PROJECTS\20-374A_Robins - Kelly LaVigne\PT120374A.dwg, 08-Feb-22, 12:02:58

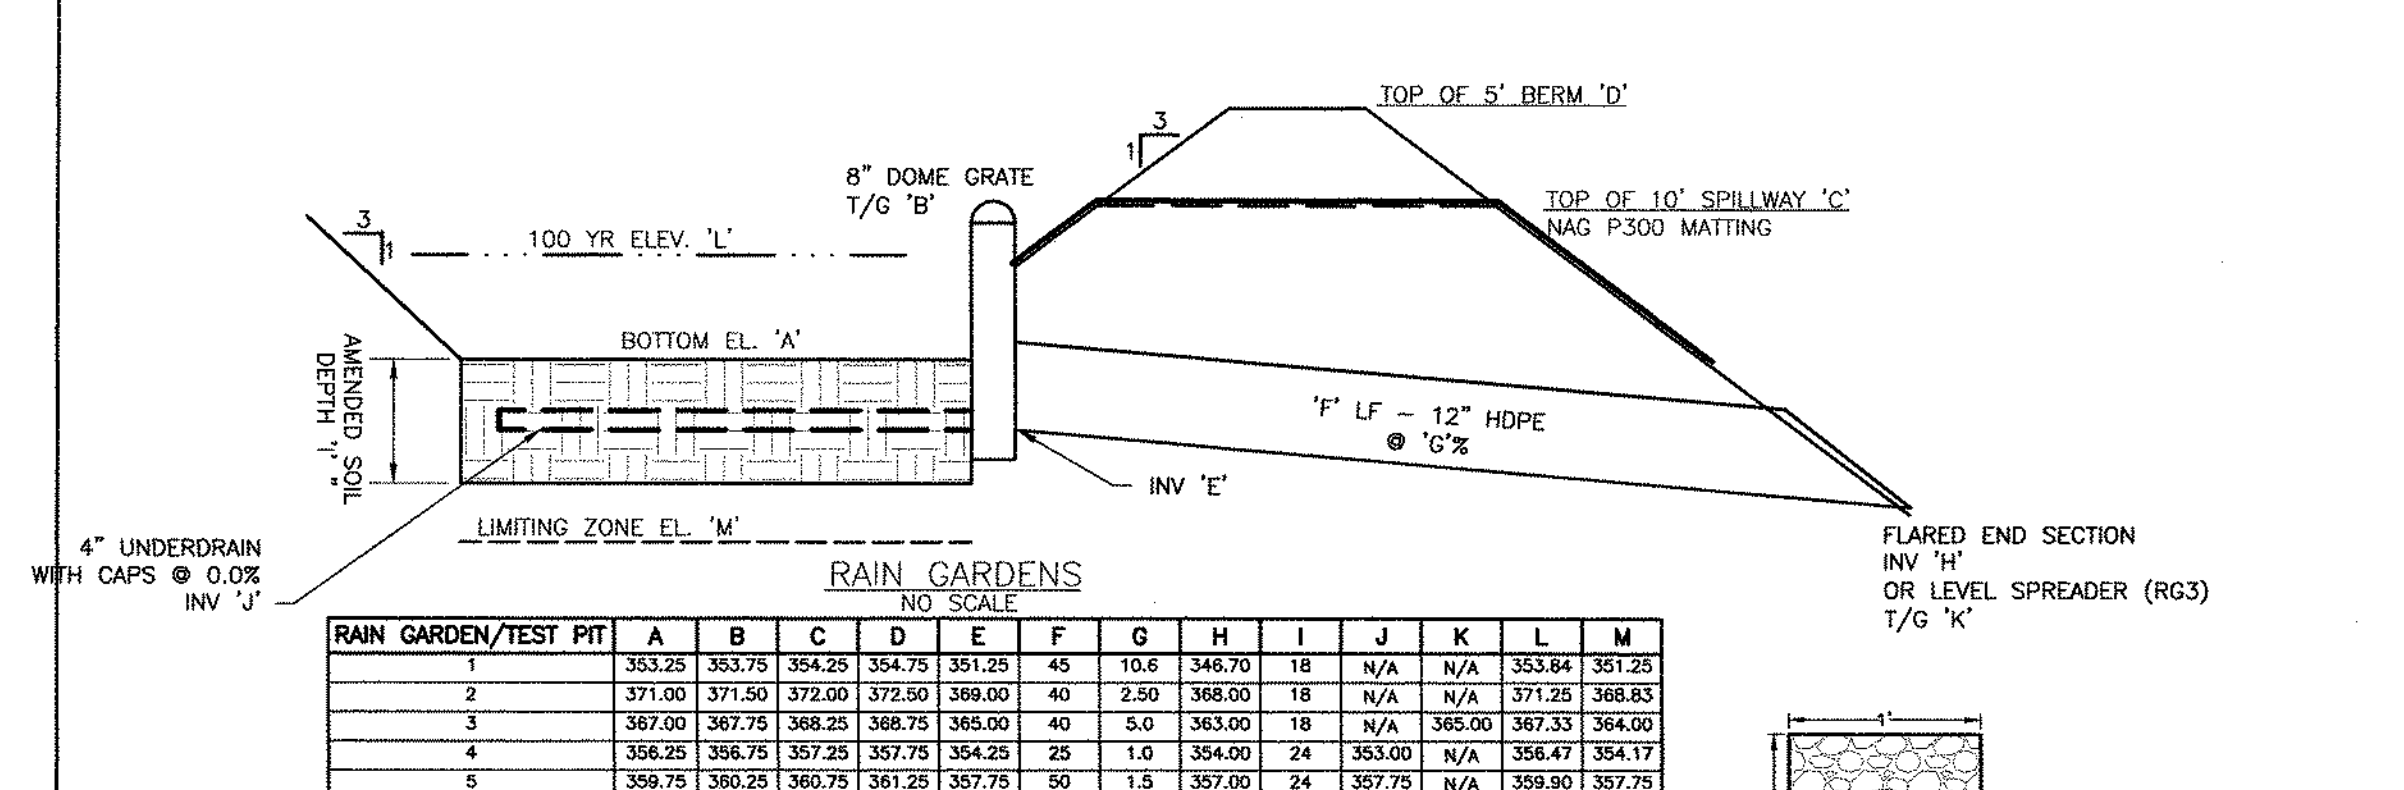



RAIN GARDEN/TEST PIT	A	B	C	D	E	F	G	H	I	J	K	L	M
1	353.25	353.75	354.25	354.75	355.25	45	10.6	346.75	18	N/A	N/A	353.84	351.25
2	371.00	371.50	372.00	372.50	373.00	40	2.50	368.00	18	N/A	N/A	371.25	368.83
3	367.00	367.75	368.25	368.75	369.00	40	5.0	363.00	18	N/A	N/A	365.00	367.33
4	356.25	356.75	357.25	357.75	358.25	25	1.0	354.00	24	353.00	N/A	356.47	354.17
5	359.75	360.25	360.75	361.25	361.75	50	1.5	357.00	24	357.75	N/A	359.90	357.75

NOTES FOR RAIN GARDEN AND INFILTRATION BASINS:


- ALL BASIN EMBANKMENTS SHALL BE PLACED AT A MAXIMUM OF EIGHT (8') LIFTS TO A MINIMUM OF 95% OF MAXIMUM DRY DENSITY AS ESTABLISHED BY ASTM D-1557. PRIOR TO PROCEEDING TO THE NEXT LIFT, THE COMPACTION SHALL BE CHECKED BY THE TOWNSHIP ENGINEER. THE DEVELOPER'S CONTRACTOR SHALL OBTAIN THE SERVICES OF A QUALIFIED LABORATORY TECHNICIAN TO CONDUCT COMPACTION TESTS ON THE LEADING AND THE TRAILING EDGE OF THE BERM ALONG WITH THE TOP OF THE BERM. ALL TEST SHALL BE FURNISHED TO THE TOWNSHIP FOR REVIEW.
- A CLAY CORE SHALL BE PROVIDED FOR THE BERM WITH A TOP ELEVATION AT THE PRINCIPAL SPILLWAY ELEVATION. MINIMUM TOP WIDTH OF 2' AND SIDE SLOPE OF 1:1.
- A KEY TRENCH SHALL BE PROVIDED UNDER FILL EMBANKMENTS. THE KEY TRENCH SHALL BE A MINIMUM OF 8' WIDE, 2' BELOW EXISTING GRADE, WITH SIDE SLOPES OF 1:1.

MAINTENANCE:

- THE OVERLYING VEGETATION OF SUBSURFACE INFILTRATION FEATURES SHOULD BE MAINTAINED IN GOOD CONDITION, AND ANY BARE SPOTS RE-VEGETATED AS SOON AS POSSIBLE.
- VEHICULAR ACCESS ON SUBSURFACE INFILTRATION AREAS SHOULD BE PROHIBITED, AND CARE SHOULD BE TAKEN TO AVOID EXCESSIVE COMPACTION BY MOWERS. IF ACCESS IS NEEDED, USE OF PERMEABLE, TURF REINFORCEMENT SHOULD BE CONSIDERED.

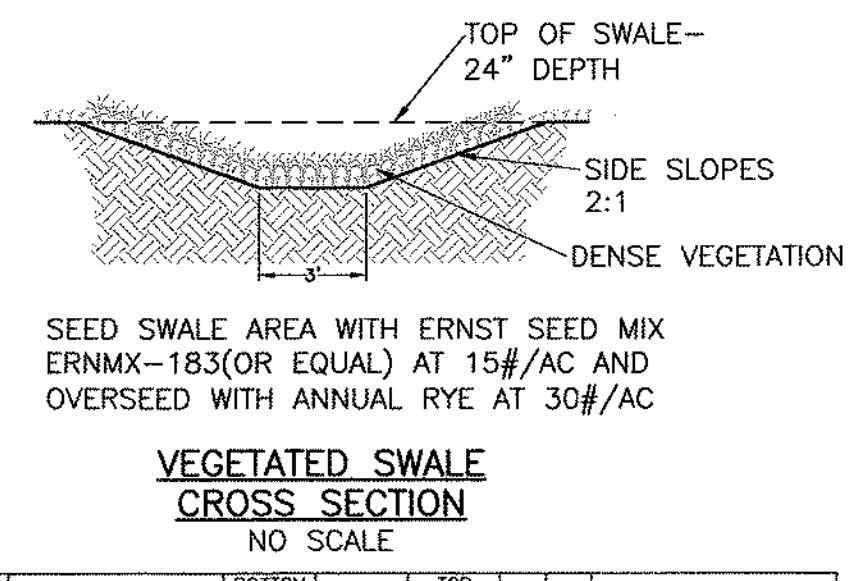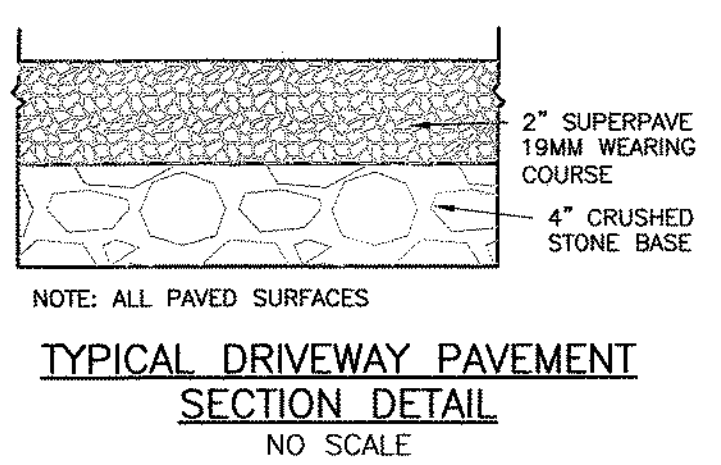

CHANNEL NO.	STATIONS	BOTTOM WIDTH (FT)	DEPTH (FT)	TOP WIDTH (FT)	Z1 (FT)	Z2 (FT)	LINING *
1	N/A	2	2	10	2	2	N.A.G. STS
2	N/A	2	2	10	2	2	N.A.G. STS

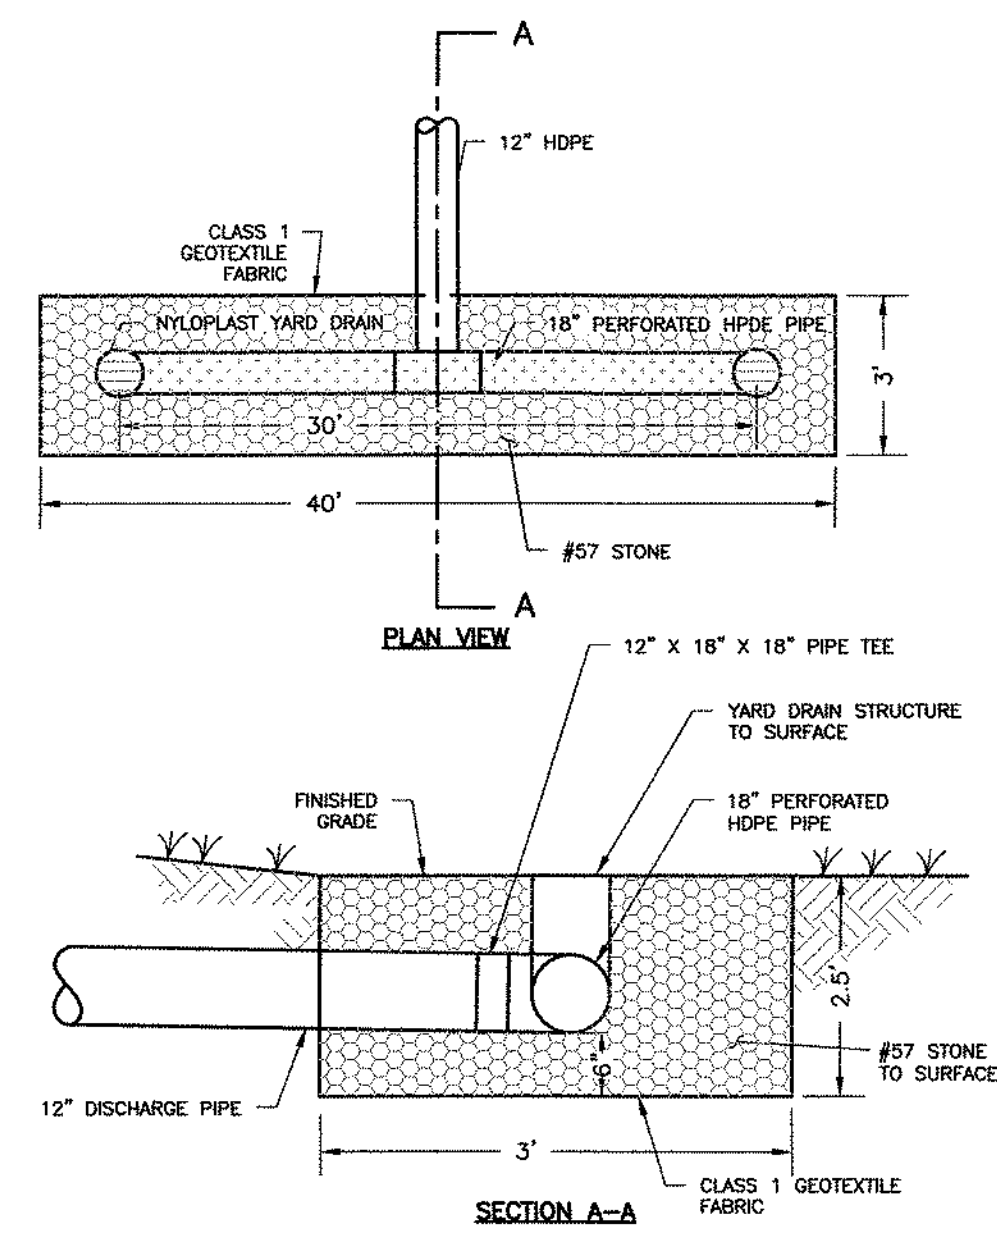

NOTES

- SPREADER IS TO BE 30' IN LENGTH.
- OUTFALL PIPE IS TO BE TERMINATED IN "T" COUPLING.
- YARD DRAIN BASINS OR INLINE COUPLINGS SHALL BE USED WITH SURFACE GRATES AT EACH OF THE PERFORATED PIPE TO THE SURFACE.

NYLOPLAST 18" INLINE DRAIN: 2718AG __X

ADAPTER SIZE

4"	14.00
6"	14.00
8"	14.00
10"	14.00
12"	14.00
14"	13.50
16"	8.25



TRAFFIC LOADS: CONCRETE SLAB DIMENSIONS ARE FOR GUIDELINE PURPOSES ONLY. ACTUAL CONCRETE SLAB MUST BE DESIGNED TAKING INTO CONSIDERATION LOCAL SOIL CONDITIONS, TRAFFIC LOADING, & OTHER APPLICABLE DESIGN FACTORS. SEE DRAWING NO. 7001-110-111 FOR NON TRAFFIC INSTALLATION.

GRATE OPTIONS

GRATE OPTIONS	LOAD RATING	PART #	DRAWING #
PLATED IRON	MEETS H-20	1899CSP	7001-110-012
STANDARD	MEETS H-20	1899CSD	7001-110-011
GOLD COVER	MEETS H-20	1899COC	7001-110-014
COBLE	N/A	1899COC	7001-110-015
DROP IN GRATE	LIGHT DUTY	1891CI	7001-110-016



18 IN INLINE DRAIN CHECK SPEC INSTALLATION DETAIL

1500-110-010-010

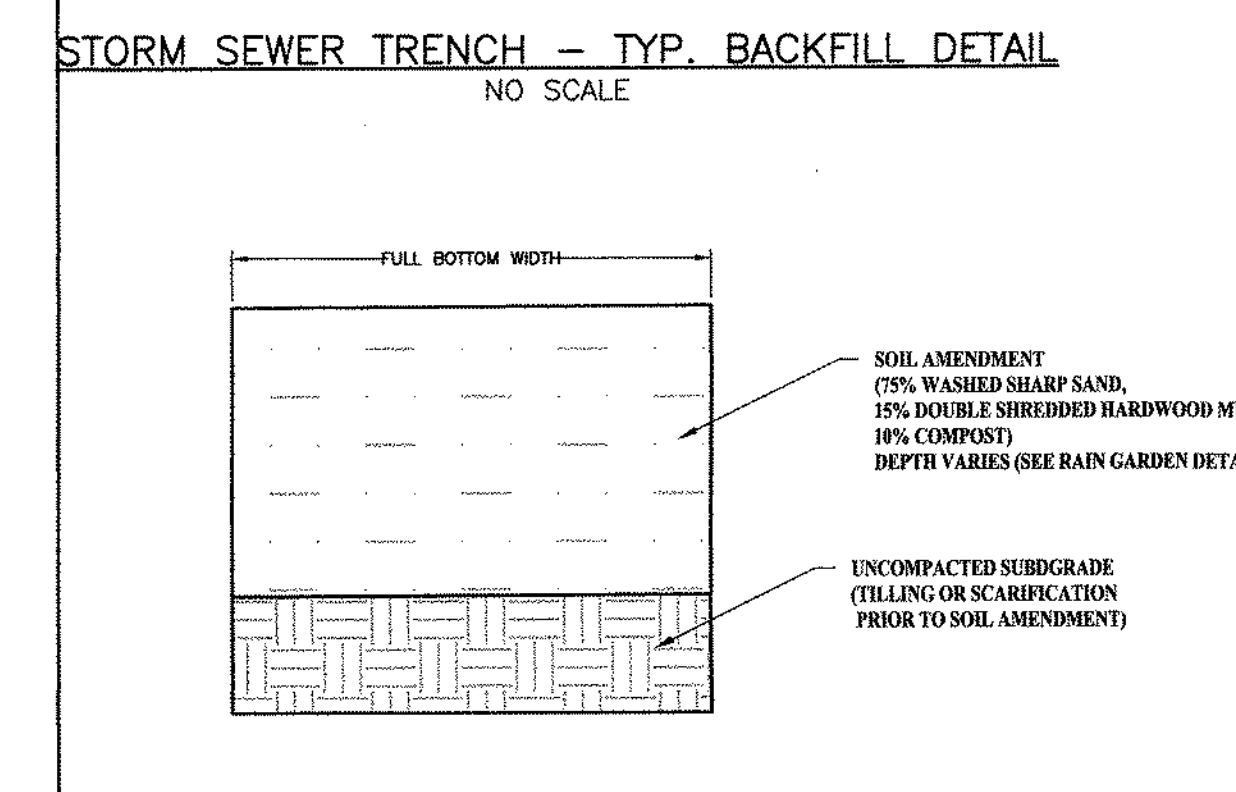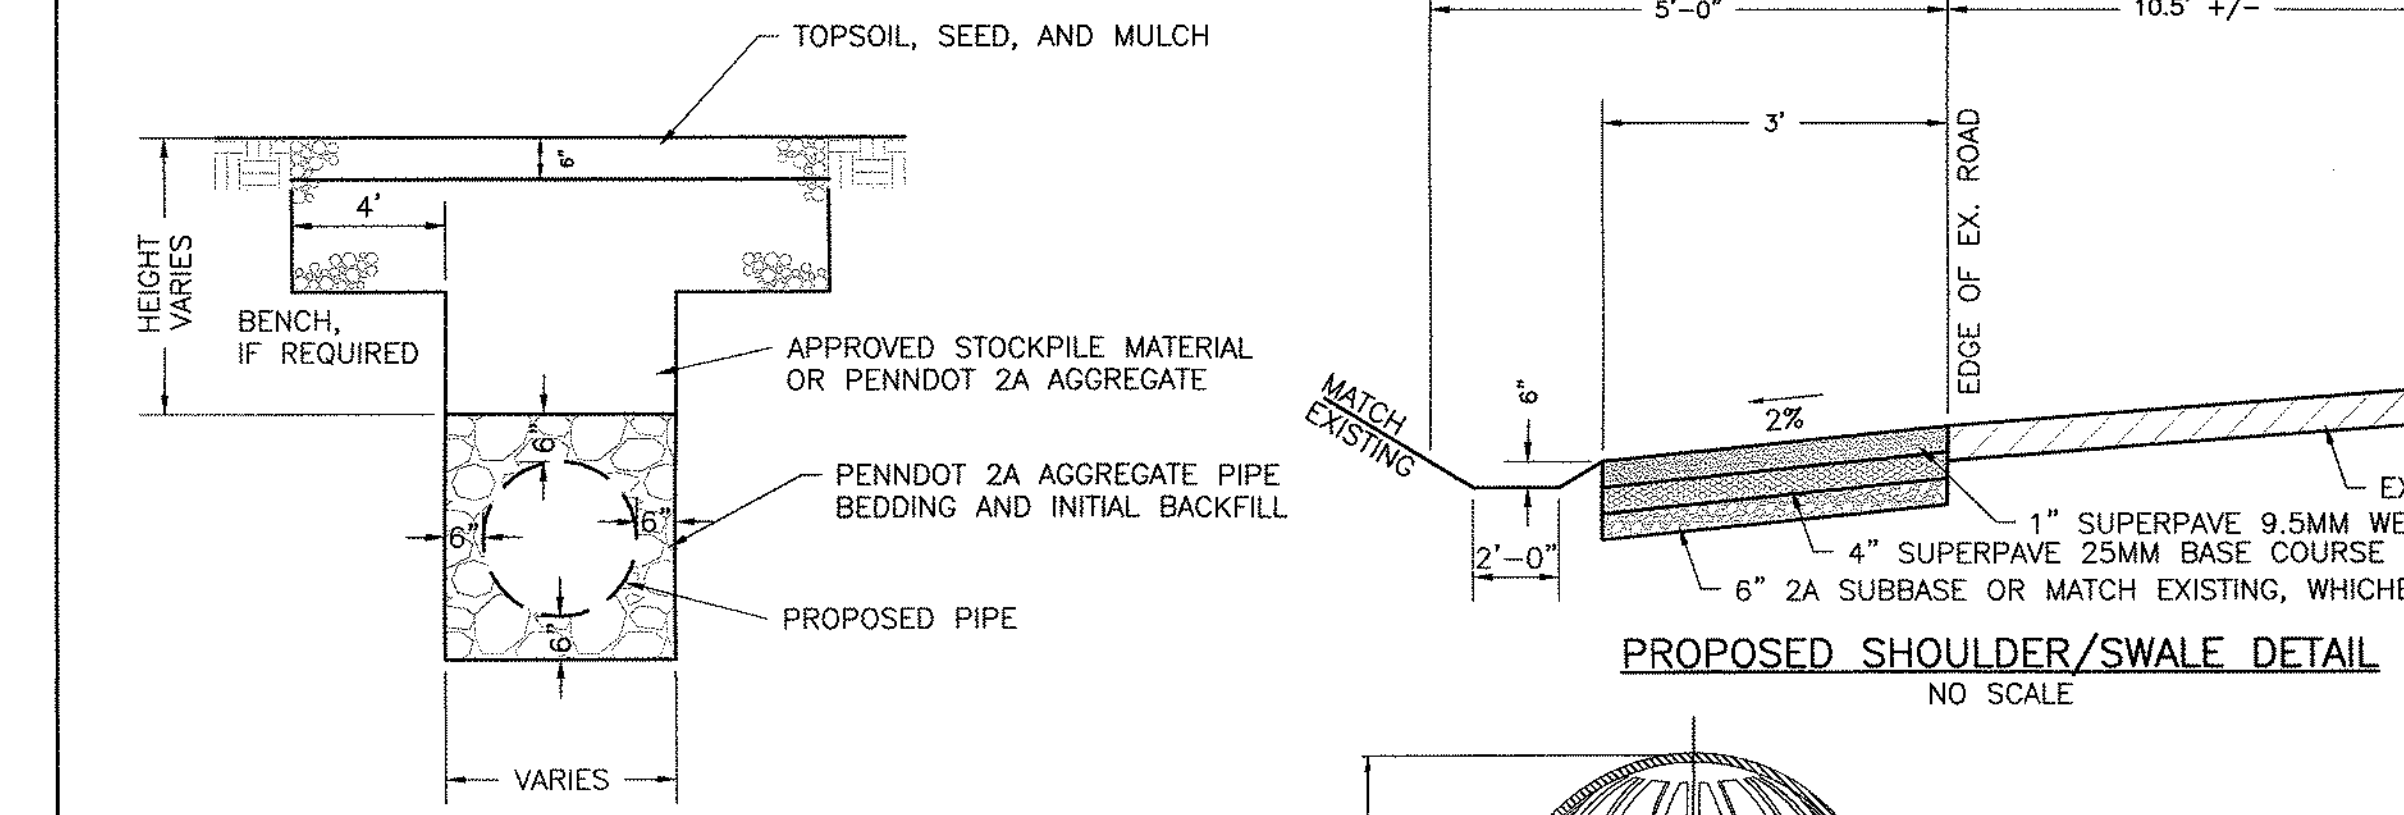

CONSTRUCTION NOTES:

- SOIL AMENDMENT CAN CONSIST OF COMPOST, MULCH AND SAND.
- AMENDED SOILS SHALL NOT BE PLACED ON SLOPES GREATER THAN 4:1.
- AMENDED SOILS SHALL NOT BE CONSTRUCTED WITHIN THE DRIP LINE OF EXISTING TREES.
- PERMANENT PLANTINGS/SEEDING SHALL BE IMMEDIATELY INSTALLED ON THE SURFACE BY HAND TO MINIMIZE COMPACTION.

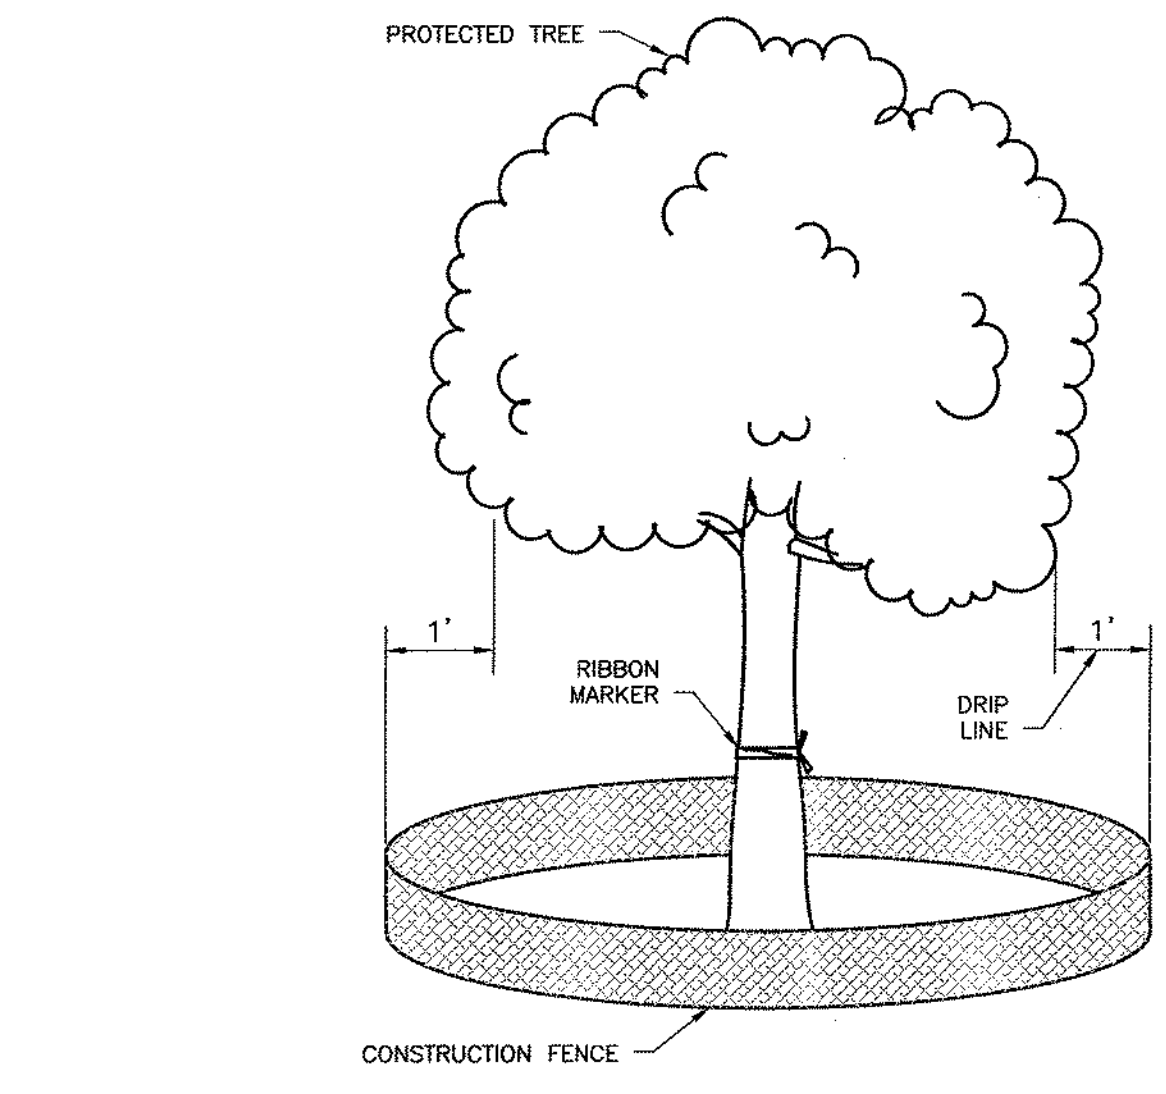
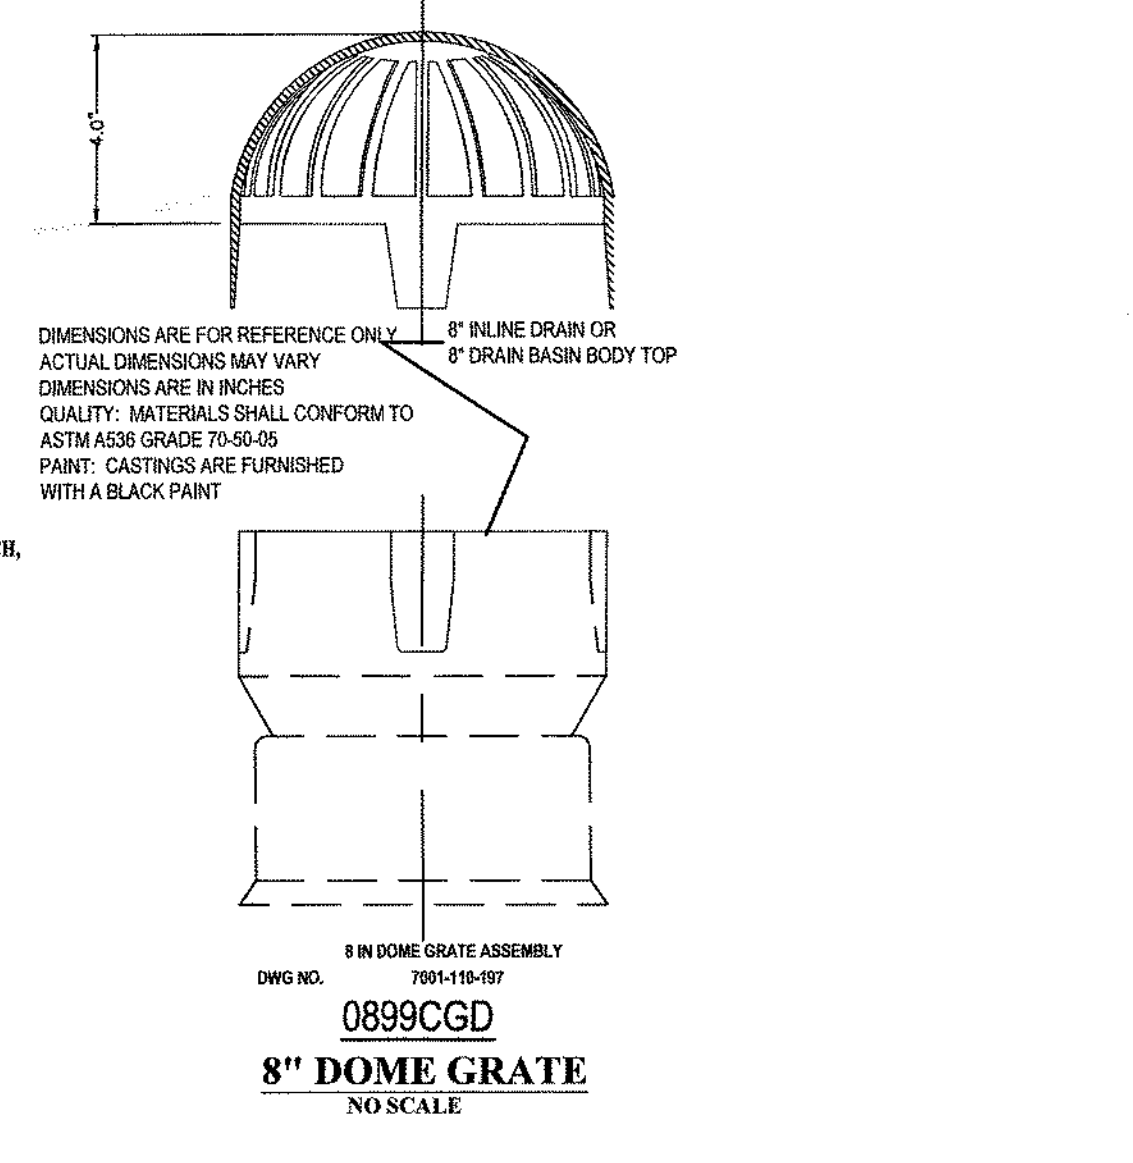


NOTES:




- MARK TREE TO BE PROTECTED WITH RIBBON PRIOR TO CONSTRUCTION.
- INSTALL CONSTRUCTION FENCE 1 FT OUTSIDE THE PERIMETER OF THE DRIP LINE OF THE MARKED TREES. (FOR TREE CLUSTERS INSTALL ALONG COMBINED PERIMETER.)
- WHEN CONSTRUCTION IS COMPLETED, REMOVE FENCING.
- ANY DAMAGE, DESTRUCTION OR FALLING OF A TREE SLATED FOR PROTECTION SHALL REQUIRE REPLACEMENT WITH A TREE OF SIMILAR CALIPER OR SUCH NUMBER OF TREES AS ARE REQUIRED TO EQUAL THE CIRCUMFERENCE OF THE AFFECTED TREE.

HDPE END SECTION PIPE DIAMETER, in.

DIMENSION	10/12	15	18	24	30	36
A	42	41	49	59-1/2	88	88
B	14-1/2	19	22	28	36	43
C	33	34	43	48	63-1/2	66-1/2
D	6	6	6	6	6	6

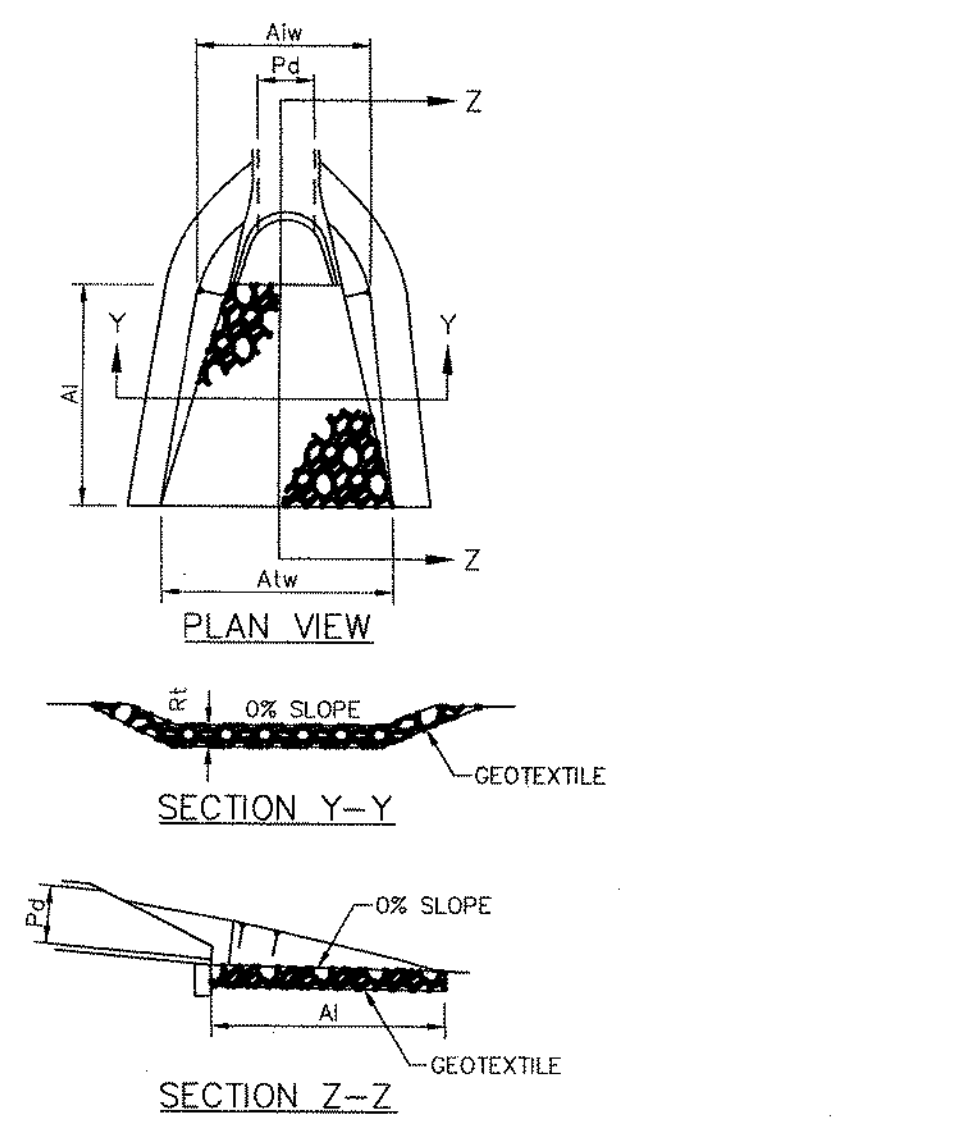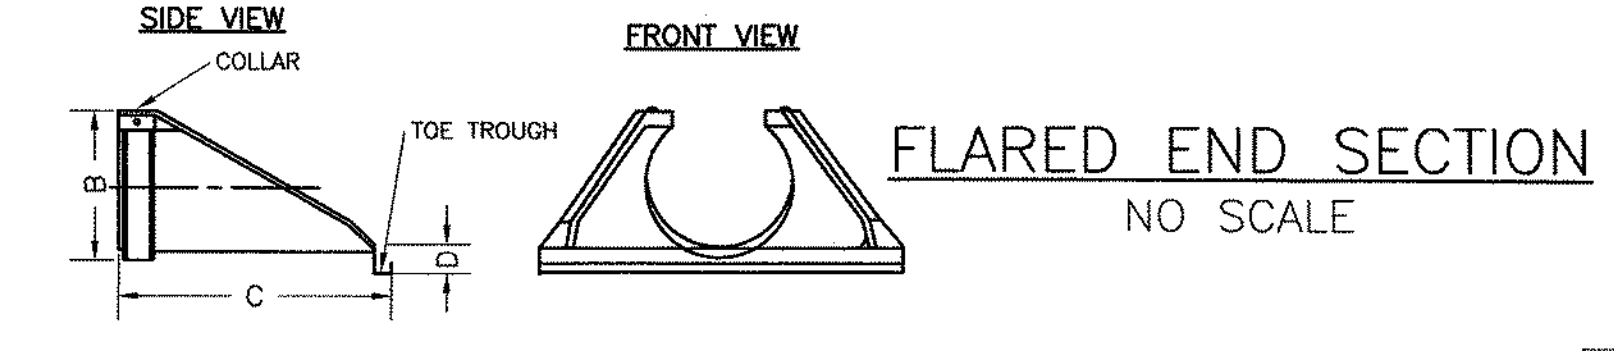

OUTLET NO.	PIPE DIA Pd (IN)	RIPRAP S/ZE (IN)	THICK Rt (IN)	LENGTH AI (FT)	APRON INITIAL WIDTH AIw (FT)	TERMINAL WIDTH AIw (FT)
ALL	12	4	18	8	3	11

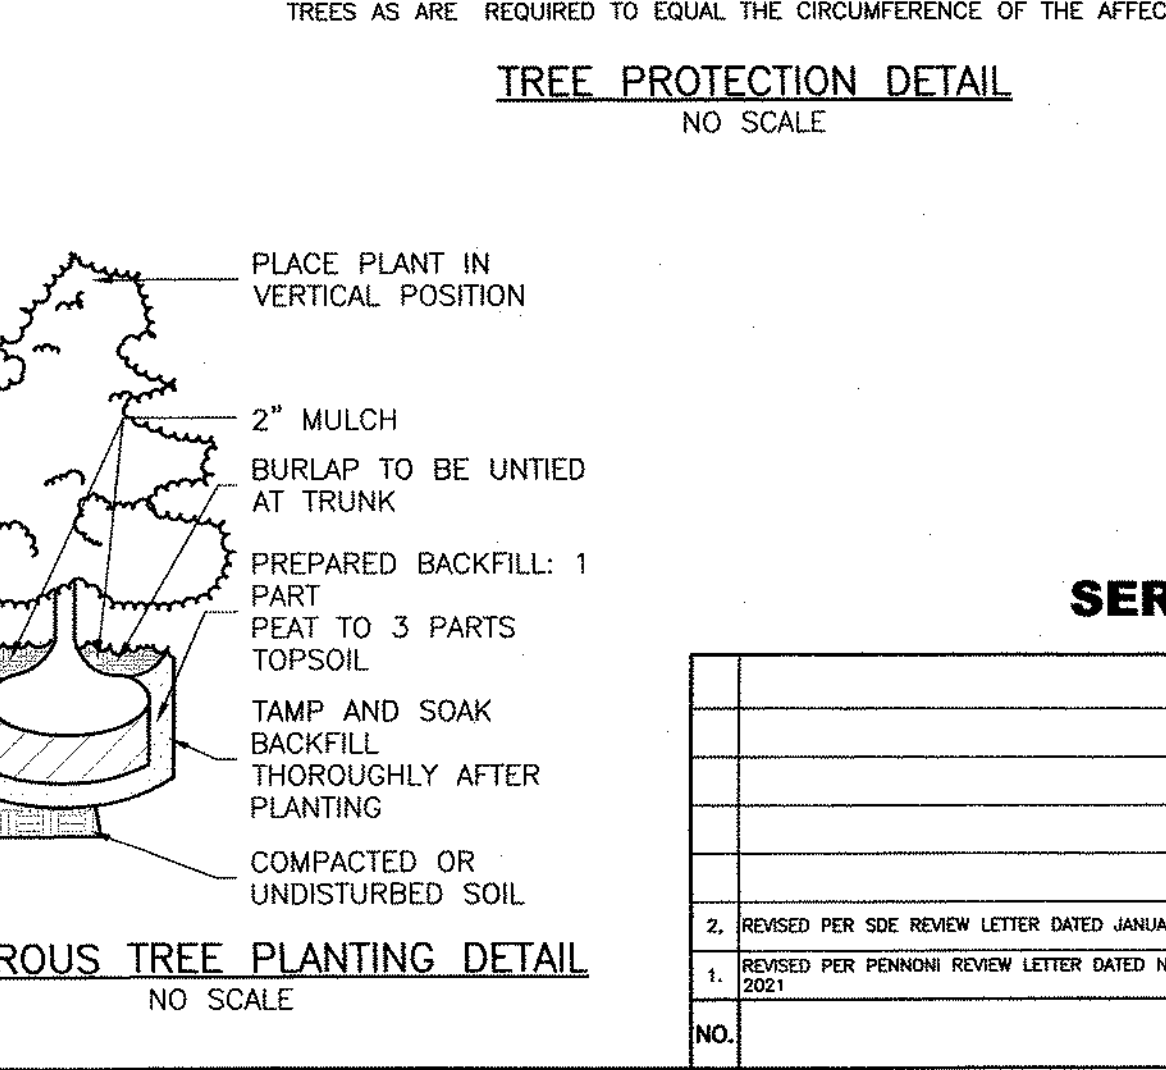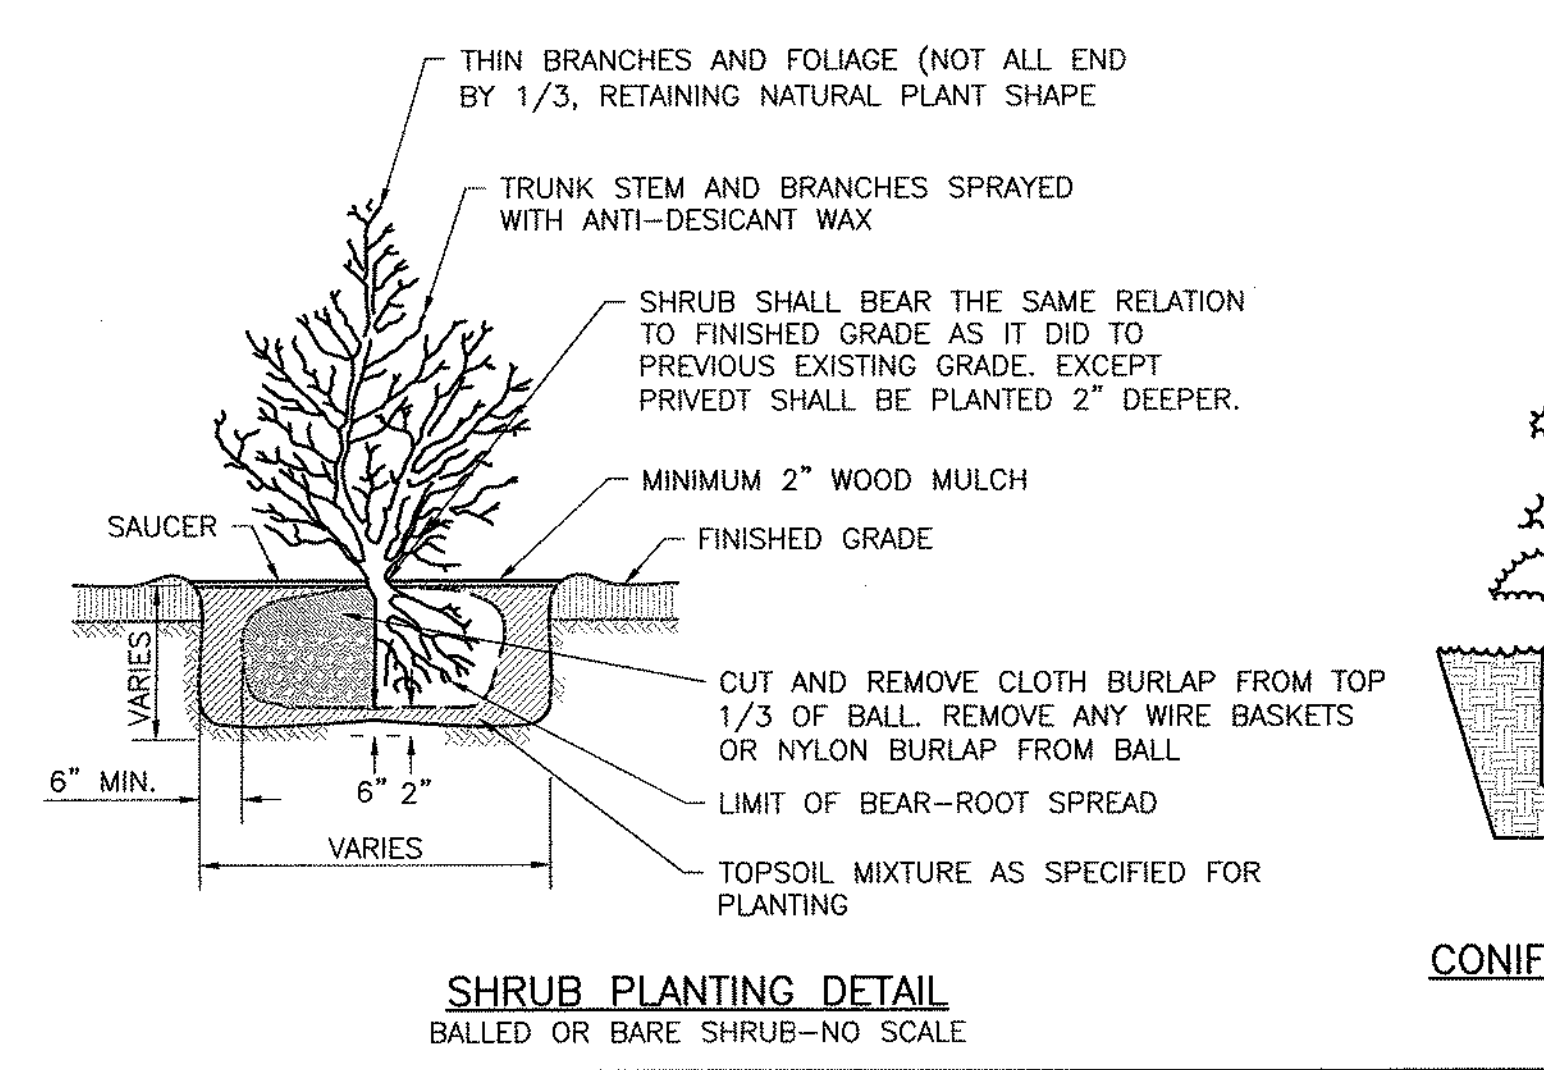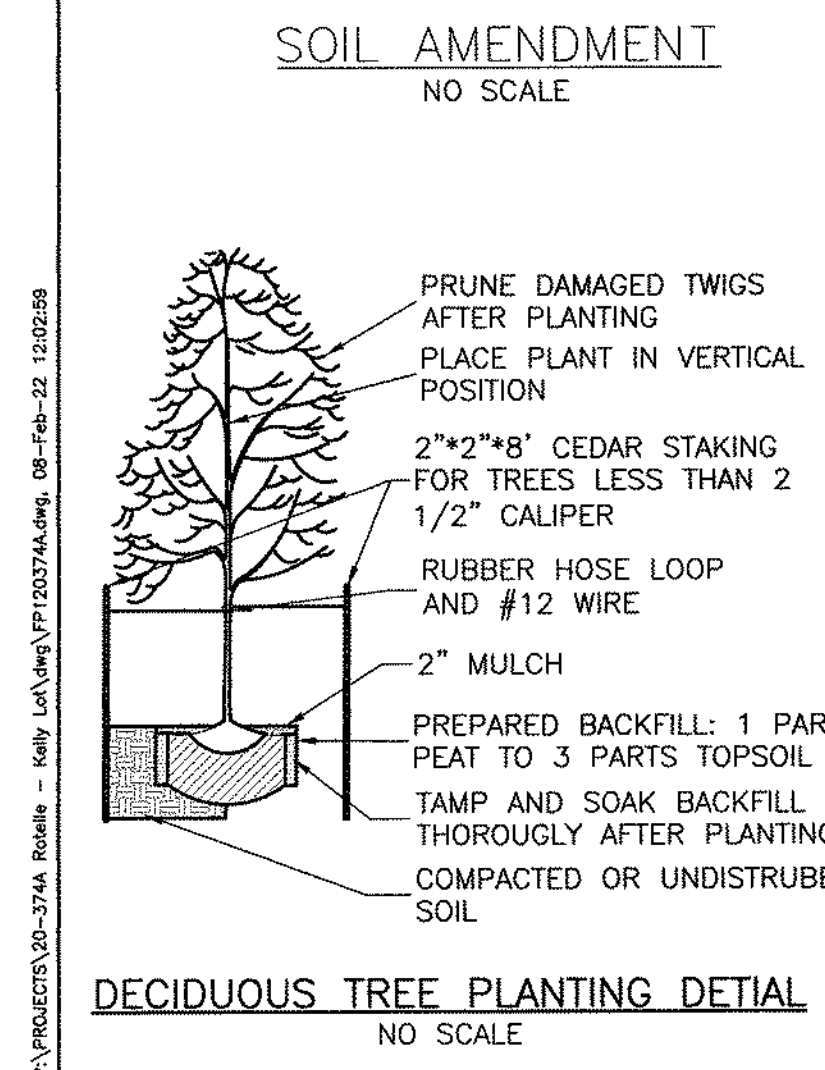

811

Know what's below Call Before You Dig!

BEFORE YOU DIG ANYWHERE IN PENNSYLVANIA CALL 1-800-242-1776

NON MEMBERS MUST BE CONTACTED DIRECTLY PA LAW REQUIRES THREE WORKING DAYS NOTICE TO UTILITIES BEFORE YOU EXCAVATE, DRILL, BLAST OR DEMOLISH

SERIAL NO. 20211613280 (DOUGLASS TWP)

CLIENT
R.B. ASHLEY CUSTOMS, LLC
1011 RIDGE ROAD
POITSTOWN, PA 19465

SUBJECT
KELLY ACRES
DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA

DETAILS SHEET


1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518
PHONE: 610-689-8021
FAX: 610-689-4538

PROJECT NO. 20-374A
DWG. NO. DE120374A
SHEET NO. 3 OF 17


DESIGN BDB **CHKD. BY** BDB
DRAWN BY WJD **CHKD. BY** BDB
DATE 2020-09-04 **SCALE** NOT TO SCALE

Boyer ENGINEERING LLC


P:\PROJECTS\20-374A_Roads - Kelly_LaVigne\FP12021613280.dwg, 08-Feb-22, 10:02:59

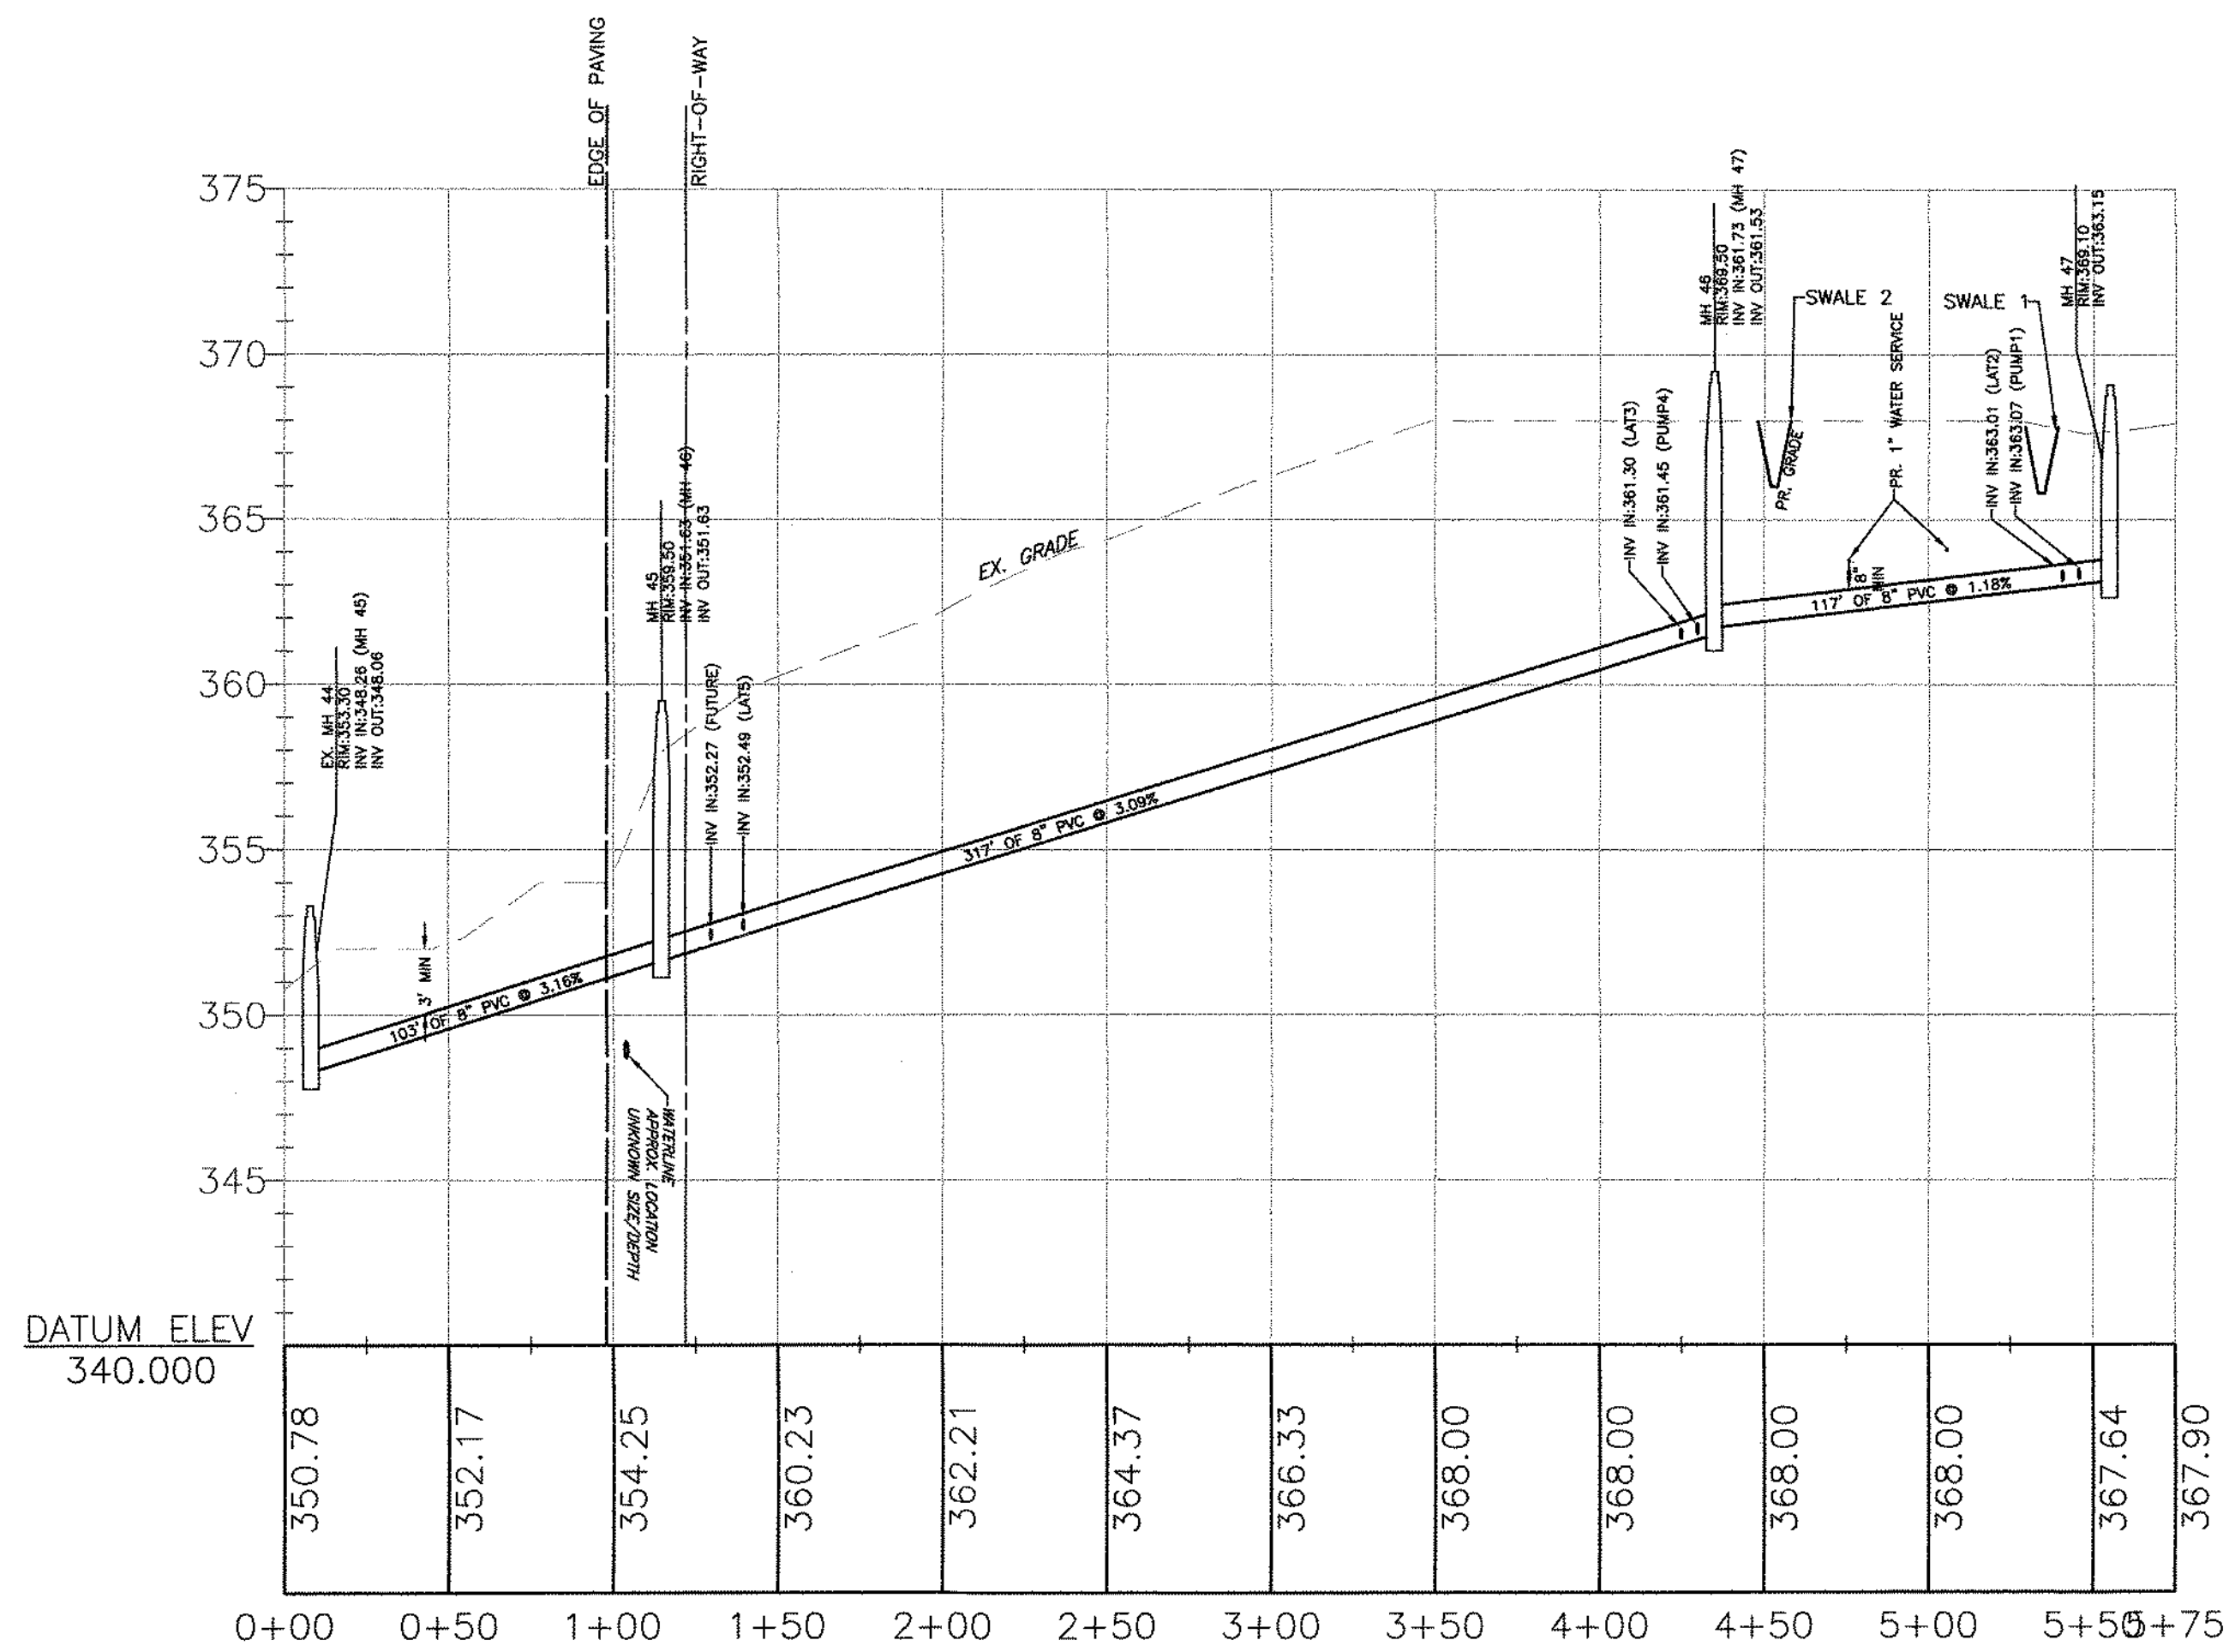


PROFILE: PR. SANITARY SEWER MAIN
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

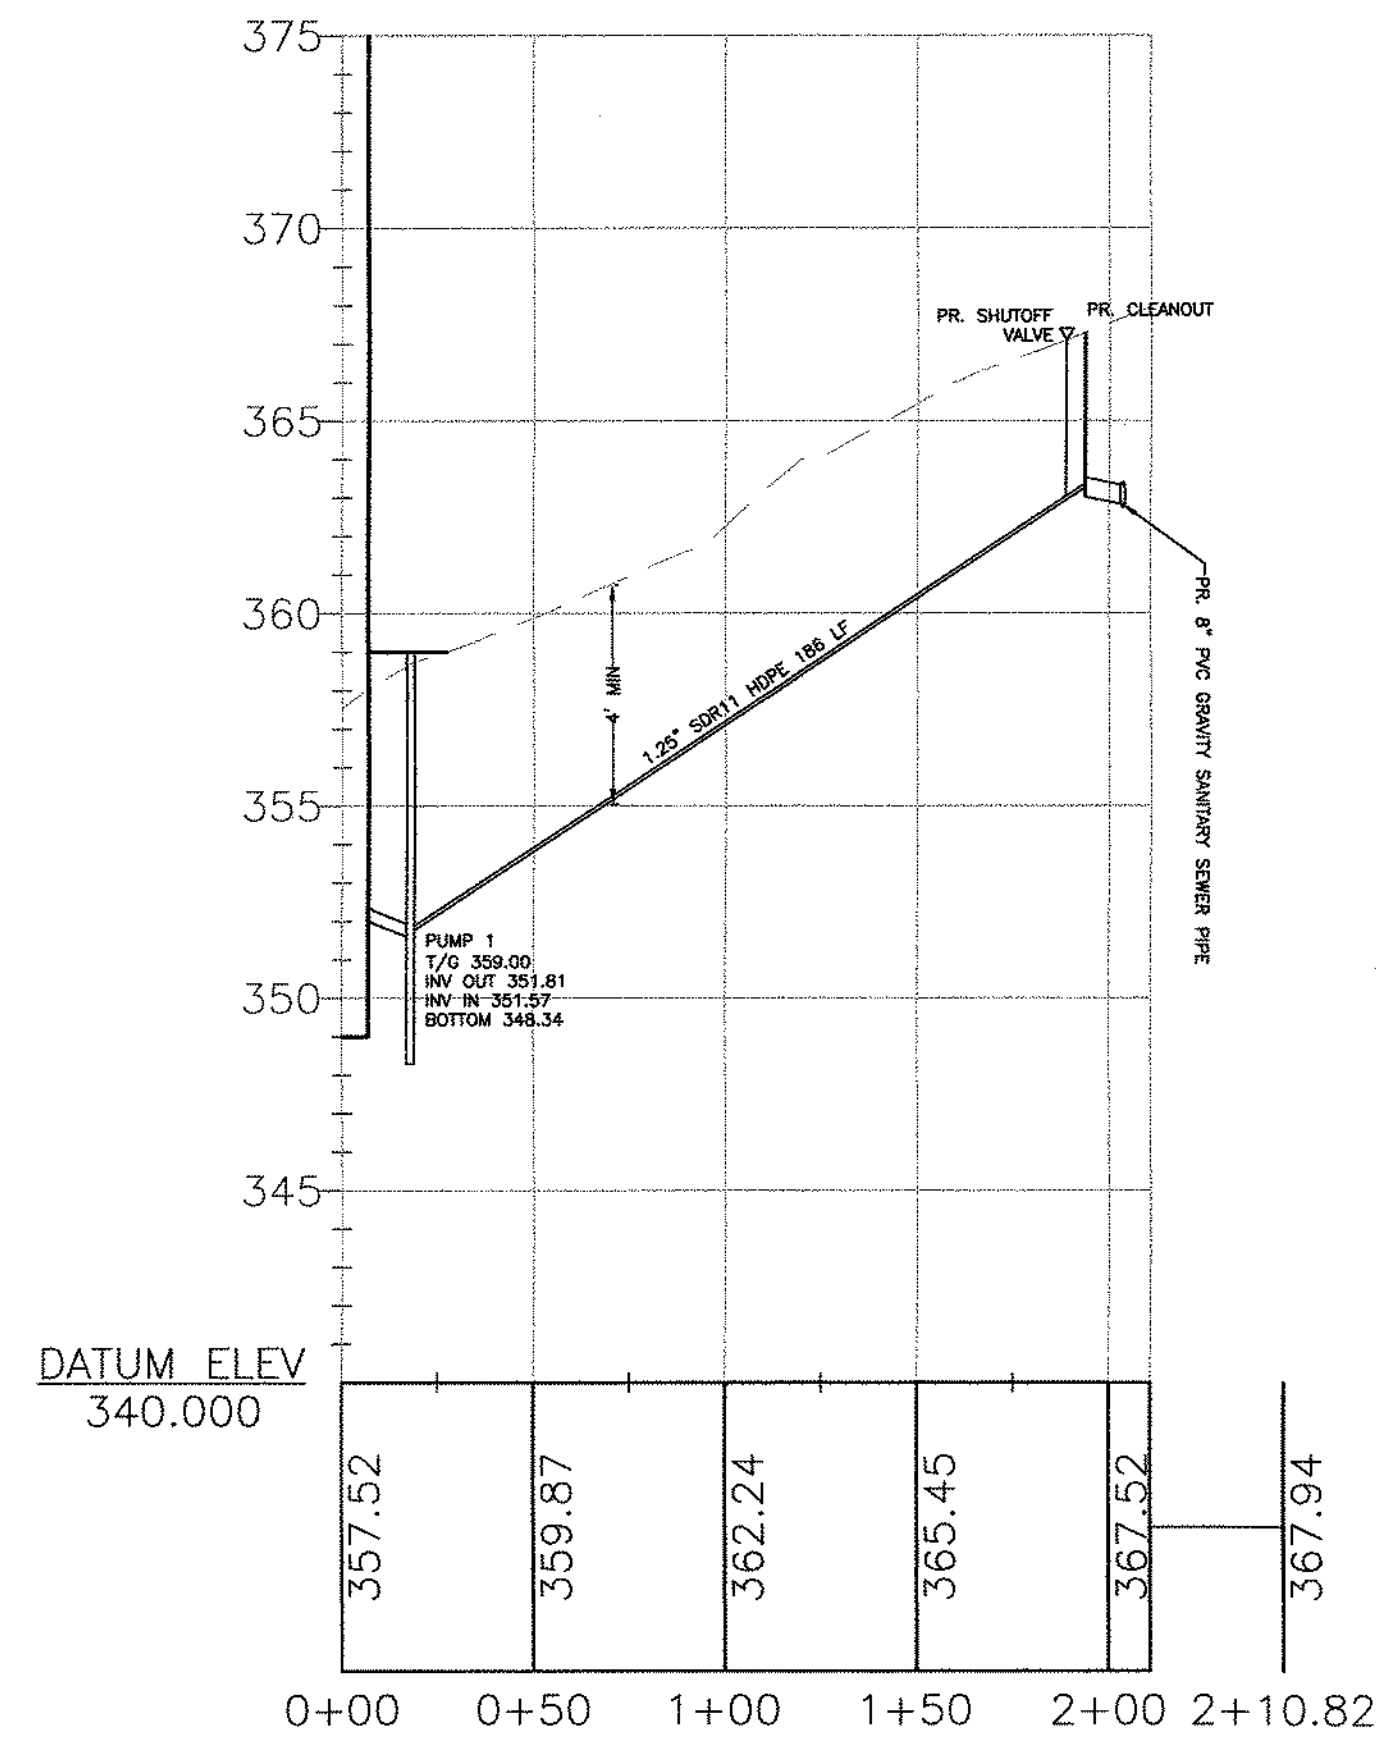


PROFILE: Lot 1 Force Main
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

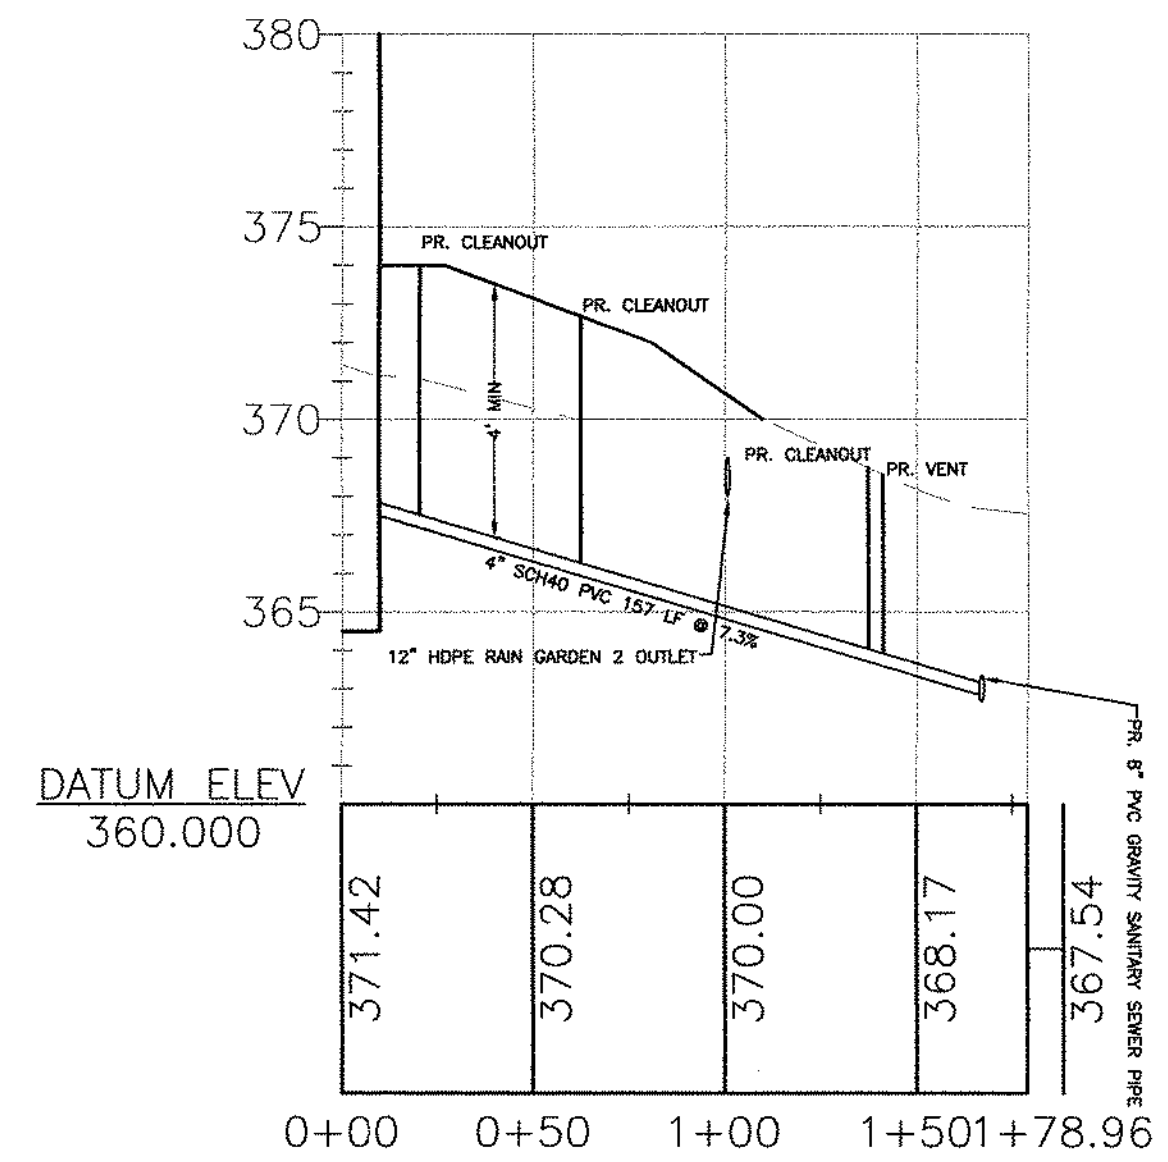


PROFILE: Lot 2 Lateral
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

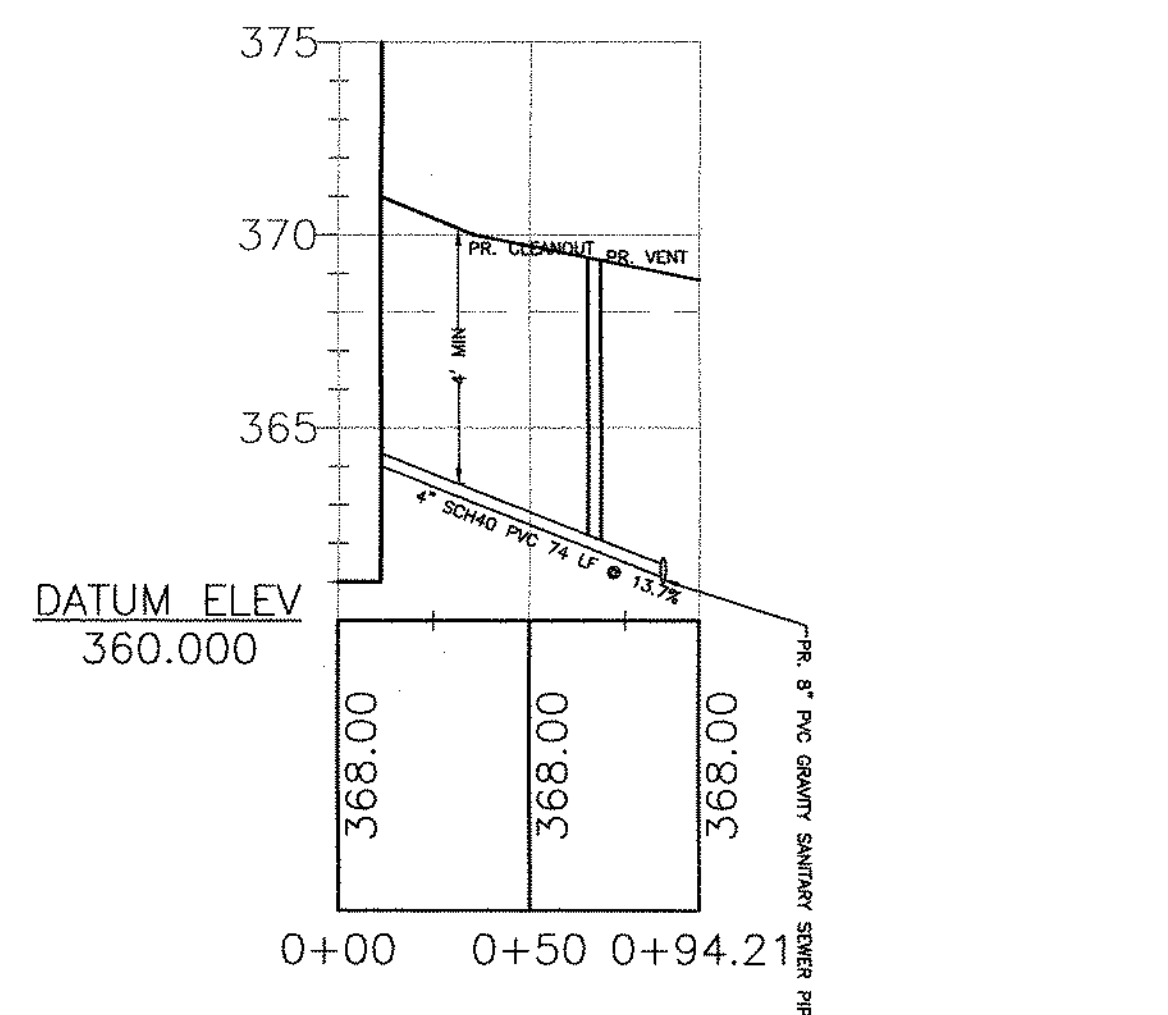




PROFILE: Lot 3 Lateral
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

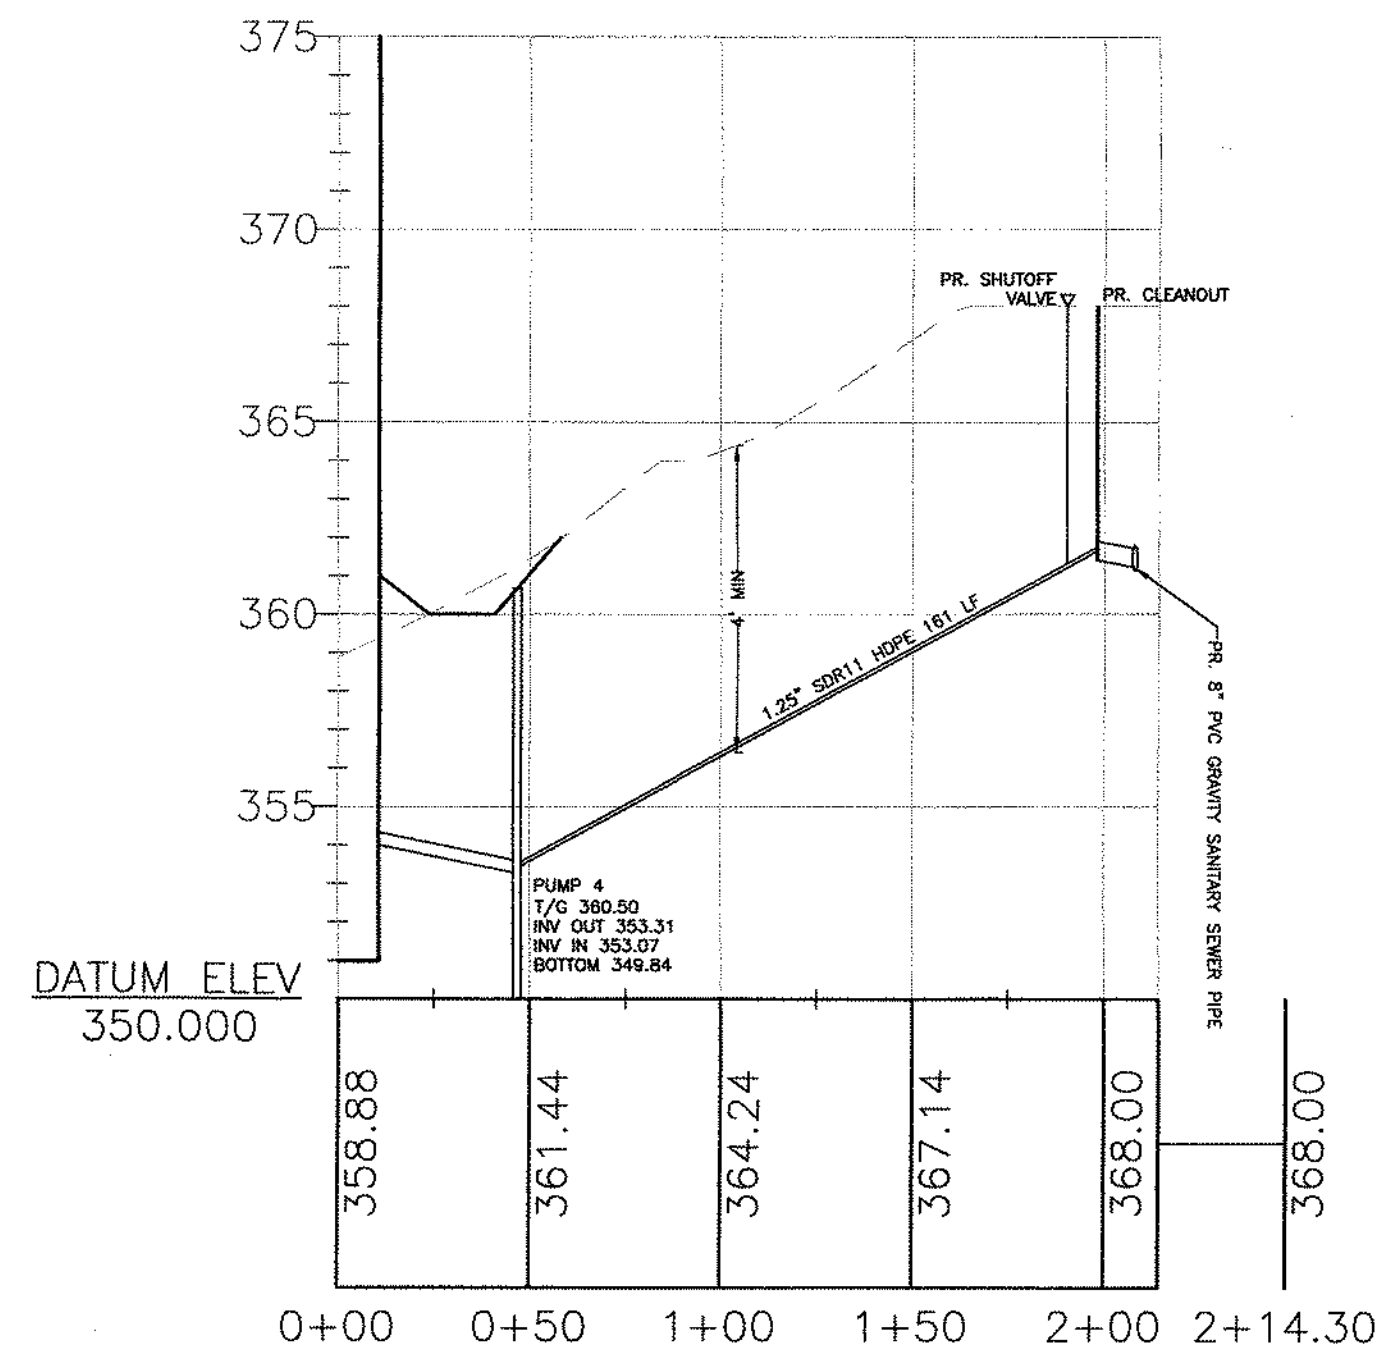

PROFILE: Lot 4 Force Main
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

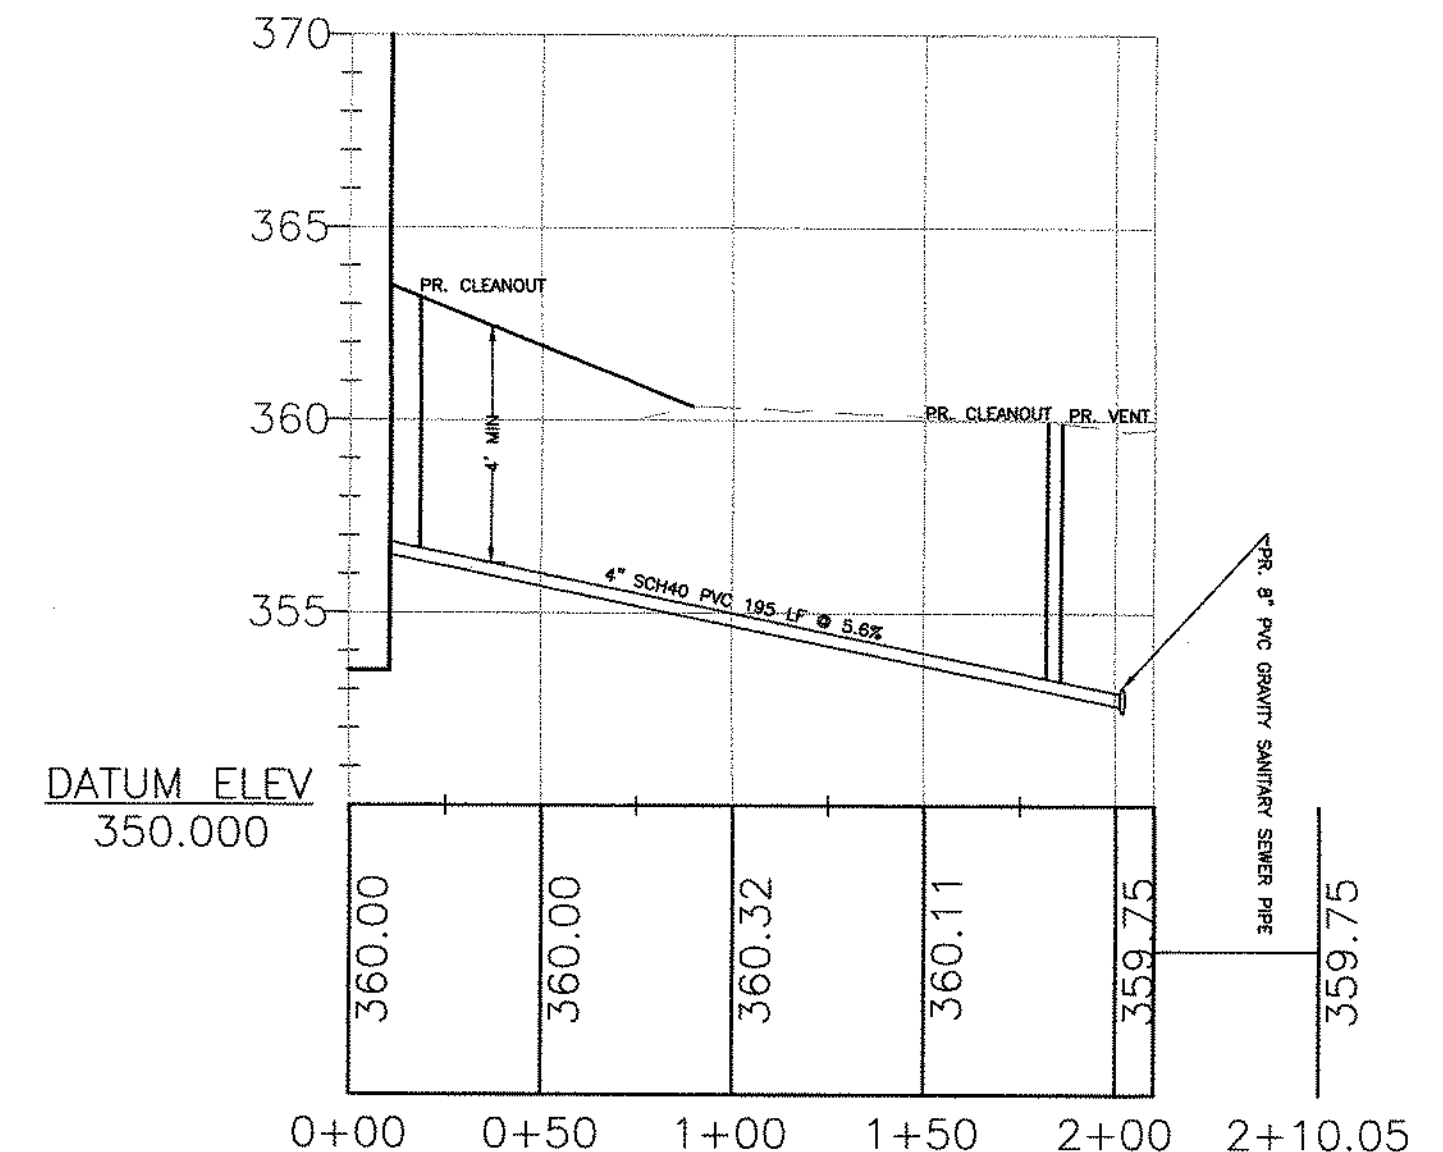


PROFILE: Lot 5 Lateral
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

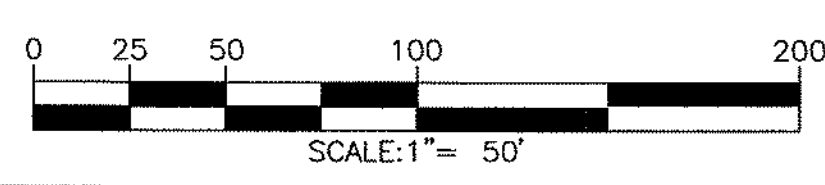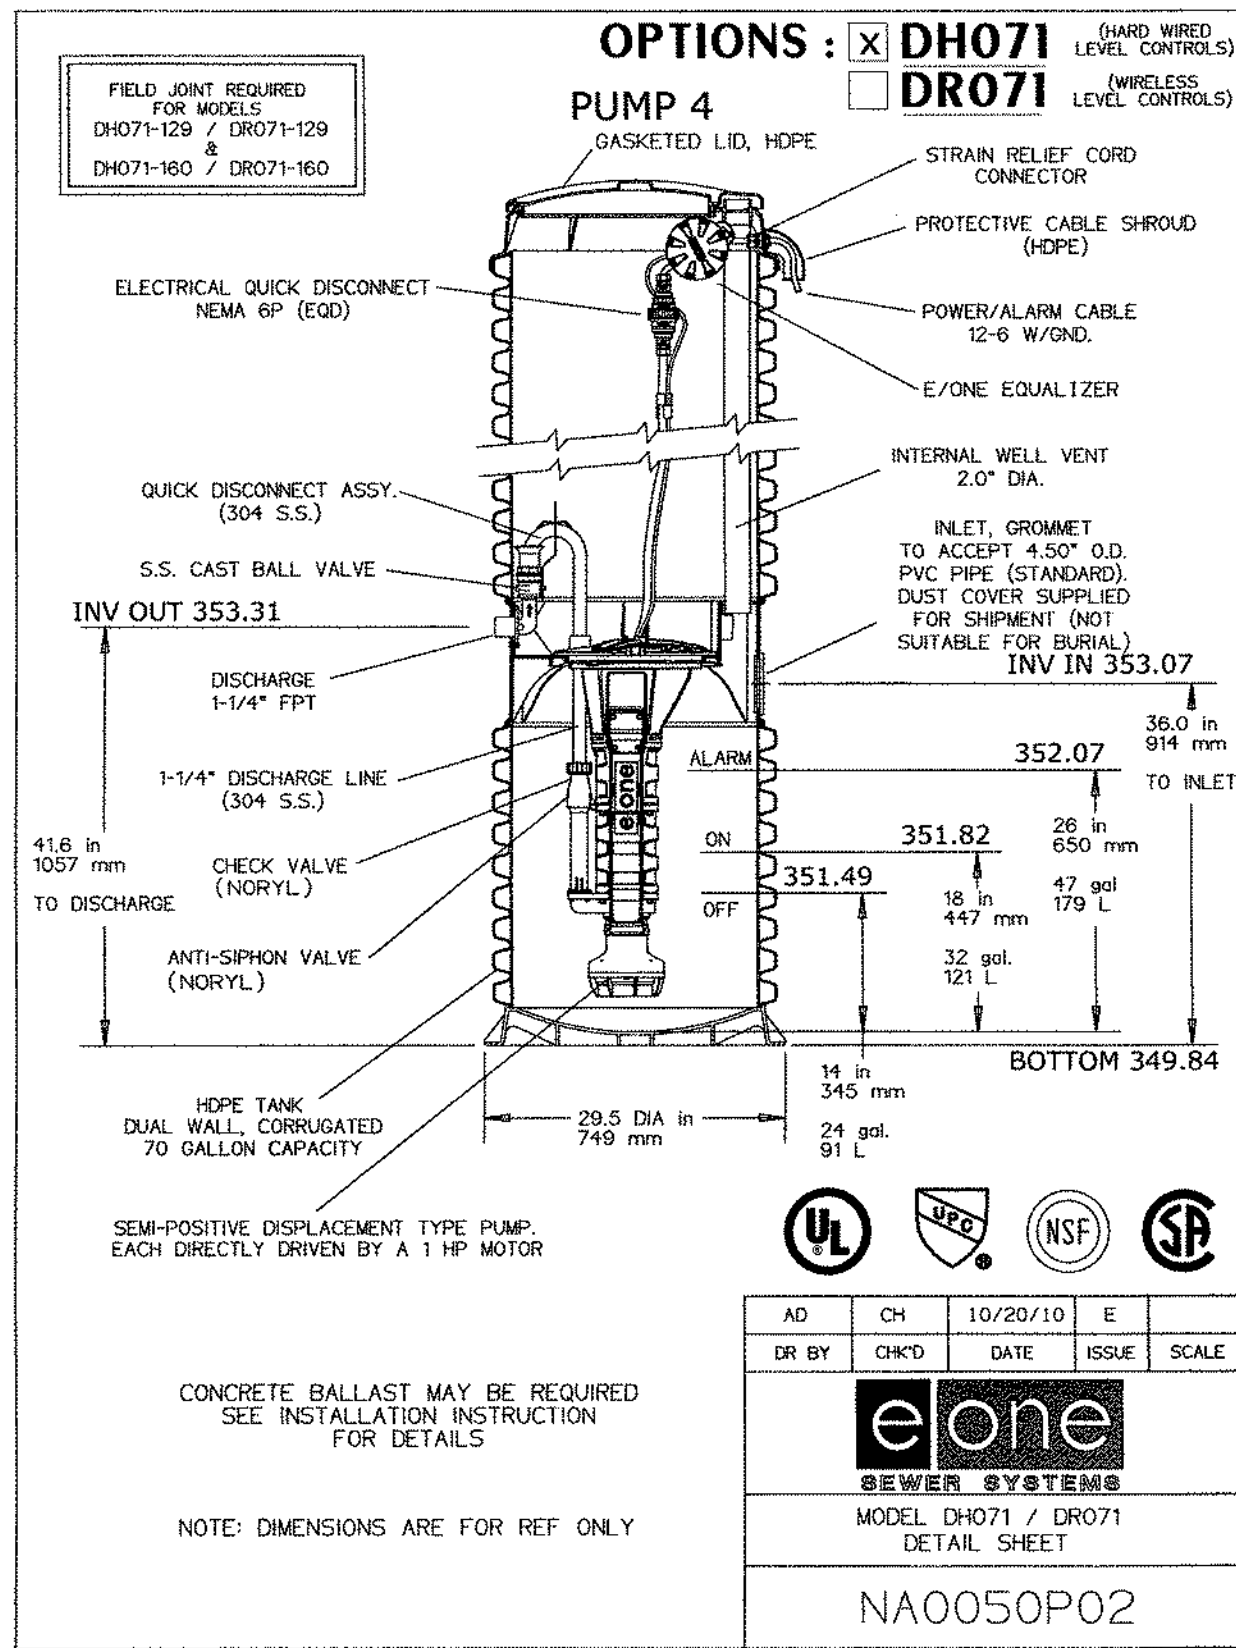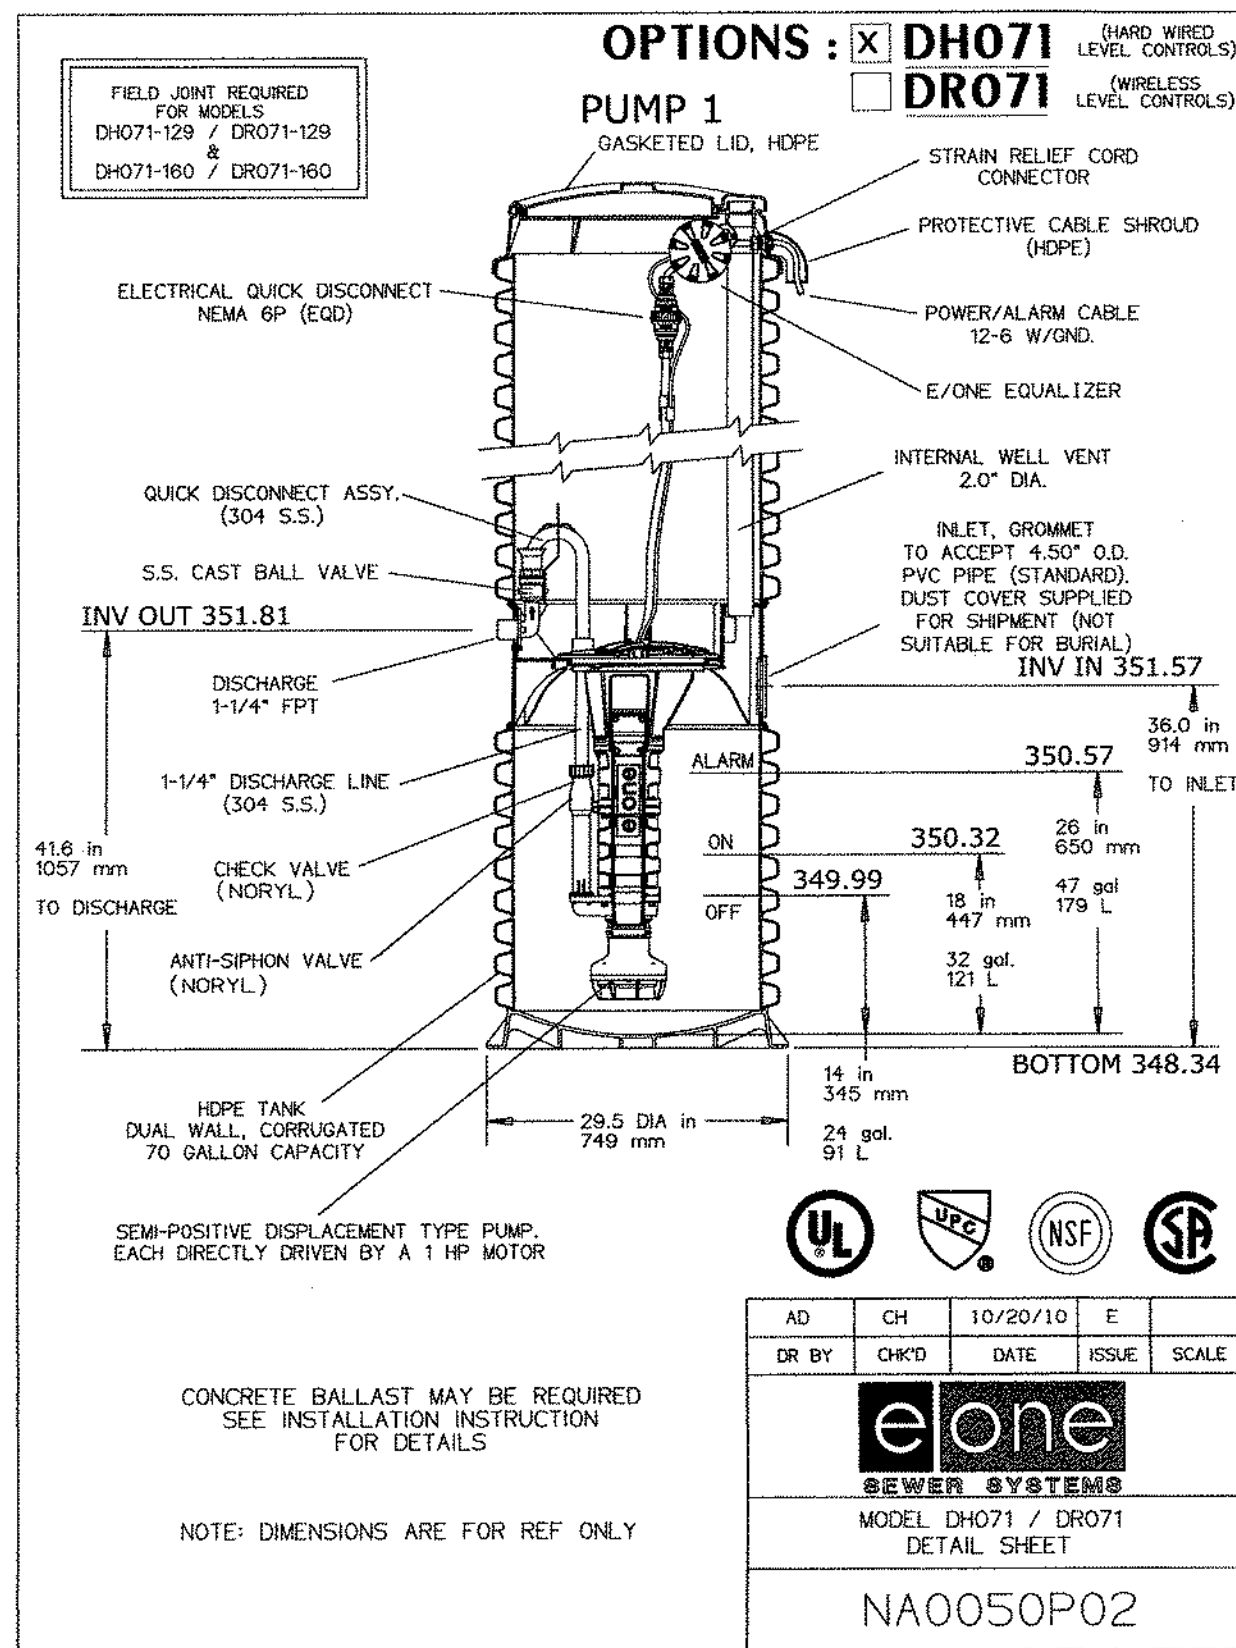


CLIENT R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465		SUBJECT SEWER PROFILE PLAN KELLY ACRES DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA	
SEAL		PROJECT NO. 20-374A	
1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538		DWG. NO. PR120374A	
DESIGN BDB	CHKD. BY BDB	SHEET NO. 5 OF 17	
DRAWN BY WJD	CHKD. BY	DATE 2020-09-04	
DATE 2020-09-04		SCALE 1" = 50'	

NO.	REVISION	DATE	BY	APP.
2	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BDB
1	REVISED PER PENNINO REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BDB


P:\PROJECTS\20-374A_Robles - Kelly Lot\Drawings\120374A.dwg, 08-Feb-22, 1:20:59PM

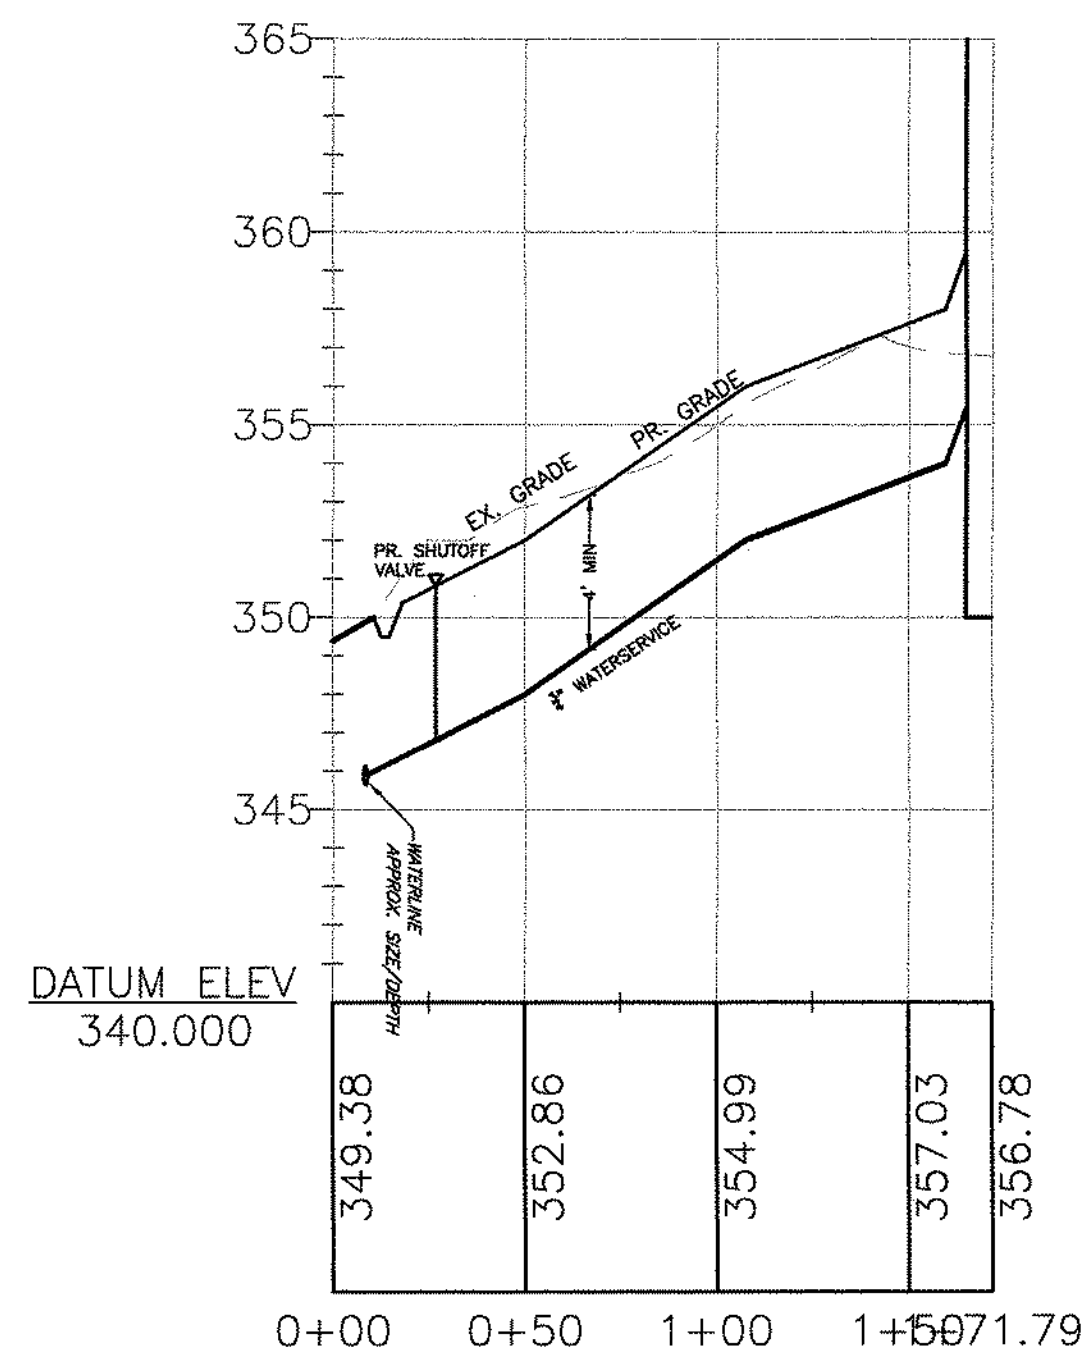


PROFILE: Lot 1 Water Service
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

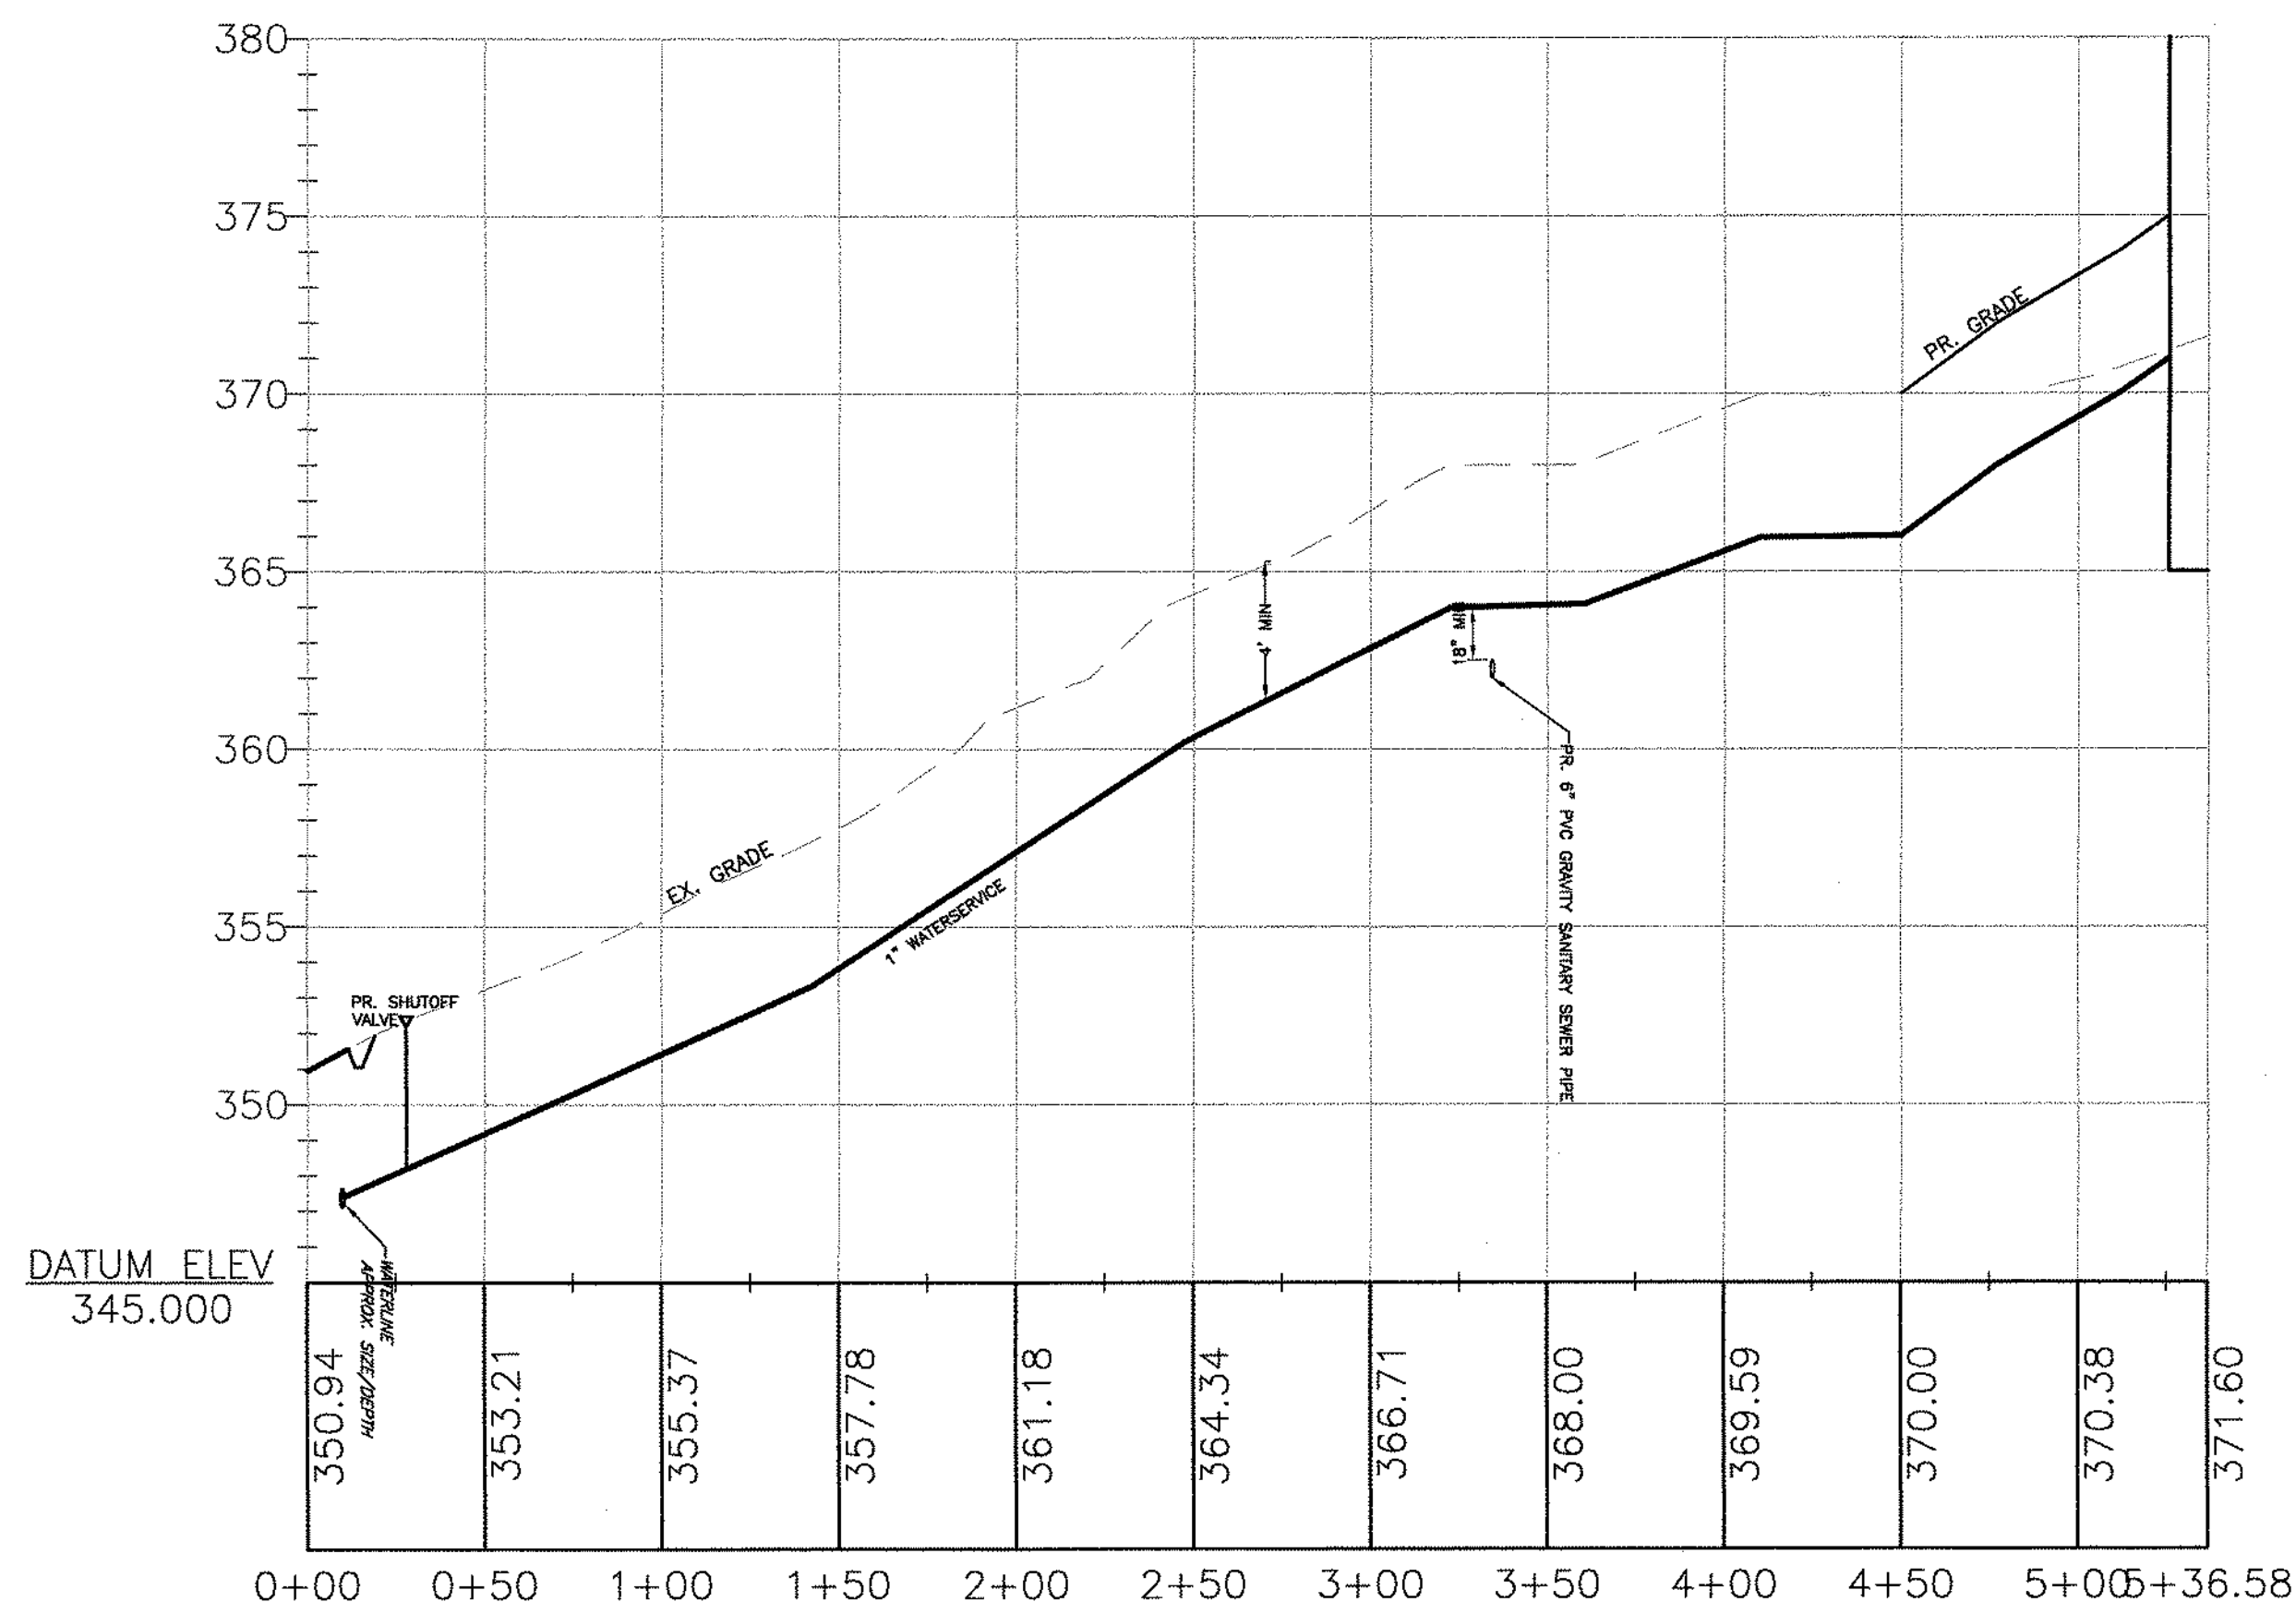


PROFILE: Lot 2 Water Service
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

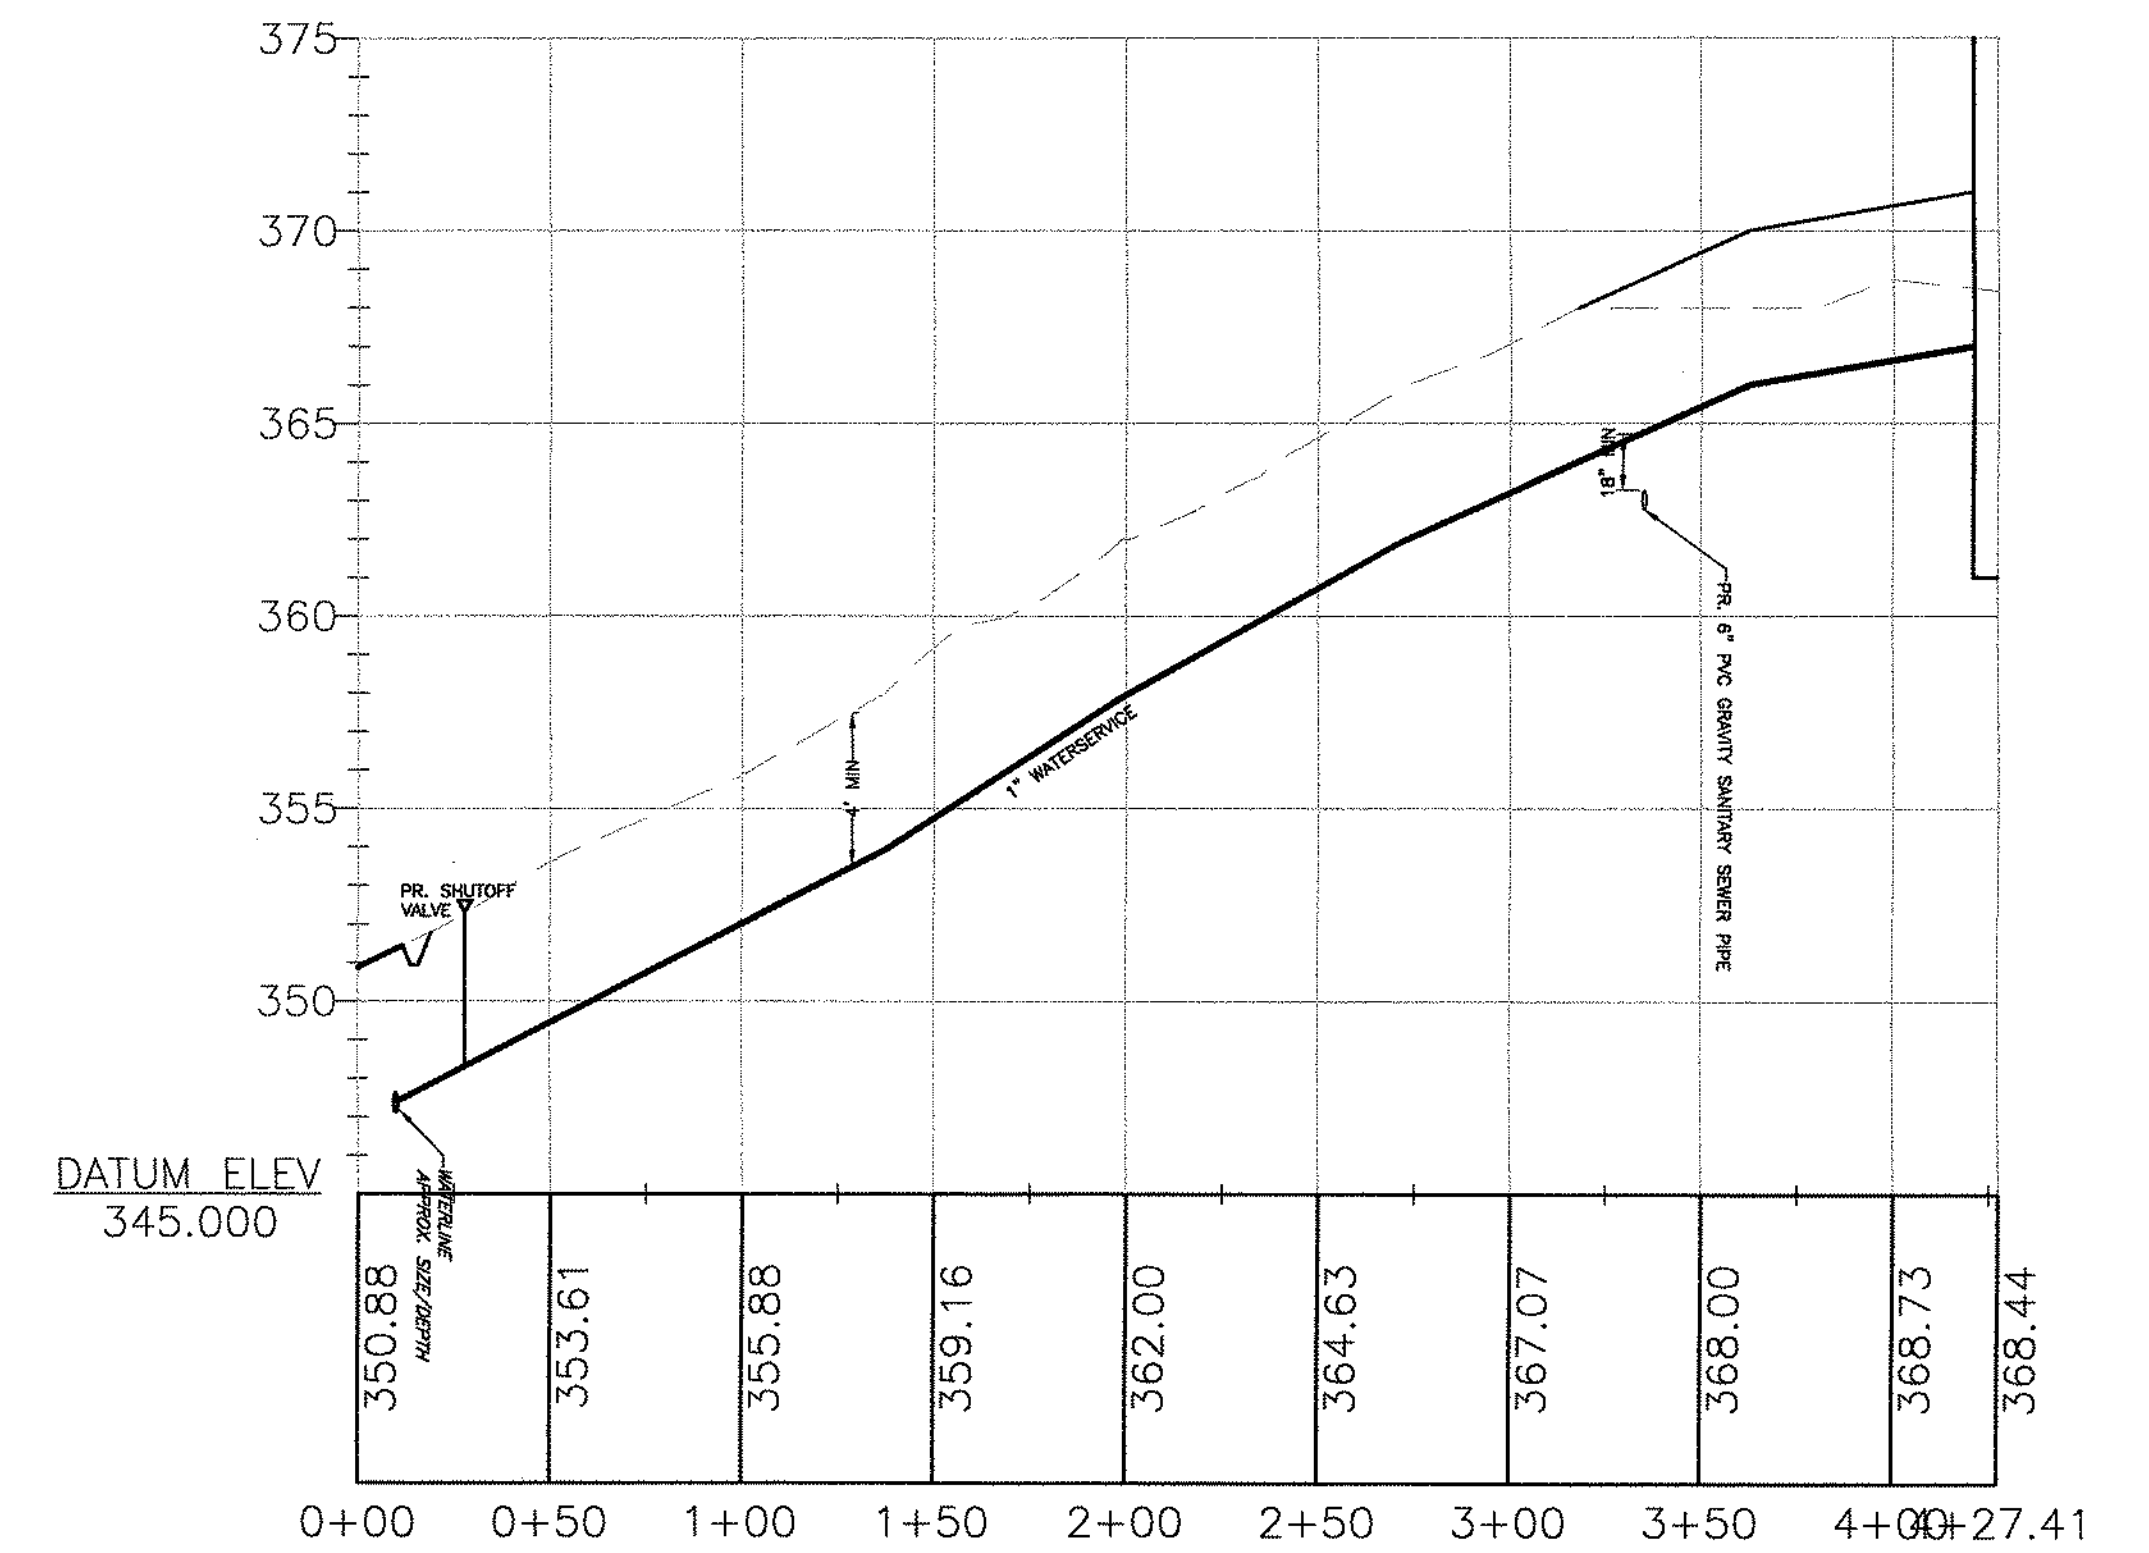


PROFILE: Lot 3 Water Service
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

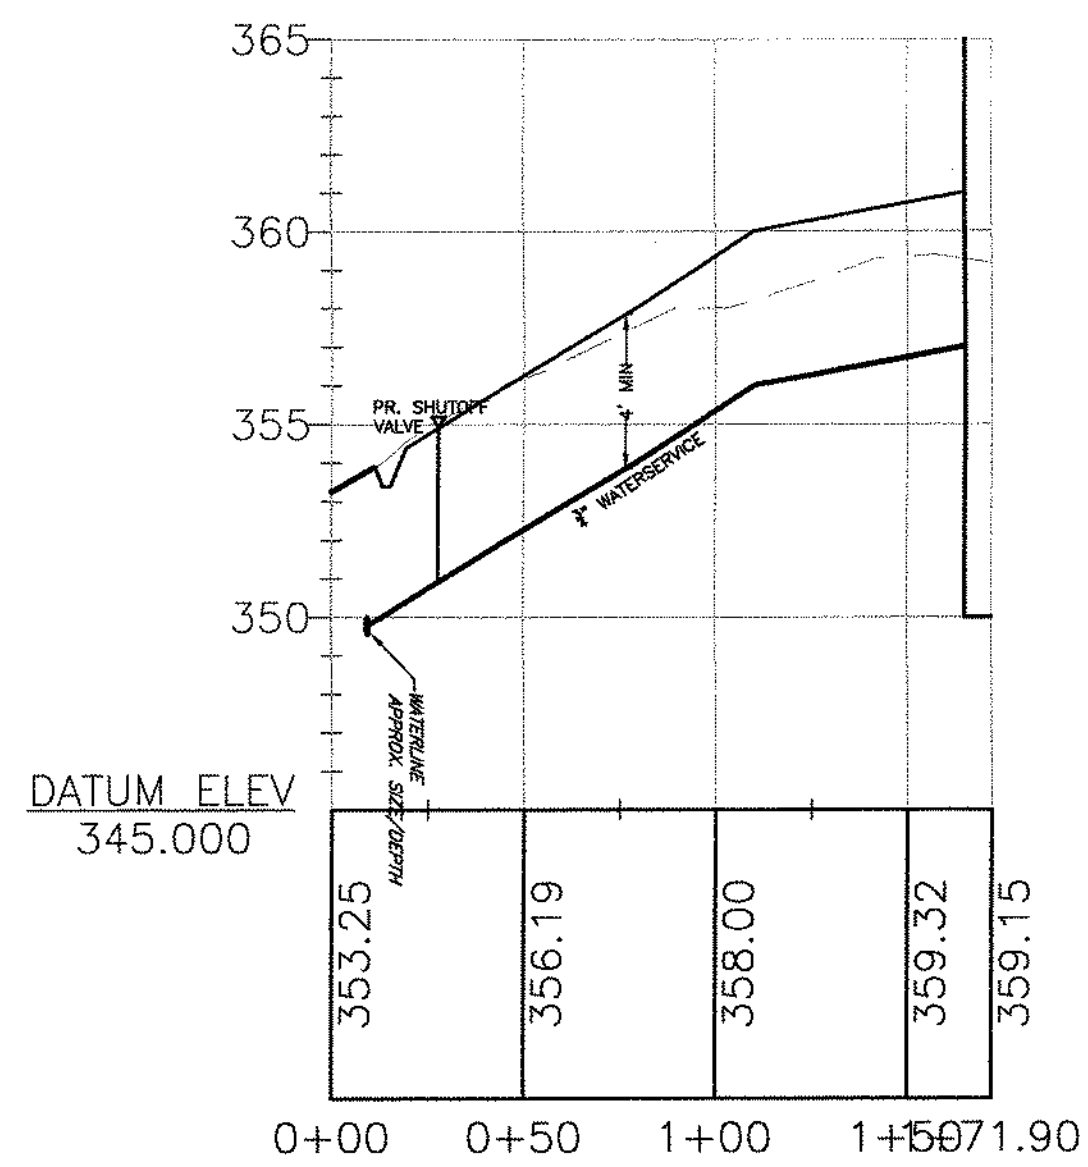


PROFILE: Lot 4 Water Service
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

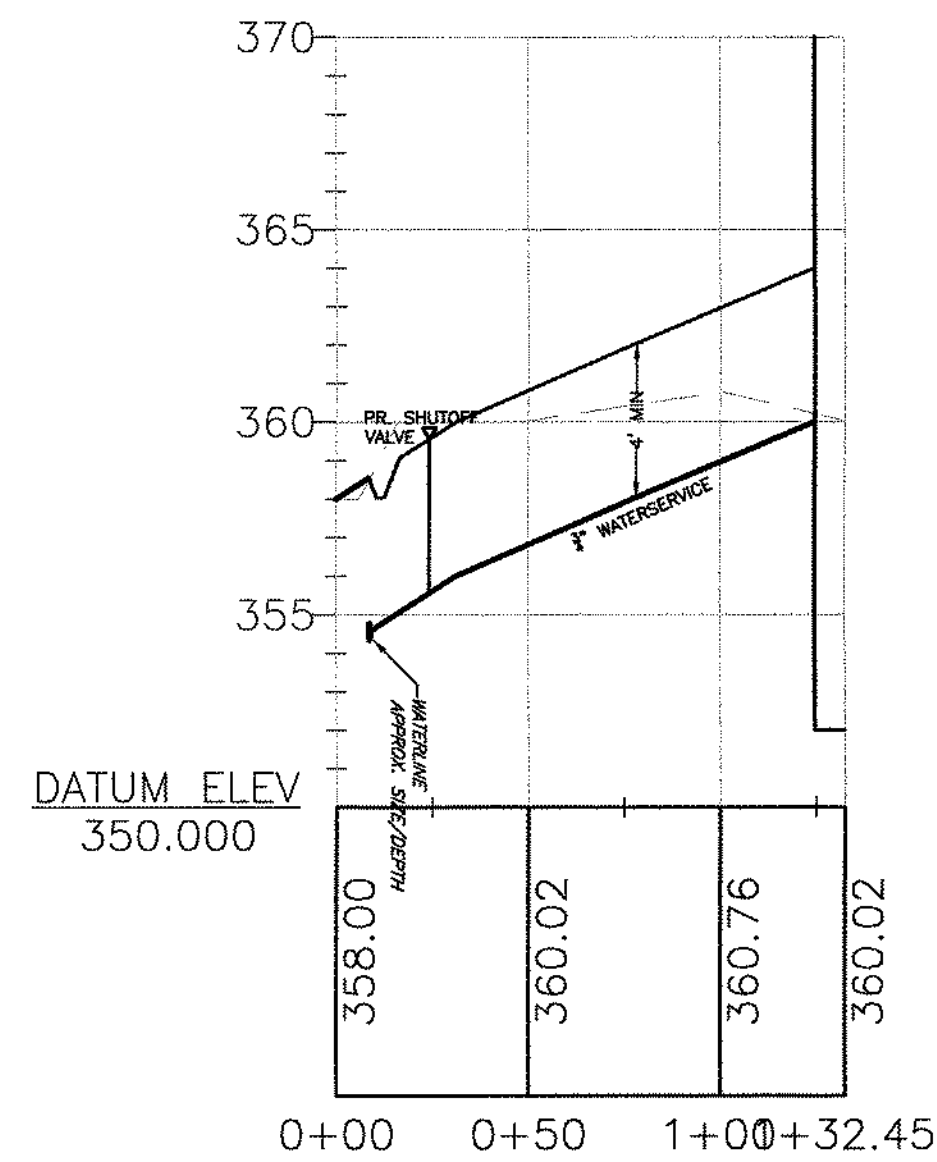

PROFILE: Lot 5 Water Service
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)

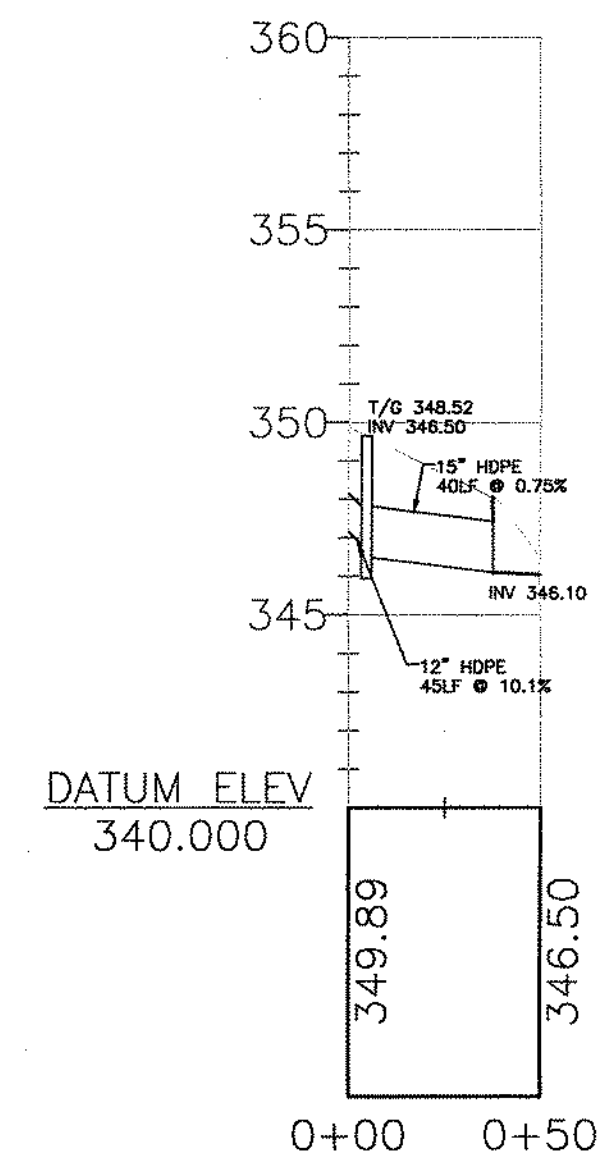



PROFILE: PR. STORM SEWER PIPE
SCALE: 1" = 50' (HORIZ.) 1" = 5' (VERT.)



CLIENT R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465		SUBJECT WATER PROFILE PLAN KELLY ACRES DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA	
SEAL		PROJECT NO. 20-374A	
		DWG. NO. PR220374A	
		SHEET NO. 6 OF 17	
1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538		DESIGN BDB	CHKD. BY BDB
DATE 2020-09-04	SCALE 1" = 50'	DRAWN BY WJD	CHKD. BY
2. REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022 1. REVISED PER PENNING REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOCD REVIEW LETTER DATED OCTOBER 19, 2021		DATE 2022-02-01	BY SSR
NO.	REVISION	DATE	BY

EXISTING TREE SCHEDULE						
TREE#	COMMON NAME(SCIENTIFIC NAME)	DBH/CONDITION	INVASIVE	NATIVE(PA)	TO BE REMOVED	REPLACED
1	LITTLE LEAF LINDEN(TILIA CORDATA)	14	NO	NO	YES	NO
2	LITTLE LEAF LINDEN(TILIA CORDATA)	14	NO	NO	YES	NO
3	LITTLE LEAF LINDEN(TILIA CORDATA)	16	NO	NO	YES	NO
4	LITTLE LEAF LINDEN(TILIA CORDATA)	16	NO	NO	YES	NO
5	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
6	LITTLE LEAF LINDEN(TILIA CORDATA)	14	NO	NO	YES	NO
7	TULIP POPLER(LIRODENDRON TULIPIFERA)	16	NO	YES	YES	YES
8	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
9	LITTLE LEAF LINDEN(TILIA CORDATA)	17	NO	NO	YES	NO
10	LITTLE LEAF LINDEN(TILIA CORDATA)	17	NO	NO	YES	NO
11	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
12	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
13	SILVER MAPLE(ACER SACCHARINUM)	12	NO	YES	YES	YES
14	LITTLE LEAF LINDEN(TILIA CORDATA)	20	NO	NO	YES	NO
15	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
16	LITTLE LEAF LINDEN(TILIA CORDATA)	15	NO	NO	YES	NO
17	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
18	LITTLE LEAF LINDEN(TILIA CORDATA)	15	NO	NO	YES	NO
19	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
20	LITTLE LEAF LINDEN(TILIA CORDATA)	17	NO	NO	YES	NO
21	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
22	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
23	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
24	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
25	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
26	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
27	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
28	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
29	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
30	LITTLE LEAF LINDEN(TILIA CORDATA)	12	NO	NO	YES	NO
31	LITTLE LEAF LINDEN(TILIA CORDATA)	13	NO	NO	YES	NO
32	NORWAY MAPLE (ACER PLATANOIDES)	13	YES	NO	YES	NO
33	SILVER MAPLE(ACER SACCHARINUM)	16	NO	YES	YES	YES
34	SILVER MAPLE(ACER SACCHARINUM)	17	NO	YES	YES	YES
35	SILVER MAPLE(ACER SACCHARINUM)	12X14X12	NO	YES	YES	YES
36	NORWAY MAPLE (ACER PLATANOIDES)	14	YES	NO	YES	NO
37	NORWAY MAPLE (ACER PLATANOIDES)	12	YES	NO	YES	NO
38	NORWAY MAPLE (ACER PLATANOIDES)	14	YES	NO	YES	NO
39	NORWAY MAPLE (ACER PLATANOIDES)	14	YES	NO	YES	NO
40	NORWAY MAPLE (ACER PLATANOIDES)	17	YES	NO	YES	NO
41	NORWAY MAPLE (ACER PLATANOIDES)	12	YES	NO	YES	NO
42	NORWAY MAPLE (ACER PLATANOIDES)	14	YES	NO	YES	NO
43	NORWAY MAPLE (ACER PLATANOIDES)	12	YES	NO	YES	NO
44	SCOTCH PINE(PINUS SYLVESTRIS)	12	NO	NO	NO	YES
45	SCOTCH PINE(PINUS SYLVESTRIS)	13	NO	NO	NO	YES
46	BLACK CHERRY (PRUNUS SEROTINA)	12	NO	NO	NO	YES
47	NORWAY SPRUCE(PICEA ABIES)	16	NO	NO	NO	YES
48	EASTERN WHITE PINE(PINUS STROBUS)	23	NO	NO	NO	YES
49	EASTERN WHITE PINE(PINUS STROBUS)	20	NO	YES	YES	YES*
50	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
51	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES*
52	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
53	EASTERN WHITE PINE(PINUS STROBUS)	13	NO	YES	YES	YES
54	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
55	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
56	EASTERN WHITE PINE(PINUS STROBUS)	17	NO	YES	YES	YES
57	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES
58	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES
59	EASTERN WHITE PINE(PINUS STROBUS)	17	NO	YES	YES	YES
60	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES
61	EASTERN WHITE PINE(PINUS STROBUS)	17	NO	YES	YES	YES
62	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
63	EASTERN WHITE PINE(PINUS STROBUS)	13	NO	YES	YES	YES
64	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
65	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
66	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
67	EASTERN WHITE PINE(PINUS STROBUS)	17	NO	YES	YES	YES
68	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES
69	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES
70	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES
71	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
72	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES*
73	EASTERN WHITE PINE(PINUS STROBUS)	18	NO	YES	YES	YES*
74	EASTERN WHITE PINE(PINUS STROBUS)	16	NO	YES	YES	YES
75	EASTERN WHITE PINE(PINUS STROBUS)	16	NO	YES	YES	YES
76	EASTERN WHITE PINE(PINUS STROBUS)	20	NO	YES	YES	YES*
77	EASTERN WHITE PINE(PINUS STROBUS)	19	NO	YES	YES	YES*
78	EASTERN WHITE PINE(PINUS STROBUS)	20	NO	YES	YES	YES*
79	EASTERN WHITE PINE(PINUS STROBUS)	20	NO	YES	YES	YES*
80	EASTERN WHITE PINE(PINUS STROBUS)	20	NO	YES	YES	YES*
81	EASTERN WHITE PINE(PINUS STROBUS)	19	NO	YES	YES	YES*
82	EASTERN WHITE PINE(PINUS STROBUS)	22	NO	YES	YES	YES*
83	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
84	EASTERN WHITE PINE(PINUS STROBUS)	15	NO	YES	YES	YES
85	EASTERN WHITE PINE(PINUS STROBUS)	19	NO	YES	YES	YES*
86	NORWAY SPRUCE(PICEA ABIES)	13	NO	NO	YES	NO
87	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	16	NO	NO	YES	NO
88	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	12	NO	NO	YES	NO
89	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	12	NO	NO	YES	NO
90	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	12	NO	NO	YES	NO
91	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	12	NO	NO	YES	NO
92	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	12	NO	NO	YES	NO
93	SILVER MAPLE(ACER SACCHARINUM)	16X6X6	NO	YES	YES	YES
94	PIN OAK(QUERCUS PALUSTRIS)	16	NO	YES	YES	YES
95	BLACK CHERRY (PRUNUS SEROTINA)	12X9X9	NO	YES	YES	YES
96	BLACK CHERRY (PRUNUS SEROTINA)	14(DYING)	NO	YES	YES	NO
97	GREEN ASH (FRAXINUM PENNSYLVANICA)	12(DYING)	NO	YES	YES	NO
98	BLACK CHERRY (PRUNUS SEROTINA)	11X13	NO	YES	YES	NO
99	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	12	NO	NO	YES	NO
100	KENTUCKY COFFEETREE(GYMNOCCLUS DIODICUS)	13	NO	NO	YES	NO
101	SILVER MAPLE(ACER SACCHARINUM)	12X10X13	NO	YES	YES	YES
102	EASTERN BLACK WALNUT(JUGLANS NIGRA)	12	NO	YES	YES	YES
103	EASTERN BLACK WALNUT(JUGLANS NIGRA)	11	NO	YES	YES	NO
104	SCOTCH PINE(PINUS SYLVESTRIS)	14	NO	NO	YES	NO
105	LITTLE LEAF LINDEN(TILIA CORDATA)	11	NO	NO	YES	NO
106	EASTERN WHITE PINE(PINUS STROBUS)	16	NO	YES	YES	YES
107	EASTERN WHITE PINE(PINUS STROBUS)	16	NO	YES	YES	YES
108	EASTERN WHITE PINE(PINUS STROBUS)	12	NO	YES	YES	YES
109	EASTERN WHITE PINE(PINUS STROBUS)	16	NO	YES	YES	YES
110	EASTERN WHITE PINE(PINUS STROBUS)	19	NO	YES	YES	YES
111	NORWAY SPRUCE(PICEA ABIES)	13	NO	YES	YES	YES
112	EASTERN WHITE PINE(PINUS STROBUS)	13	NO	YES	YES	YES
113	EASTERN WHITE PINE(PINUS STROBUS)	13	NO	YES	YES	YES
114	EASTERN WHITE PINE(PINUS STROBUS)	13	NO	YES	YES	YES
115	EASTERN WHITE PINE(PINUS STROBUS)	13	NO	YES	YES	YES

OMMITTED TREE NUMBERS REPRESENT TREES LESS THAN 12" IN DIAMETER AND ARE NOT SHOWN.
*TREES REPLACED AT A 2:1 RATIO.

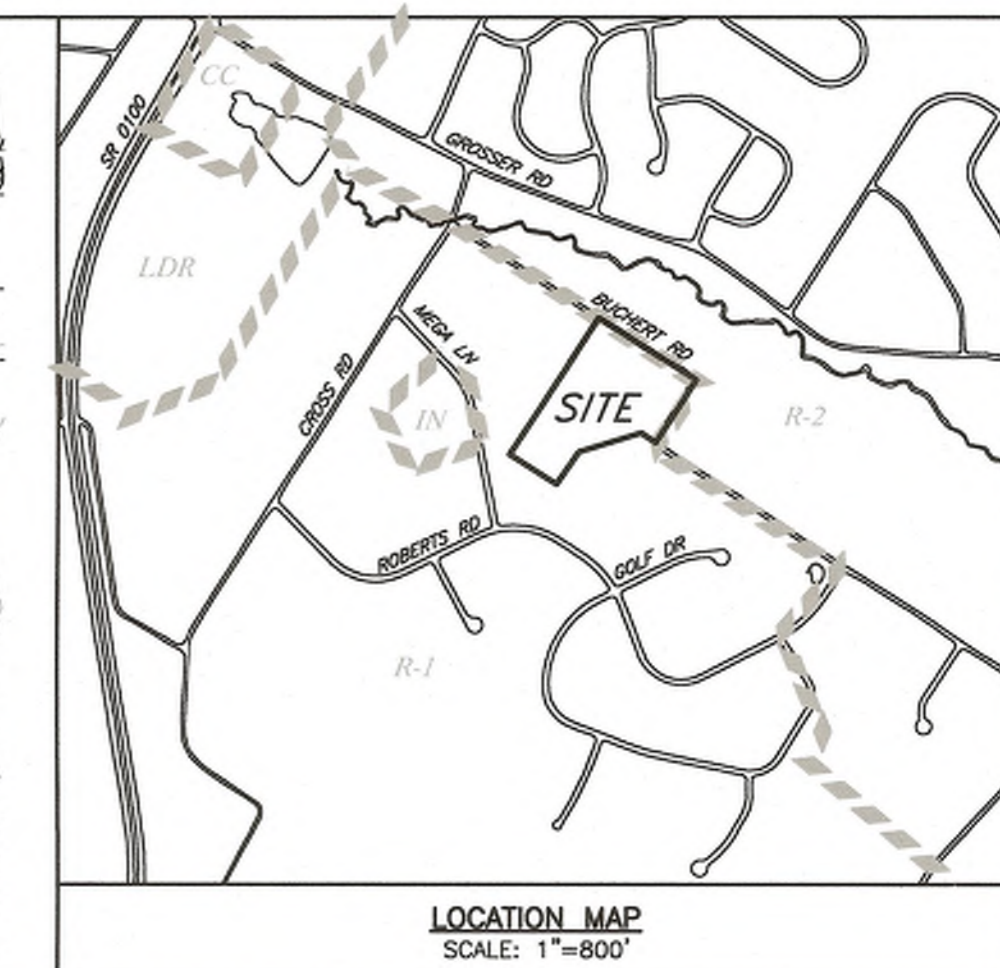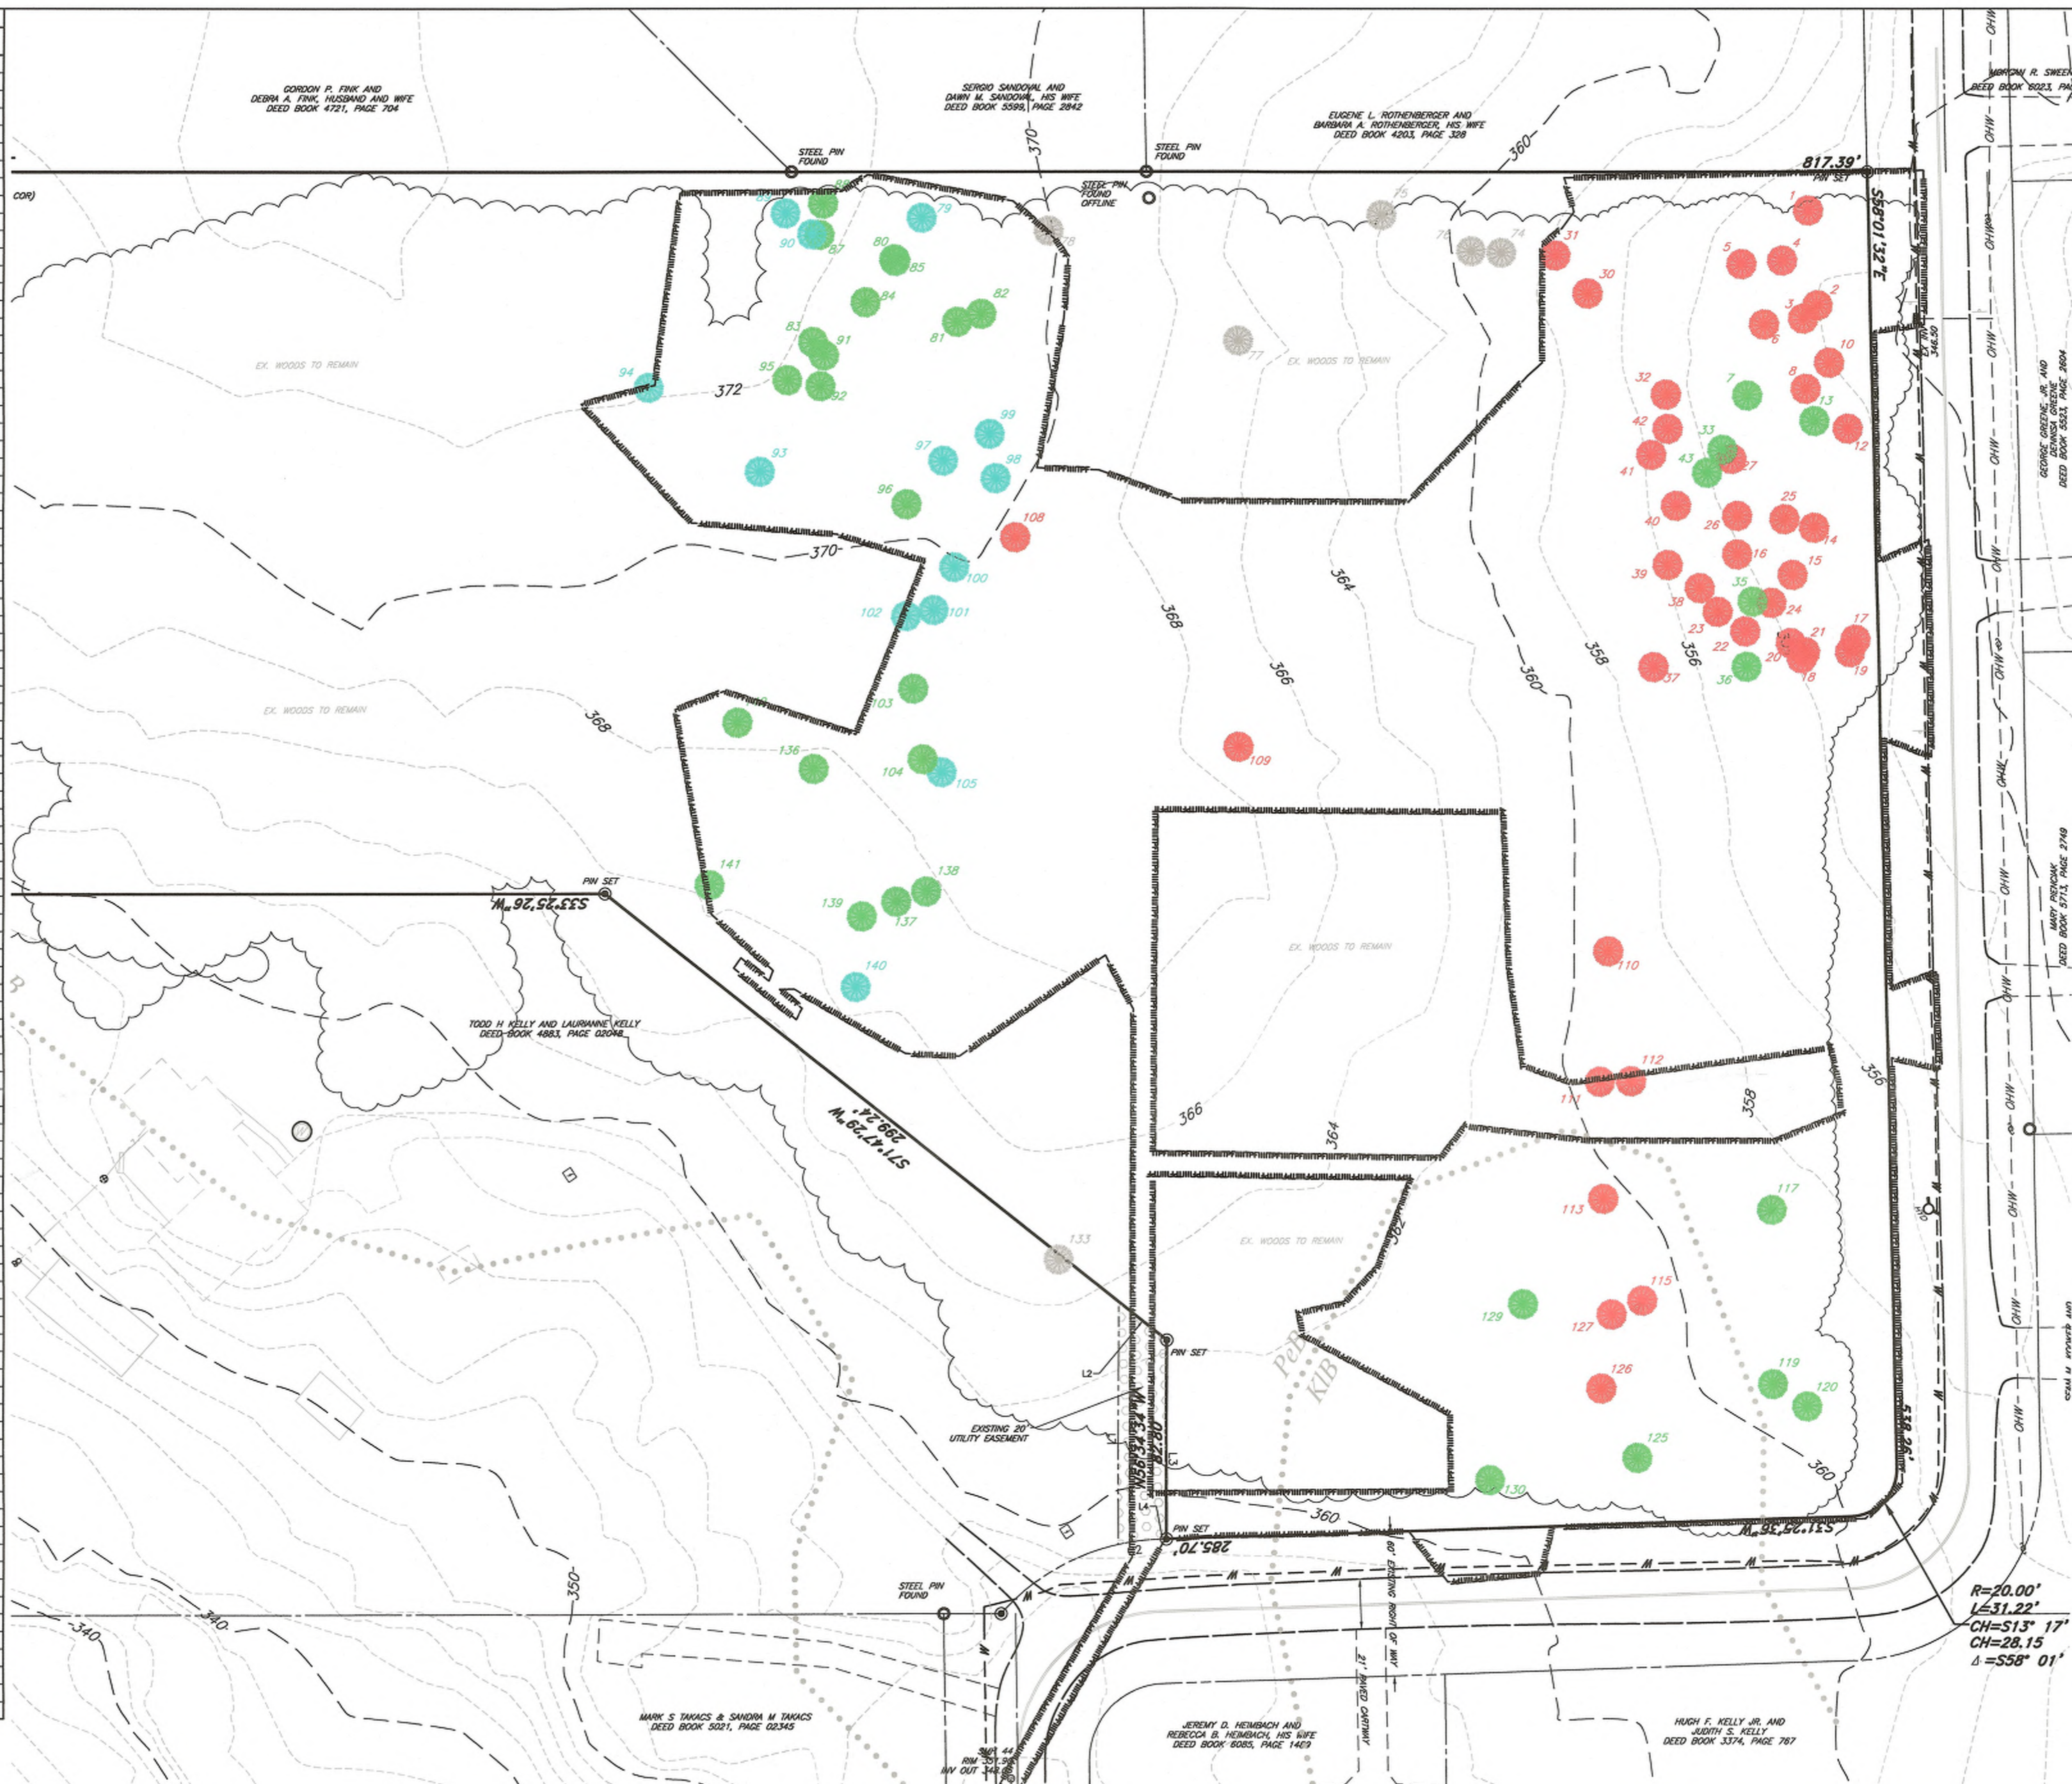



LEGEND

- EX. TRACT LINE
- EX. BOUNDARY
- EX. RIGHT-OF-WAY
- SETBACKS
- EX. SANITARY
- EX. WATER
- EX. MONUMENTATION
- EX. UTILITY POLE & GUY WIRE
- EX. OVERHEAD WIRES
- EX. SANITARY MANHOLE
- EXISTING TREELINE
- EX. SOILS
- EX. EASEMENT
- EX. CONTOURS
- EX. WELL
- EX. TRANSFORMER
- EX. TREE TO REMAIN >12"
- EX. NATIVE TREE TO REPLACE (12"-18")
- EX. NATIVE TREE TO REPLACE (18"+)
- EX. TREE TO REMOVE >12"



CLIENT		SUBJECT	
R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465		EXISTING FEATURES/ENVIRONMENTAL RESOURCES PLAN	
		KELLY ACRES	
		DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA	
SEAL		PROJECT NO. 20-374A	
		DWC NO. EX120374A	
		SHEET NO. 7 OF 17	
2. REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022 1. REVISED PER PENNON REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCCD REVIEW LETTER DATED OCTOBER 19, 2021		DESIGN BDB CHKD. BY BDB DRAWN BY WJD CHKD. BY DATE 2020-09-04 SCALE 1"=40'	
NO.		DATE BY APP.	


P:\PROJECTS\20-374A_Route - Kelly LA\Eng\PT120374A.dwg, 08-Feb-22, 12:03:13

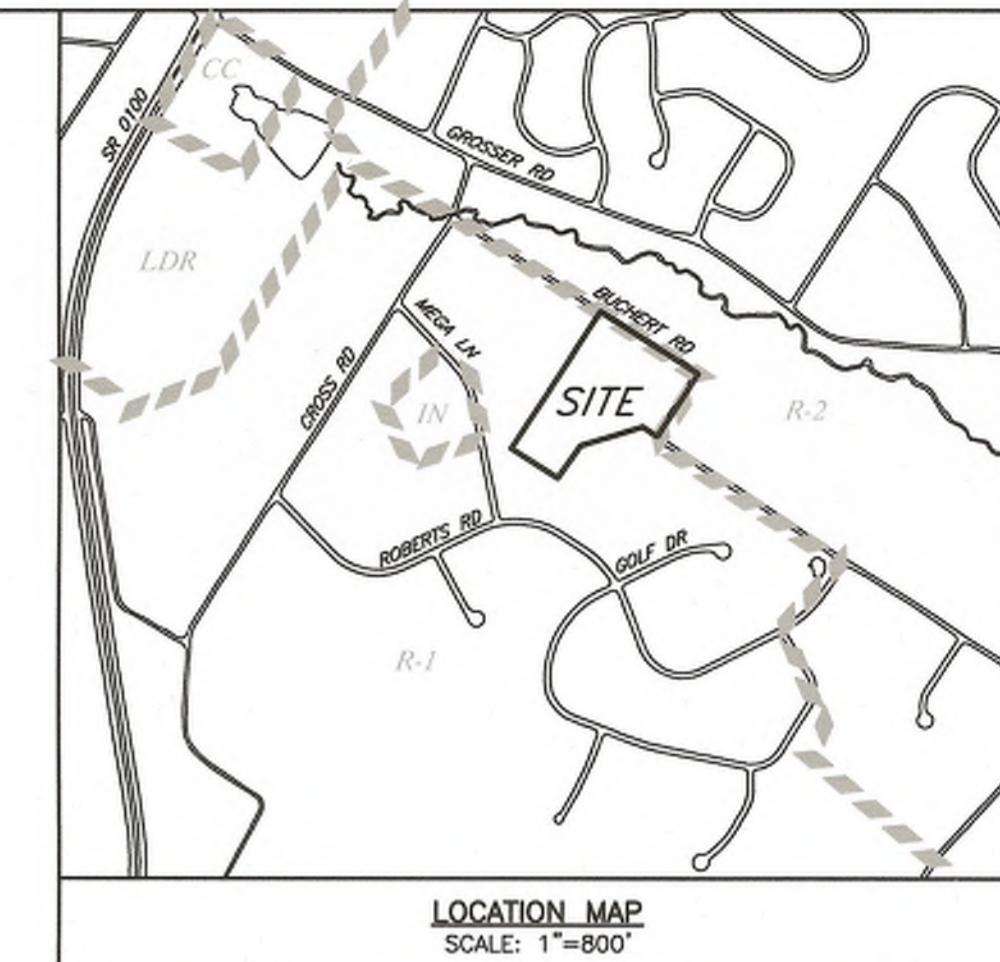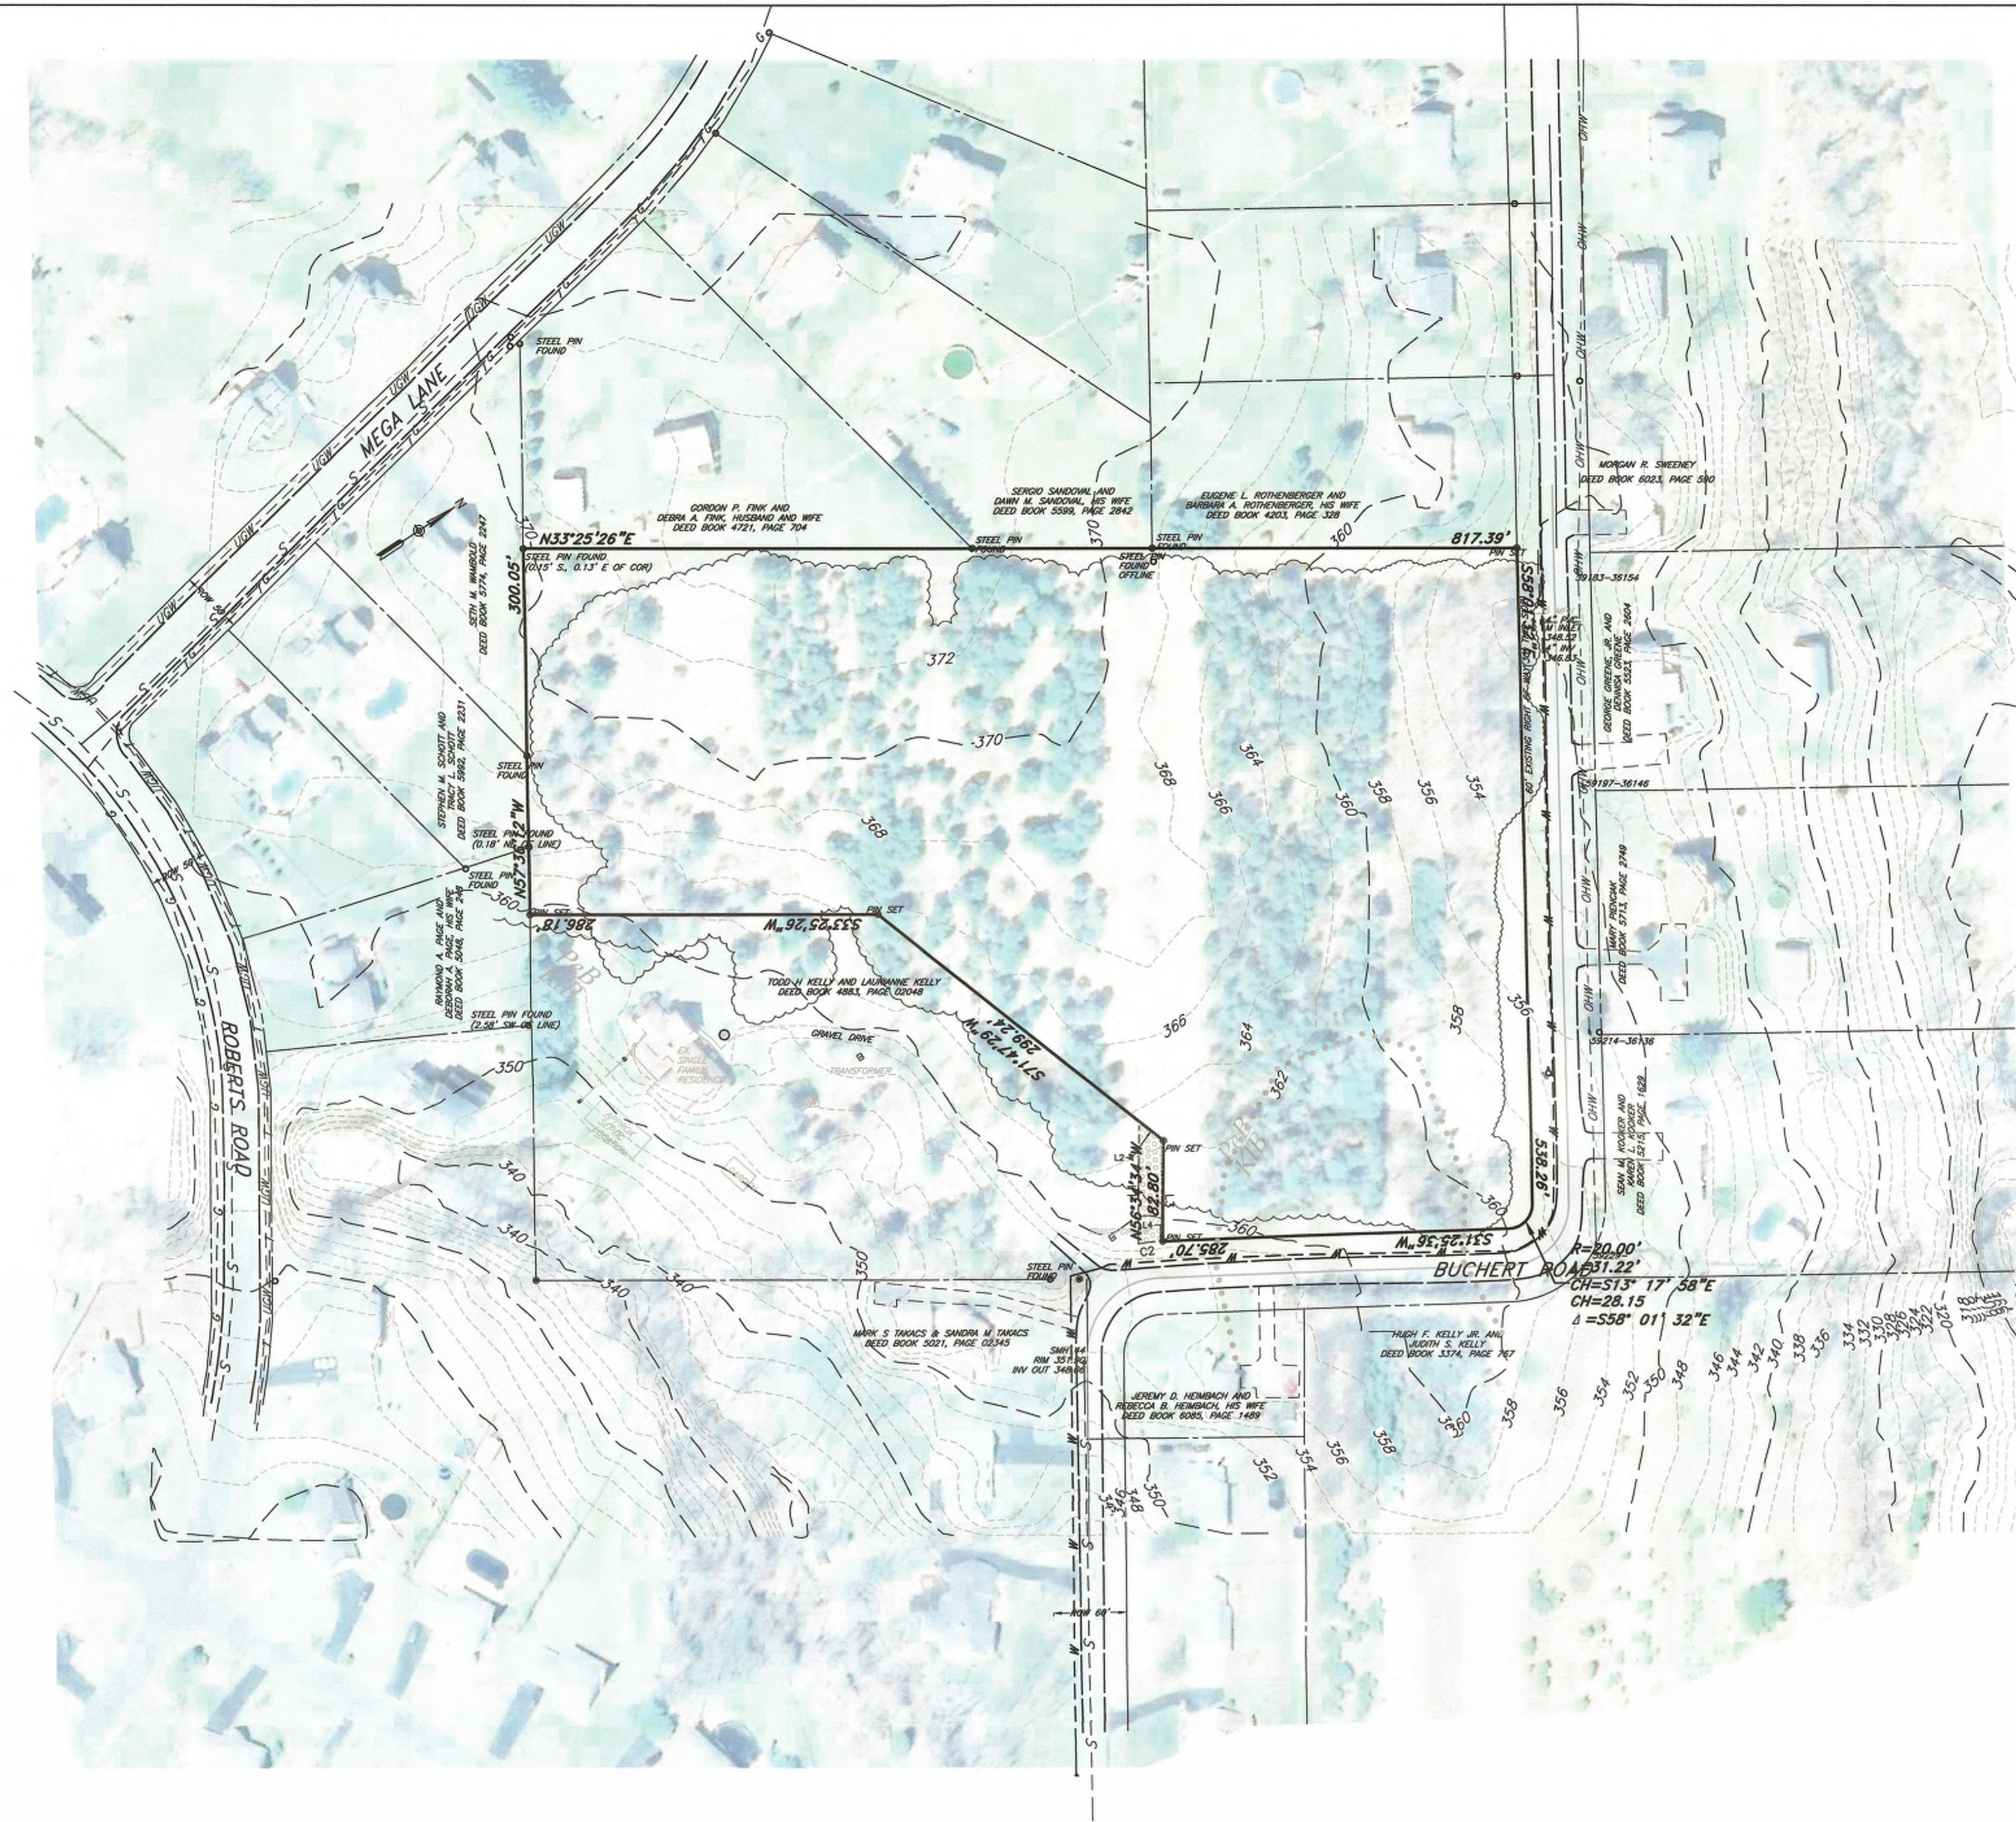

LEGEND



EX. TRACT LINE	---
EX. BOUNDARY	---
EX. RIGHT-OF-WAY	---
SETBACKS	---
EX. SANITARY	---
EX. WATER	---
EX. MONUMENTATION	⊙
EX. UTILITY POLE & GUY WIRE	⊙
EX. OVERHEAD WIRES	--- OHW ---
EX. SANITARY MANHOLE	⊙
EXISTING TREELINE	---
EX. SOILS	Gc PeB
STEEL PIN (5/8" DIA., 24" LONG)	⊙
EX. EASEMENT	⊞
EX. CONTOURS	230 229
EX. WELL	⊙
EX. TRANSFORMER	⊞



CLIENT R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465		SUBJECT EXISTING FEATURES/ENVIRONMENTAL RESOURCES PLAN AERIAL PLAN KELLY ACRES DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA	
SEAL		PROJECT NO. 20-374A	
		DWC NO. EX120374A	
		SHEET NO. 8 OF 17	
1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538		DESIGN BDB	CHKD. BY BDB
DATE 2020-09-04		DRAWN BY WJD	CHKD. BY BDB
SCALE 1"=40'		DATE 2022-02-01	

NO.	REVISION	DATE	BY	APP.
2.	REVISED PER SDR REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BDB
1.	REVISED PER PENNON REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BDB


P:\PROJECTS\20-374A_Roberts - Kelly Acres\VP120374A.dwg, 08-Feb-22 12:03:18

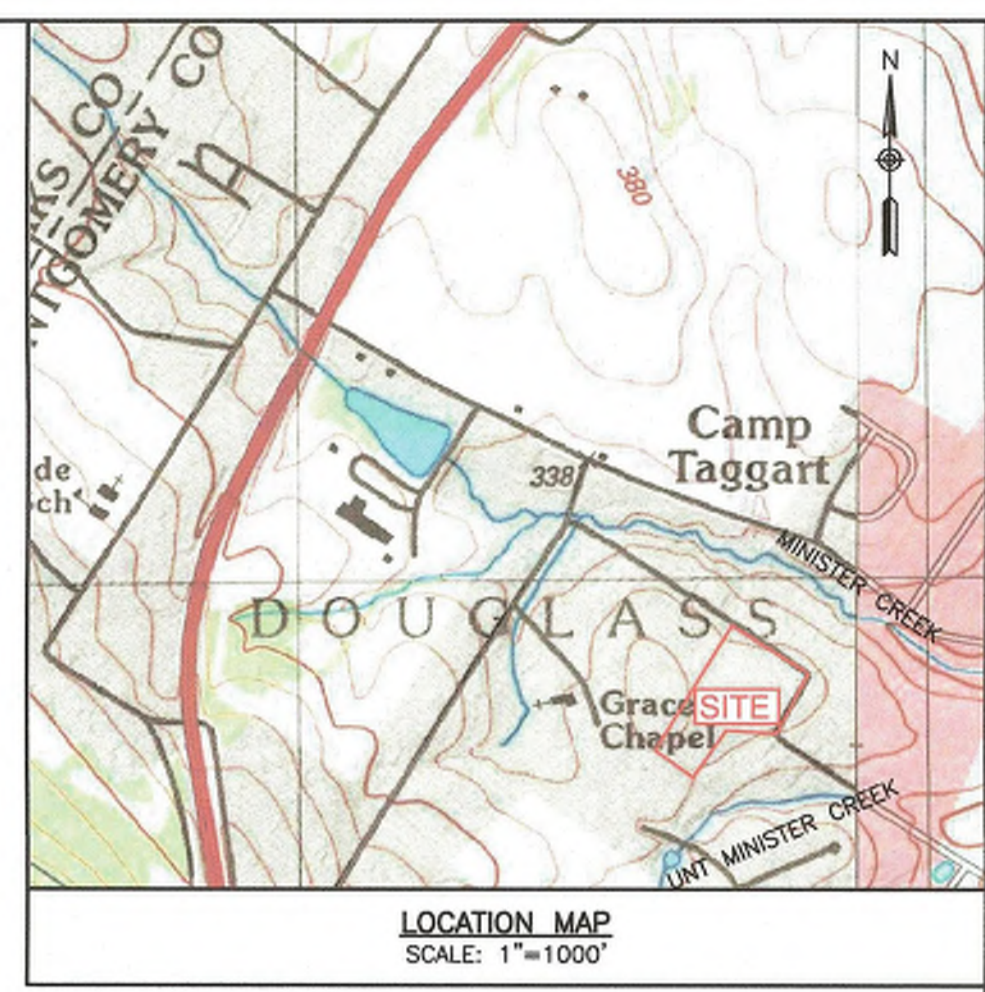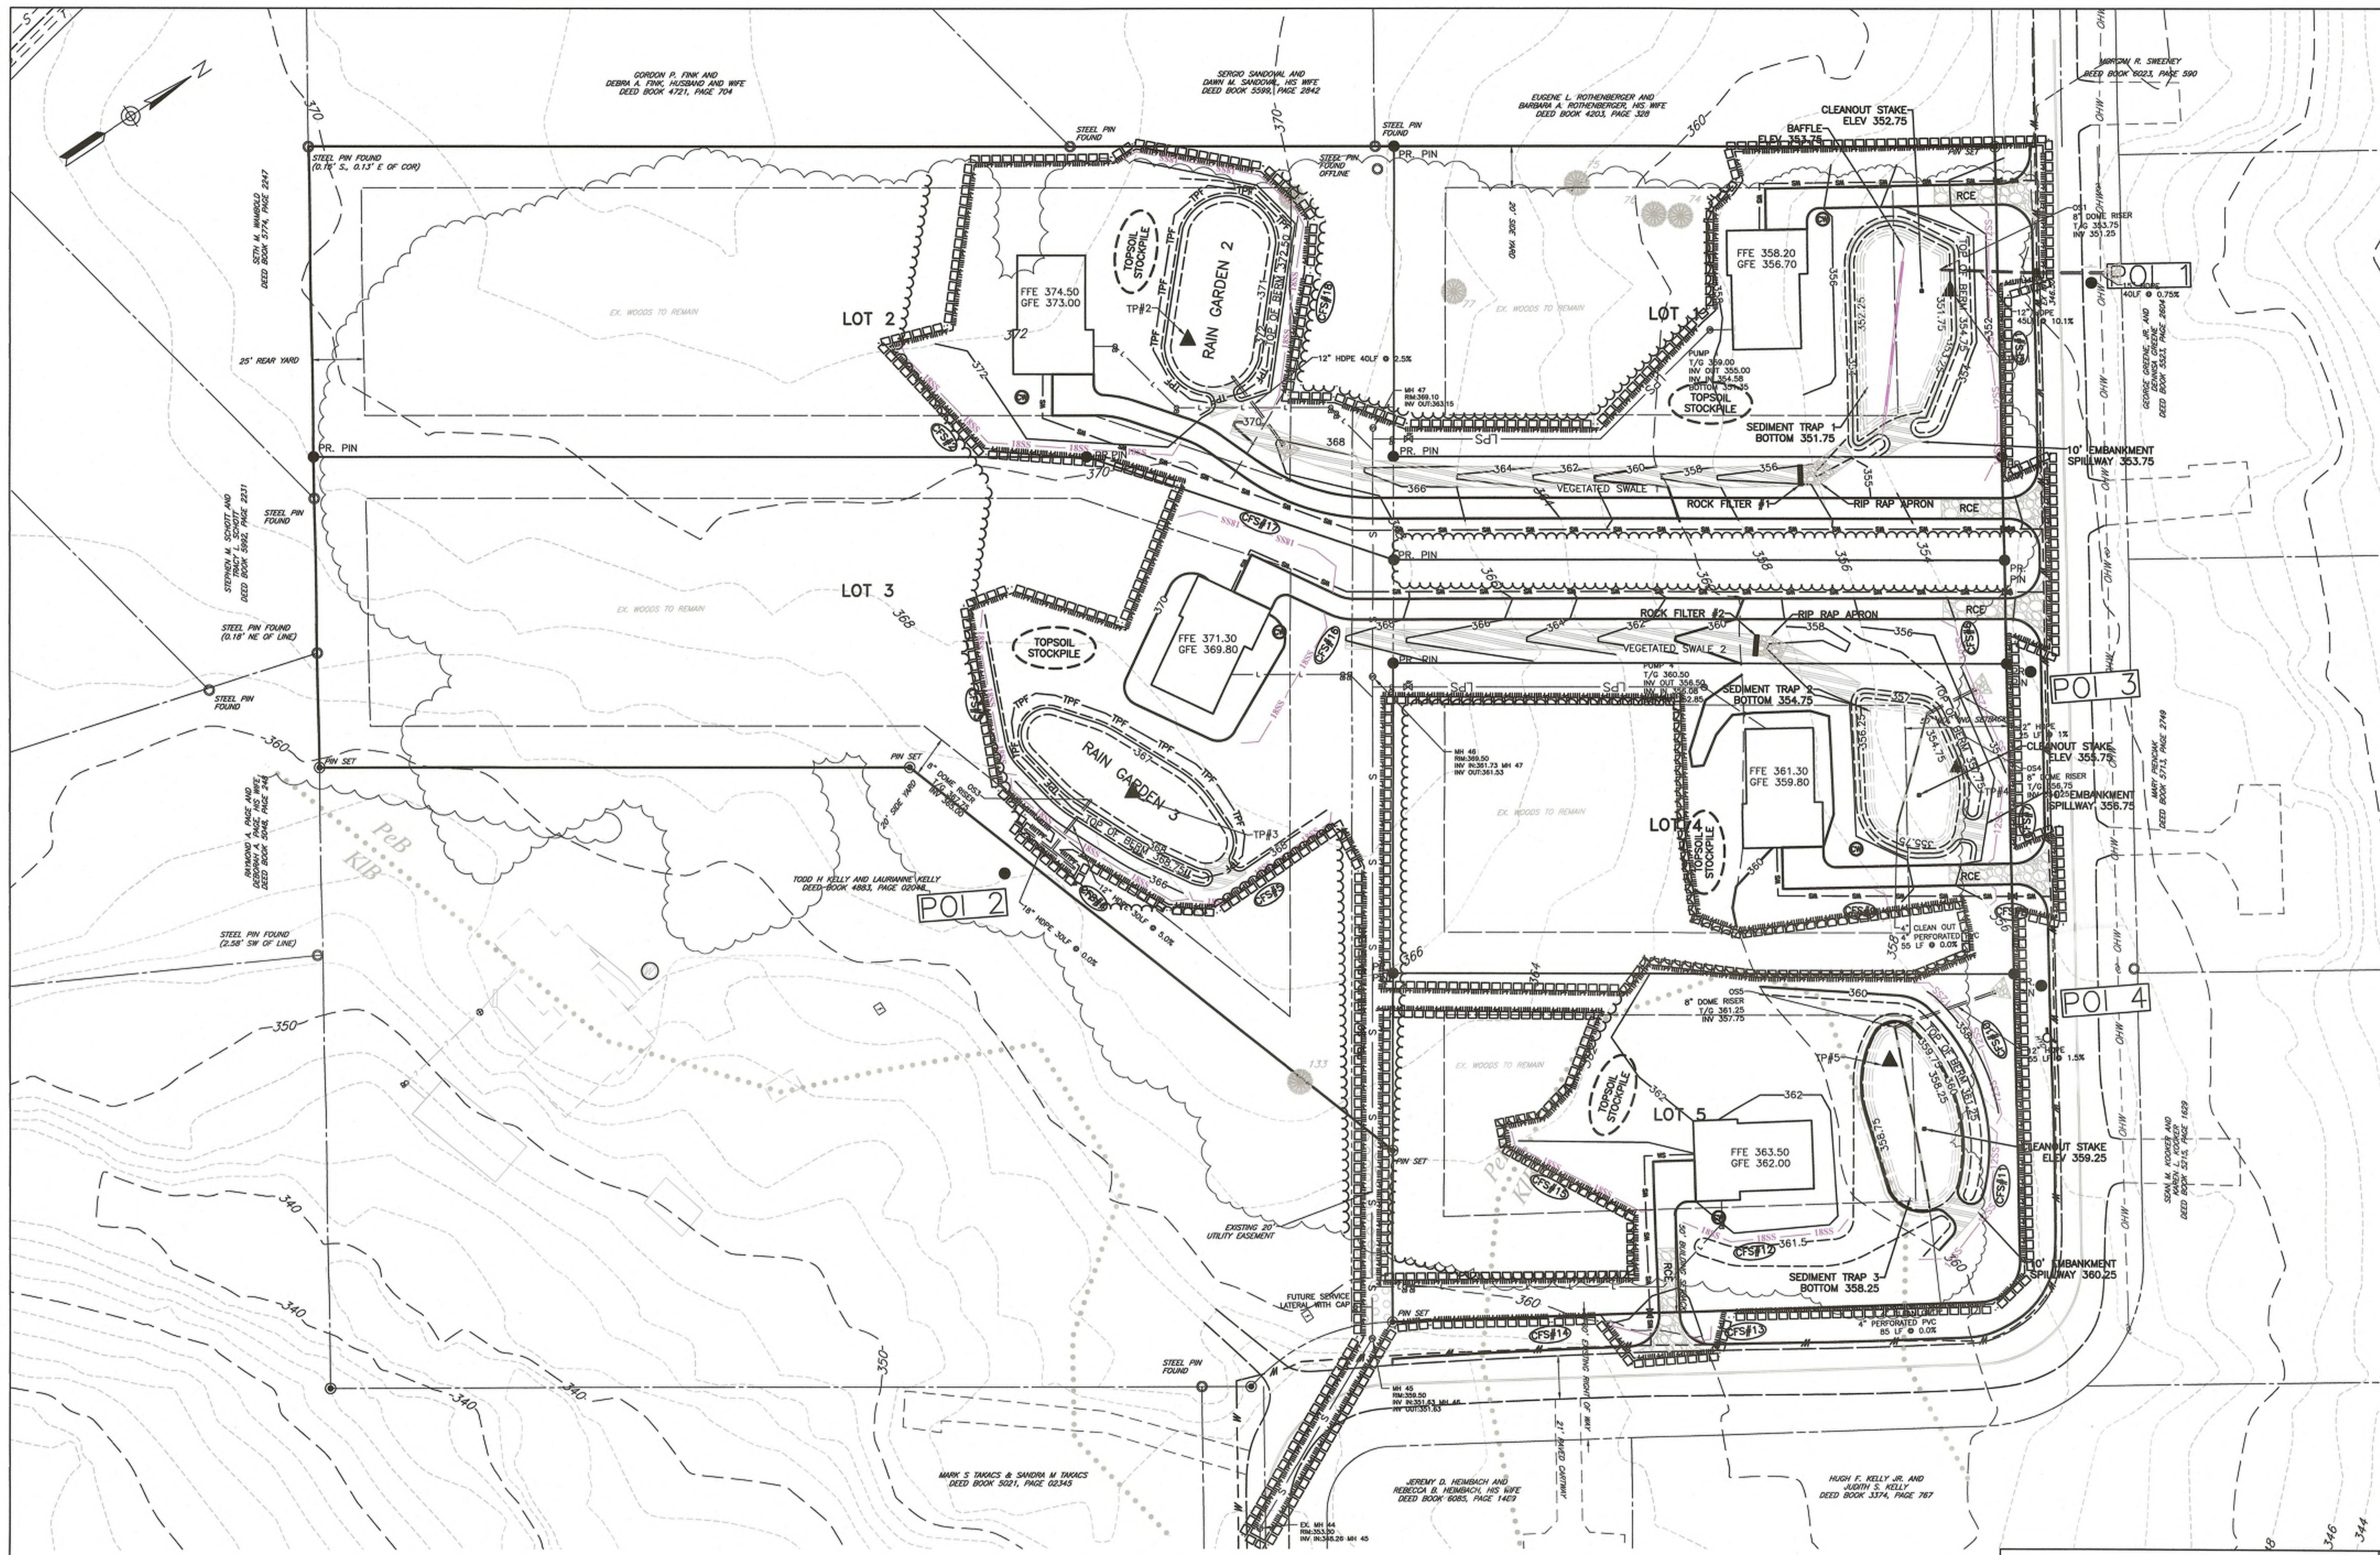

LEGEND

- EX. TRACT LINE
- EX. BOUNDARY
- EX. RIGHT-OF-WAY
- SETBACKS
- EX. SANITARY
- EX. MONUMENTATION
- EX. UTILITY POLE & GUY WIRE
- EX. OVERHEAD WIRES
- EX. SANITARY MANHOLE
- EX. TREELINE
- EX. SOILS
- EX. CONTOURS
- PR. CONTOURS
- INFILTRATION TEST PIT
- PR. EDGE OF PAVING
- PR. BUILDING
- PR. WATER SERVICE
- PR. SEWER LATERAL
- PR. FORCE MAIN
- PR. SANITARY SEWER
- PR. STORMWATER PIPE
- PR. SPILLWAY/CHANNEL LINING
- PR. RIP RAP
- PR. SEWER MANHOLE
- PR. SEWER CLEANOUT
- PR. SEWER SHUTOFF
- PR. WATER VALVE
- PR. TREES
- PR. COMPOST FILTER SOCK
- PR. PROTECTION FENCE
- PR. SEDIMENT TRAP BAFFLE
- PR. LIMIT OF DISTURBANCE
- NIPDES BOUNDARY
- WATERSHED
- CONCRETE WASHOUT
- TOPSOIL STOCKPILE
- ROCK CONSTRUCTION ENTRANCE

LIMIT OF DISTURBANCE 4.06 ACRES

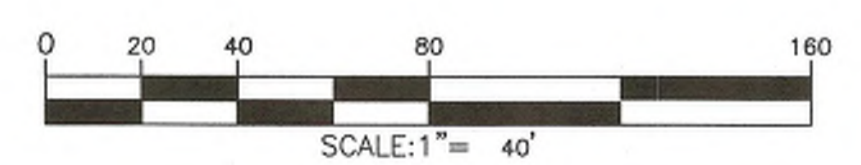

SOILS TABLE	
SYMBOL	NAME/DESC
PwB	PENN SILT LOAM, 3 TO 8 PERCENT SLOPES
KIB	KILNEVILLE CHANNERY SILT LOAM, 3 TO 8 PERCENT SLOPES

NO.	REVISION	DATE	BY	APP.
2.	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB
1.	REVISED PER PENNON REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB

CLIENT
R.B. ASHLEY CUSTOMS, LLC
 1011 RIDGE ROAD
 POTTSTOWN, PA 19465



SUBJECT
 EROSION AND SEDIMENTATION CONTROL PLAN

KELLY ACRES
 DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA



1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538		PROJECT NO. 20-374A
DESIGN BDB	CHKD. BY BDB	DWG. NO. ES120374A
DRAWN BY WJD	CHKD. BY	SHEET NO.
DATE 2020-09-04	SCALE 1"=40'	9 OF 17


P:\PROJECTS\20-374A_Robles - Kelly EA\Eng\PT120374A.dwg, 08-Feb-22, 12:03:19

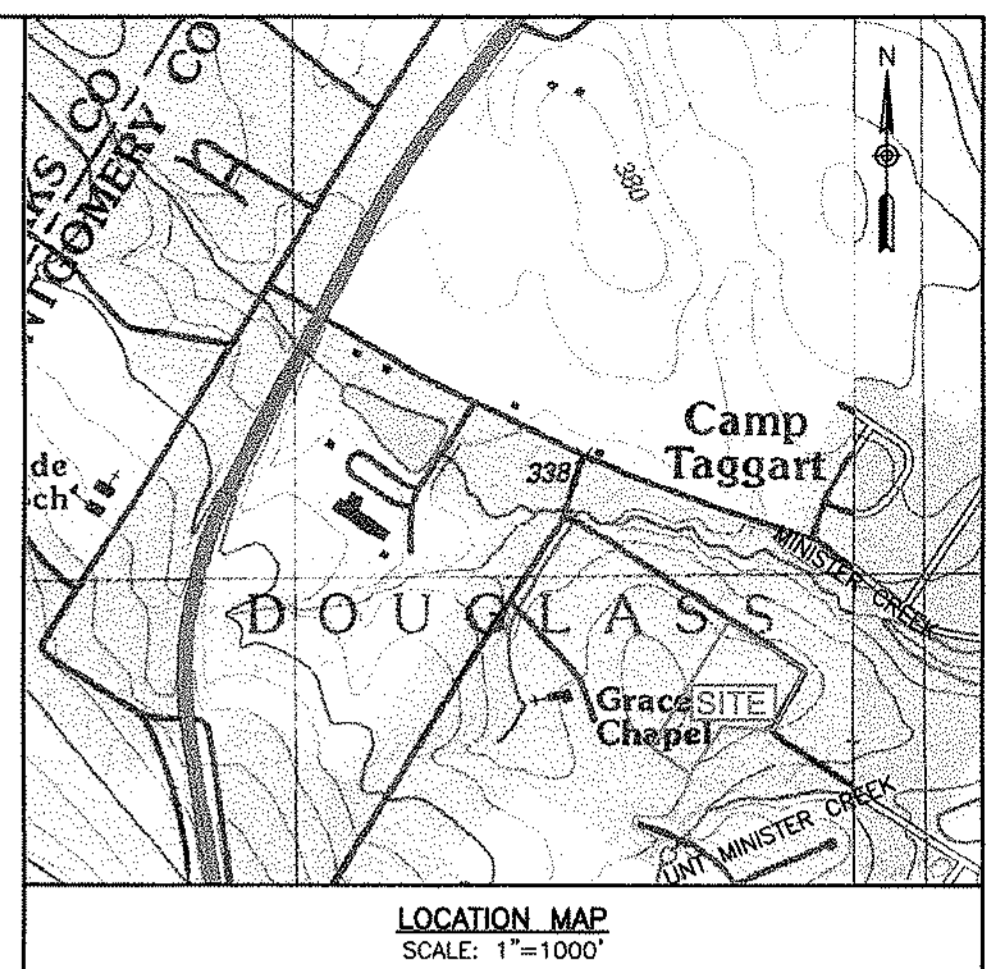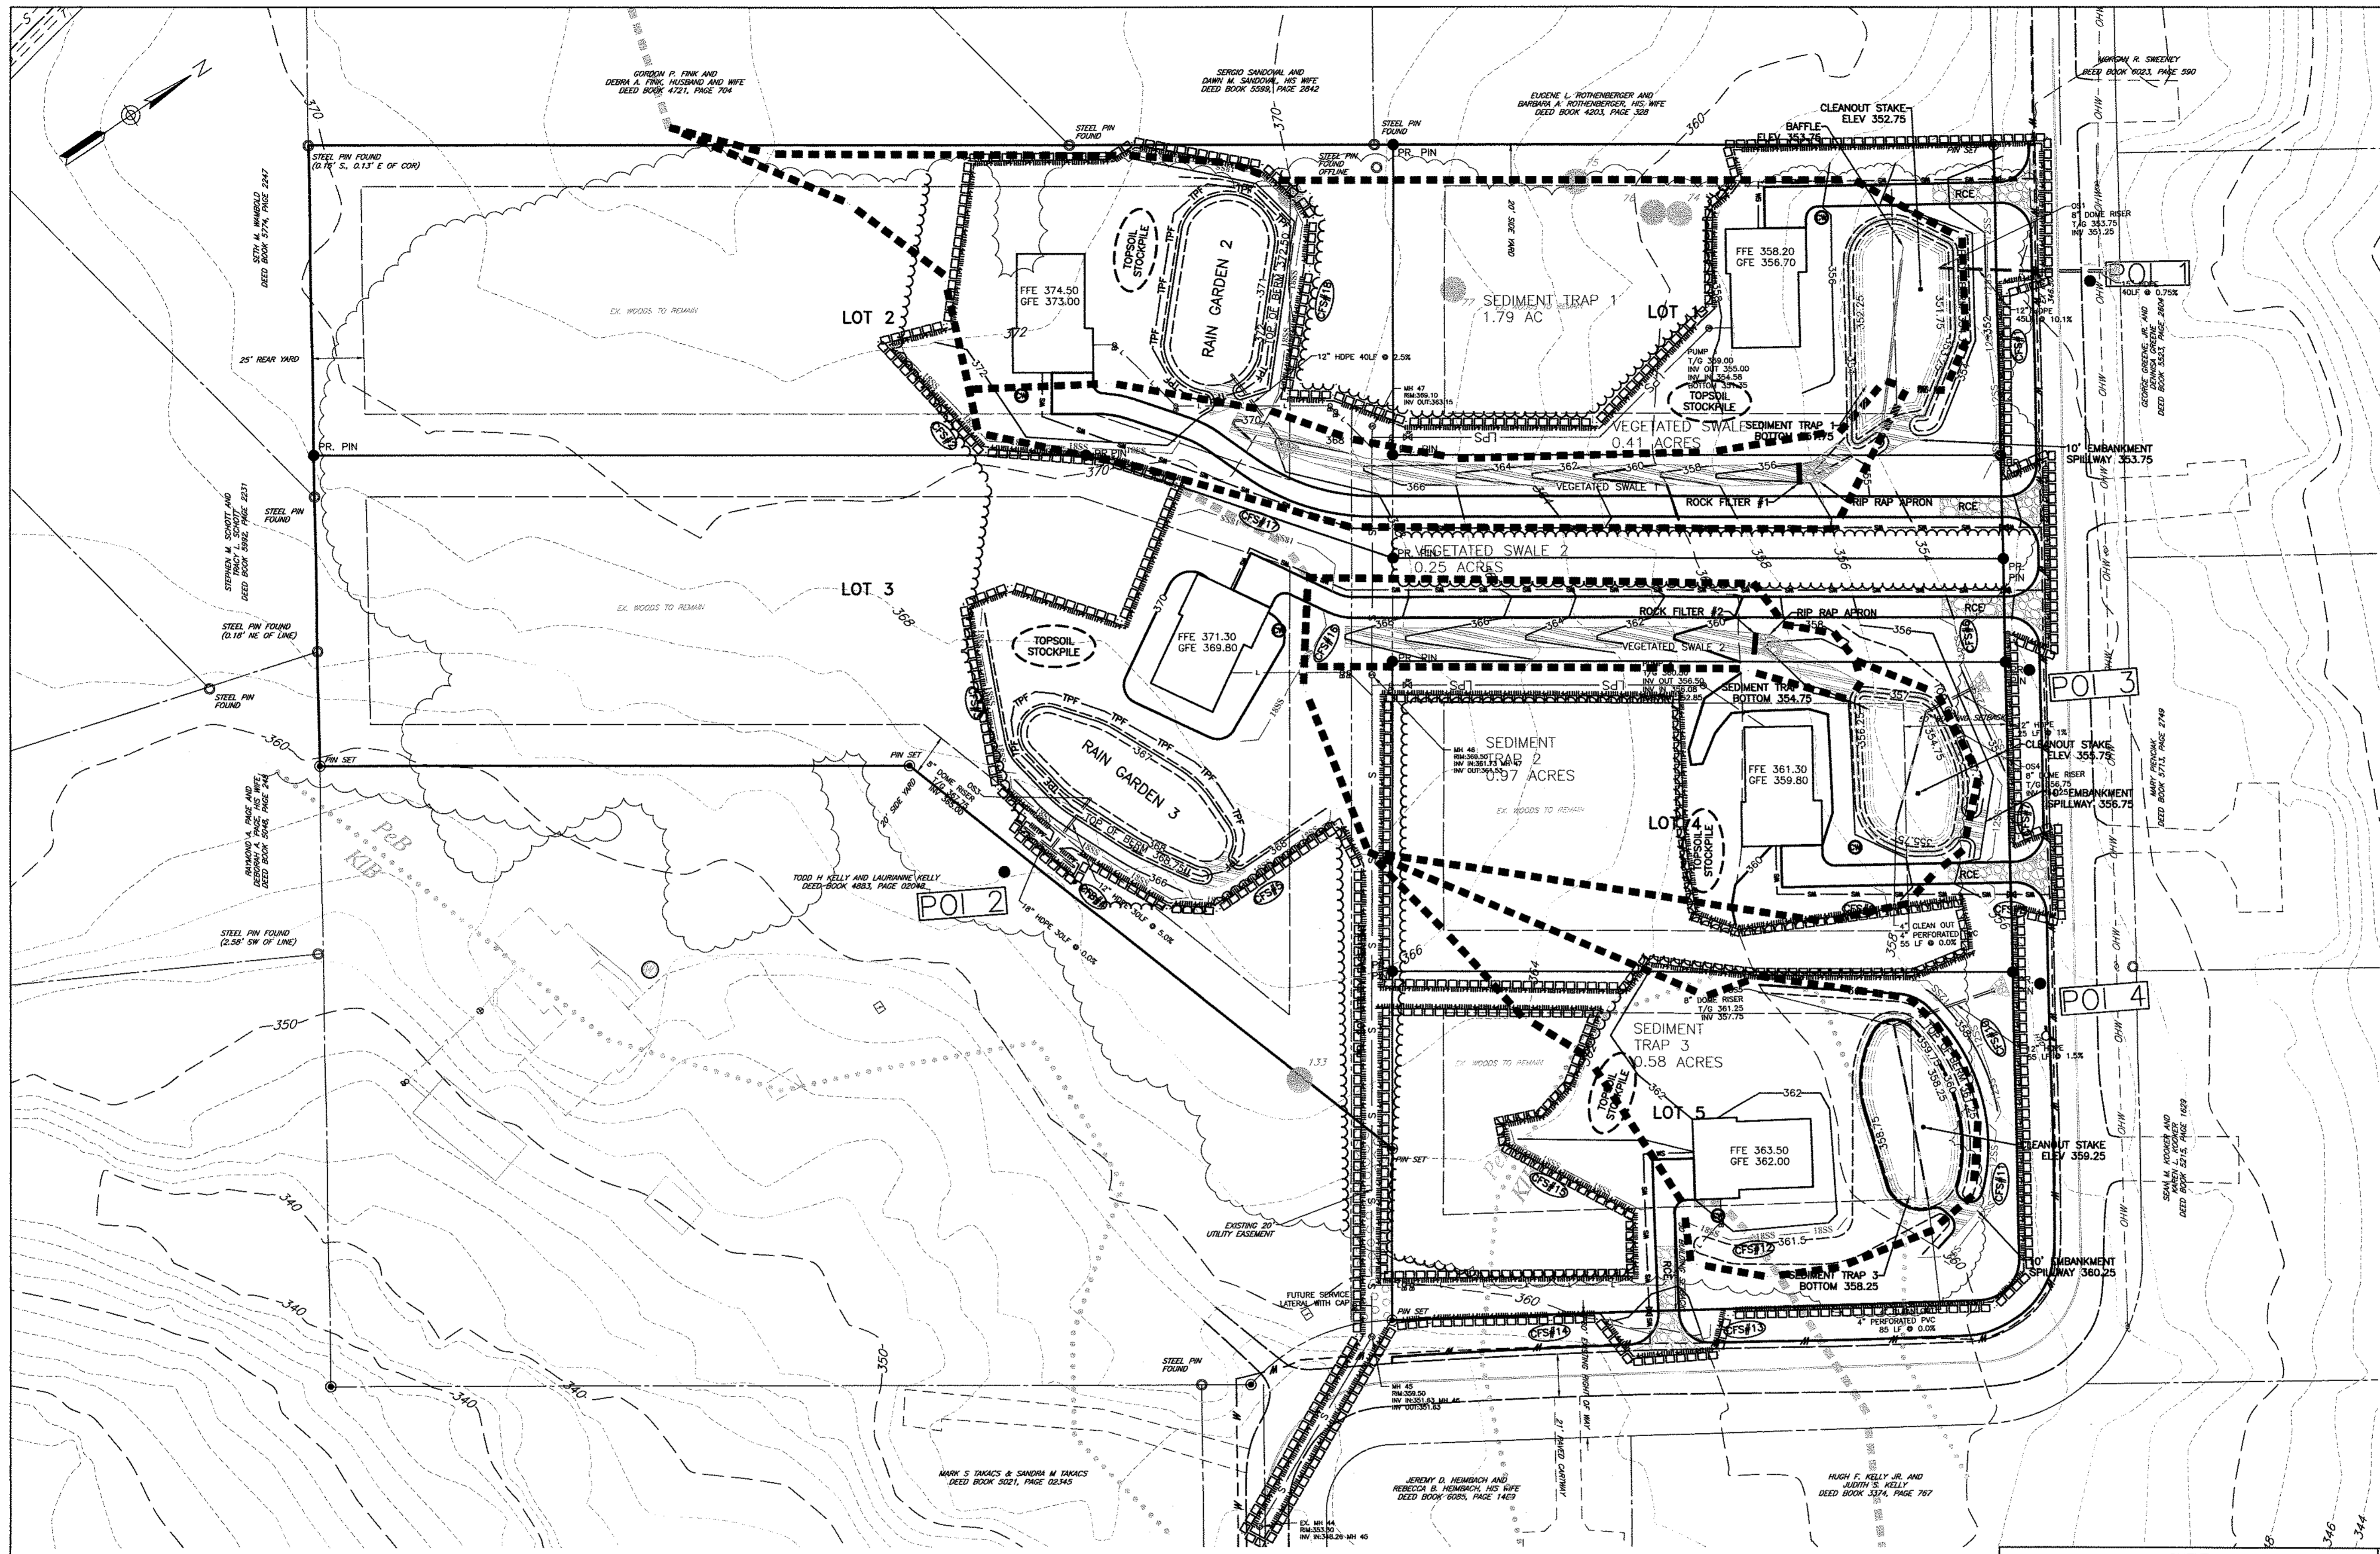

LEGEND

- EX. TRACT LINE
- EX. BOUNDARY
- EX. RIGHT-OF-WAY
- EX. SETBACKS
- EX. SANITARY
- EX. MONUMENTATION
- EX. UTILITY POLE & GUY WIRE
- EX. OVERHEAD WIRES
- EX. SANITARY MANHOLE
- EX. TREELINE
- EX. SOILS
- EX. CONTOURS
- PR. CONTOURS
- INFILTRATION TEST PIT
- PR. EDGE OF PAVING
- PR. BUILDING
- PR. WATER SERVICE
- PR. SEWER LATERAL
- PR. FORCE MAIN
- PR. SANITARY SEWER
- PR. STORMWATER PIPE
- PR. SPILLWAY/CHANNEL LINING
- PR. RIP RAP
- PR. SEWER MANHOLE
- PR. SEWER CLEANOUT
- PR. SEWER SHUTOFF
- PR. WATER VALVE
- PR. TREES
- PR. COMPOST FILTER SOCK
- PR. PROTECTION FENCE
- PR. SEDIMENT TRAP BAFFLE
- PR. LIMIT OF DISTURBANCE
- NPDES BOUNDARY
- WATERSHED
- CONCRETE WASHOUT
- TOPSOIL STOCKPILE
- ROCK CONSTRUCTION ENTRANCE

LIMIT OF DISTURBANCE 4.06 ACRES

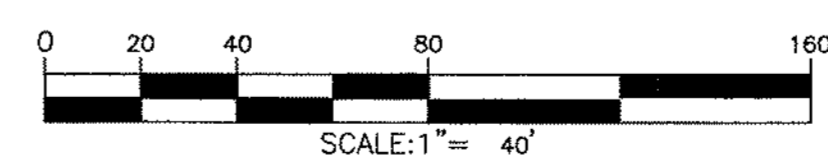


CLIENT
R.B. ASHLEY CUSTOMS, LLC
 1011 RIDGE ROAD
 POTTSTOWN, PA 19465

SUBJECT
 EROSION AND SEDIMENTATION CONTROL
 DRAINAGE AREA PLAN

KELLY ACRES

DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA

1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538		PROJECT NO. 20-374A
DESIGN BDB	CHKD. BY BDB	DWG. NO. ES220374A
DRAWN BY WJD	CHKD. BY	SHEET NO. 10 OF 17
DATE 2020-09-04	SCALE 1"=40'	

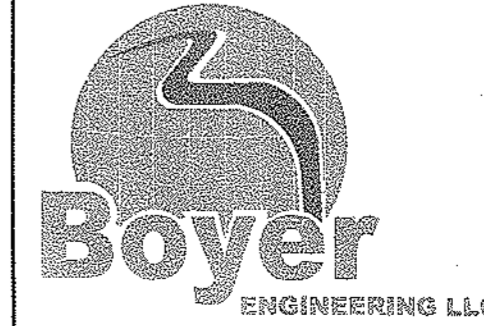

NO.	REVISION	DATE	BY	APP.
2	REVISED PER SDC REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB
1	REVISED PER PENNOM REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB

P:\PROJECTS\20-374A_Robins - Kelly LA\Drawings\2020\20200323.dwg, 08-Feb-22, 10:02:33

Specification Sheet
EroNet™ P300° Permanent
Erosion Control Blanket

DESCRIPTION
The permanent erosion control blanket shall be a machine-produced mat of 100% UV stable polypropylene fiber. The matting shall be of consistent thickness with the synthetic fibers evenly distributed over the entire area of the mat. The matting shall be covered on the top side with black heavy-weight UV-stabilized polypropylene netting having ultraviolet additives to delay breakdown and an approximate 0.50 x 0.50 inch (1.27 x 1.27 cm) mesh. The bottom mat shall also be UV-stabilized polypropylene with a 0.62 x 0.62 inch (1.57 x 1.57 cm) mesh size. The blanket shall be sewn together on 1.5 inch (3.81 cm) centers with non-degradable thread. All mats shall be manufactured with a colored thread stitched along both outer edges as an overlap guide for adjacent mats. The P300 shall meet Type SA, SB specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration (FHWA) FP-03 Section 715.18

Property	Test Method	Typical Value
Thickness	ASTM D6525	0.47 in. (11.94 mm)
Resiliency	ASTM D6524	93.5%
Density	ASTM D292	0.98 g/cm ³
Mass/Unit Area	ASTM D6566	18.03 oz/yd ² (4.43 g/m ²)
UV Stability	ASTM D4355/1000 hr	90%
Porosity	ECTC Guidelines	95.89%
Stiffness	ASTM D3388	0.94 in-lb (0.00378 mg-cm)
Light Penetration	ASTM D6567	17.9%
Tensile Strength - MD	ASTM D6818	438 lbs/ft (6.49 kN/m)
Elongation - MD	ASTM D6818	28.9%
Tensile Strength - TD	ASTM D6818	291.9 lbs/ft (4.32 kN/m)
Elongation - TD	ASTM D6818	26.7%
Biomass Improvement	ASTM D7322	49.7%

Material	Weight
UV-stable Polypropylene Fiber	0.78 lbs/yd ² (0.38 kg/m ²)
UV-stabilized Polypropylene	5 lbs/1000 sq ft (24.4 g/m ²)
Bottom UV-stabilized Polypropylene	3 lbs/1000 sq ft (14.7 g/m ²)

Thread	UV stable
Weight	8.07 ft (2.03 m)
Length	100 ft (30.48 m)
Weight 10%	61 lbs (27.66 kg)
Area	89 sq yd (86.0 sq m)

Slope Length (L)	Slope Gradient (G)
≤ 20 ft (6 m)	0.001
20-50 ft	0.036
≥ 50 ft (15.2 m)	0.070

Flow Depth
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020


Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020


Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

Flow Velocity
Manning's n
≤ 0.50 ft (0.15 m) 0.034
0.50 - 2.0 ft 0.034-0.020
≥ 2.0 ft (0.60 m) 0.020

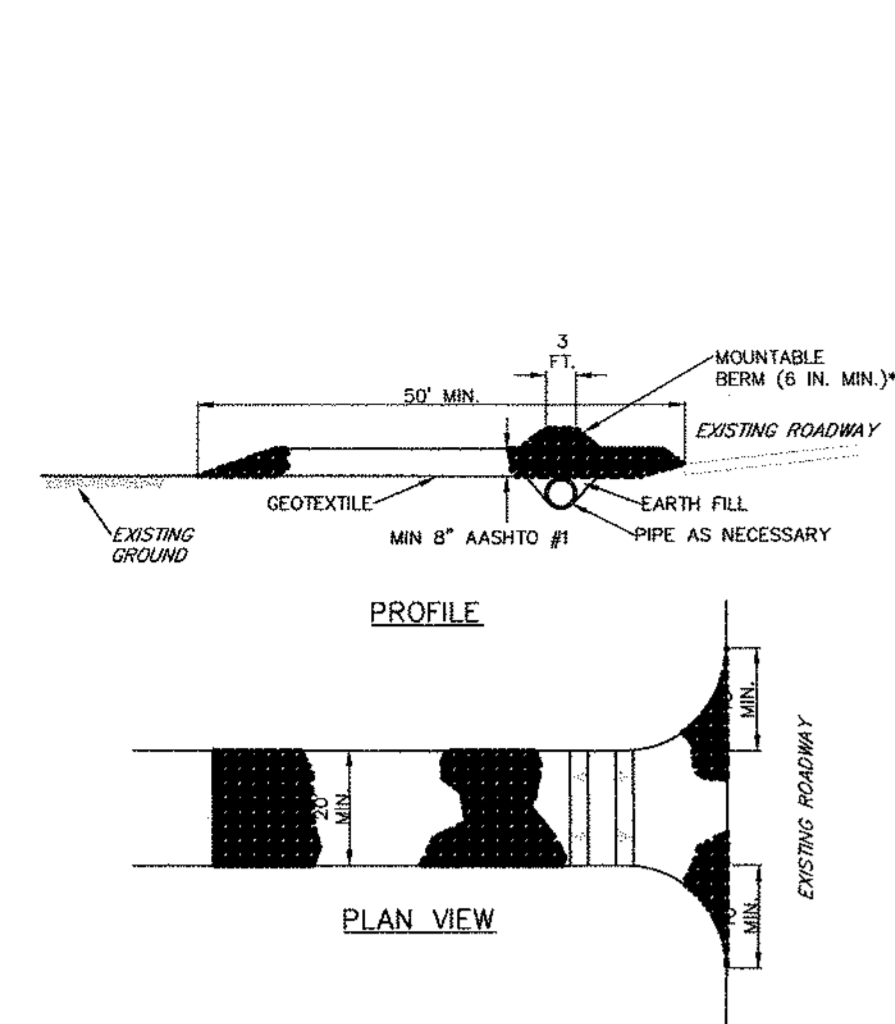

NOTES:
REMOVE TOPSOIL PRIOR TO INSTALLATION OF ROCK CONSTRUCTION ENTRANCE. REMOVE ROCK OVER FULL WIDTH OF ENTRANCE.
RUNOFF SHALL BE DIVERTED FROM ROADWAY TO A SUITABLE SEDIMENT REMOVAL BMP PRIOR TO ENTERING ROCK CONSTRUCTION ENTRANCE.
MOUNTABLE BERM SHALL BE INSTALLED WHEREVER OPTIONAL CURBPIPE IS USED AND PROPER PIPE COVER AS SPECIFIED BY MANUFACTURER IS NOT OTHERWISE PROVIDED. PIPE SHALL BE SIZED APPROPRIATELY FOR SIZE OF DITCH BEING CROSSED.
MAINTENANCE: ROCK CONSTRUCTION ENTRANCE THICKNESS SHALL BE CONSTANTLY MAINTAINED TO THE SPECIFIED DIMENSIONS BY ADDING ROCK. A STOCKPILE SHALL BE MAINTAINED ON SITE FOR THIS PURPOSE. ALL SEDIMENT DEPOSITED ON PAVED ROADWAYS SHALL BE REMOVED AND RETURNED TO THE CONSTRUCTION SITE IMMEDIATELY. IF EXCESSIVE AMOUNTS OF SEDIMENT ARE BEING DEPOSITED ON ROADWAY, EXTEND LENGTH OF ROCK CONSTRUCTION ENTRANCE BY 50 FOOT INCREMENTS UNTIL CONDITION IS ALLEVIATED OR INSTALL WASH RACK, WASHING THE ROADWAY OR SWEEPING THE DEPOSITS INTO ROADWAY DITCHES, SEWERS, CULVERTS, OR OTHER DRAINAGE COURSES IS NOT ACCEPTABLE.

STANDARD CONSTRUCTION DETAIL #3-1
ROCK CONSTRUCTION ENTRANCE
NOT TO SCALE

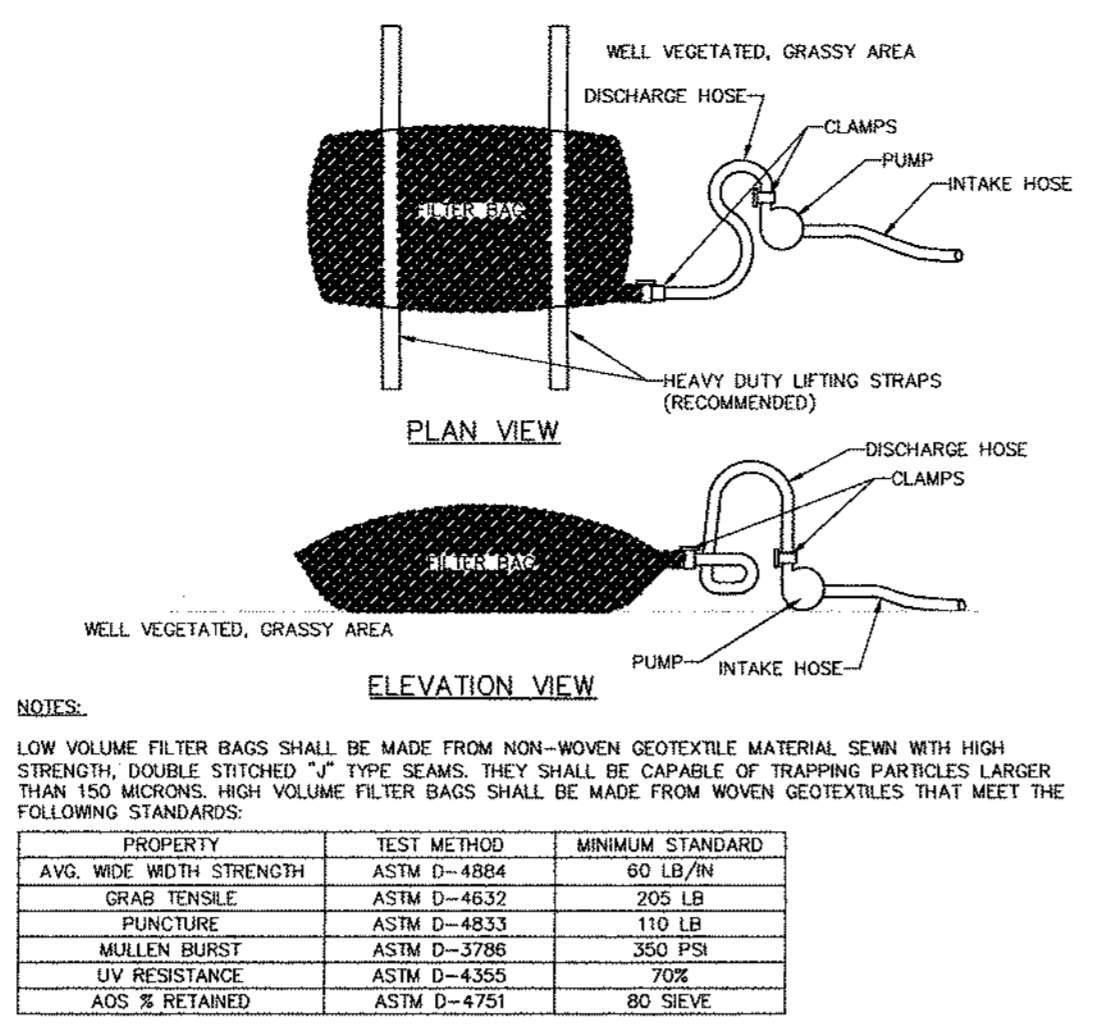


NOTES:
LOW VOLUME FILTER BAGS SHALL BE MADE FROM NON-WOVEN GEOTEXTILE MATERIAL SEWN WITH HIGH STRENGTH, DOUBLE STITCHED "T" TYPE SEAMS. THEY SHALL BE CAPABLE OF TRAPPING PARTICLES LARGER THAN 150 MICRONS. HIGH VOLUME FILTER BAGS SHALL BE MADE FROM WOVEN GEOTEXTILES THAT MEET THE FOLLOWING STANDARDS:

PROPERTY	TEST METHOD	MINIMUM STANDARD
AVG. WIDE WIDTH STRENGTH	ASTM D-4584	50 LB/IN
GRAB TENSILE	ASTM D-4632	205 LB
PUNCTURE	ASTM D-4833	110 LB
MULLER BURST	ASTM D-3786	350 PSI
UV RESISTANCE	ASTM D-4355	70%
ADS % RETAINED	ASTM D-4751	80 SIEVE


A SUITABLE MEANS OF ACCESSING THE BAG WITH MACHINERY REQUIRED FOR DISPOSAL PURPOSES SHALL BE PROVIDED. FILTER BAGS SHALL BE REPLACED WHEN THEY BECOME 1/2 FULL OF SEDIMENT. SPARE BAGS SHALL BE KEPT AVAILABLE FOR REPLACEMENT OF THOSE THAT HAVE FAILED OR ARE FILLED. BAGS SHALL BE PLACED ON STRAPS TO FACILITATE REMOVAL UNLESS BAGS COME WITH LIFTING STRAPS ALREADY ATTACHED.
BAGS SHALL BE LOCATED IN WELL-VEGETATED (GRASSY AREA), AND DISCHARGE ONTO STABLE, EROSION RESISTANT AREAS. WHERE THIS IS NOT POSSIBLE, A GEOTEXTILE UNDERLAYMENT AND FLOW PATH SHALL BE PROVIDED. BAGS MAY BE PLACED ON FILTER STONE TO INCREASE DISCHARGE CAPACITY. BAGS SHALL NOT BE PLACED ON SLOPES GREATER THAN 5% FOR SLOPES EXCEEDING 5%. CLEAN ROCK OR OTHER NON-ERODIBLE AND NON-POLLUTING MATERIAL MAY BE PLACED UNDER THE BAG TO REDUCE SLOPE STEEPNESS.
NO DOWNSLOPE SEDIMENT BARRIER IS REQUIRED FOR MOST INSTALLATIONS. COMPOST BERM OR COMPOST FILTER SOCK SHALL BE INSTALLED BELOW BAGS LOCATED IN HO OR EV WATERSHEDS, WITHIN 50 FEET OF ANY RECEIVING SURFACE WATER OR WHERE GRASSY AREA IS NOT AVAILABLE.
THE PUMP DISCHARGE HOSE SHALL BE INSERTED INTO THE BAGS IN THE MANNER SPECIFIED BY THE MANUFACTURER AND SECURELY CLAMPED. A PIECE OF PVC PIPE IS RECOMMENDED FOR THIS PURPOSE.
THE PUMPING RATE SHALL BE NO GREATER THAN 750 GPM OR 1/2 THE MAXIMUM SPECIFIED BY THE MANUFACTURER, WHICHEVER IS LESS. PUMP INTAKES SHALL BE FLOATING AND SCREENED.
FILTER BAGS SHALL BE INSPECTED DAILY. IF ANY PROBLEM IS DETECTED, PUMPING SHALL CEASE IMMEDIATELY AND NOT RESUME UNTIL THE PROBLEM IS CORRECTED.

STANDARD CONSTRUCTION DETAIL #3-16
PUMPED WATER FILTER BAG
NOT TO SCALE

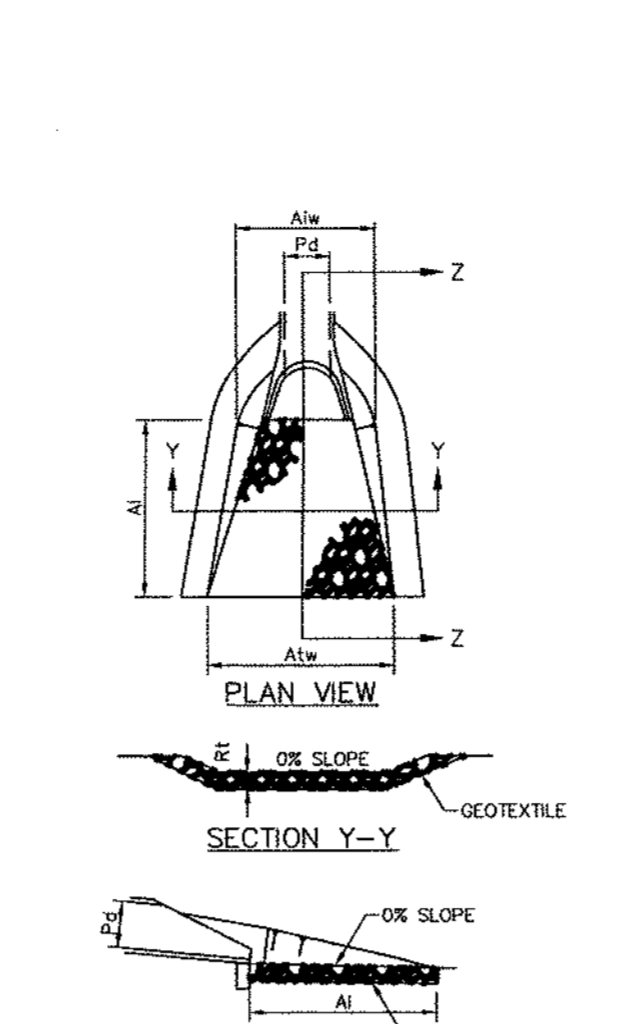

PIPE OUTLET NO.	PIPE DIA (IN)	RIPRAP SIZE (IN)	RIPRAP THICK (IN)	APRON LENGTH (FT)	INITIAL WIDTH (FT)	TERMINAL WIDTH (FT)
ES1, ES2, ES3	12	4	18	8	3	11


STANDARD CONSTRUCTION DETAIL #9-1
RIPRAP APRON AT PIPE OUTLET WITH FLARED END SECTION OR ENDWALL
NOT TO SCALE

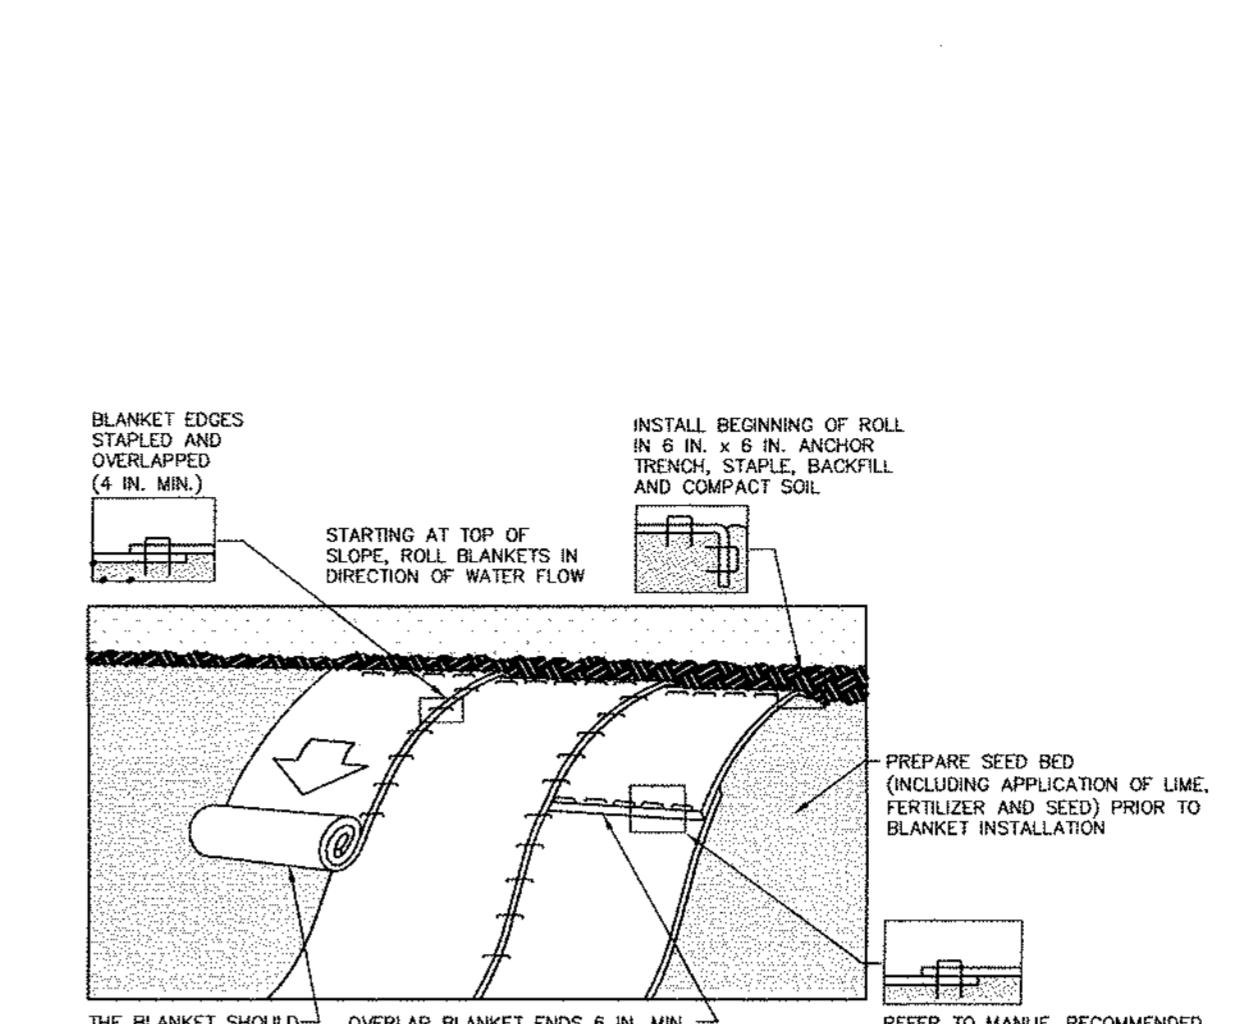

NOTES:
SEED AND SOIL AMENDMENTS SHALL BE APPLIED ACCORDING TO THE RATES IN THE PLAN DRAWINGS PRIOR TO INSTALLING THE BLANKET.
SLOPE SURFACE SHALL BE FREE OF ROCKS, CLOUDS, STICKS, AND GRASS.
BLANKET SHALL HAVE GOOD CONTINUOUS CONTACT WITH UNDERLYING SOIL THROUGHOUT ENTIRE LENGTH. LAY BLANKET LOOSELY AND STAKE OR STAPLE TO MAINTAIN DIRECT CONTACT WITH SOIL. DO NOT STRETCH BLANKET.
THE BLANKET SHALL BE STAPLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
BLANKETED AREAS SHALL BE INSPECTED WEEKLY AND AFTER EACH RUNOFF EVENT UNTIL PERENNIAL VEGETATION IS ESTABLISHED TO A MINIMUM UNIFORM 70% COVERAGE THROUGHOUT THE BLANKETED AREA. DAMAGED OR DISPLACED BLANKETS SHALL BE RESTORED OR REPLACED WITHIN 4 CALENDAR DAYS.


STANDARD CONSTRUCTION DETAIL #11-1
EROSION CONTROL BLANKET INSTALLATION
NOT TO SCALE

NORTH AMERICAN GREEN
4609 E. Broomfield Ave., Suite 100
Littleton, CO 80120
800-772-7040

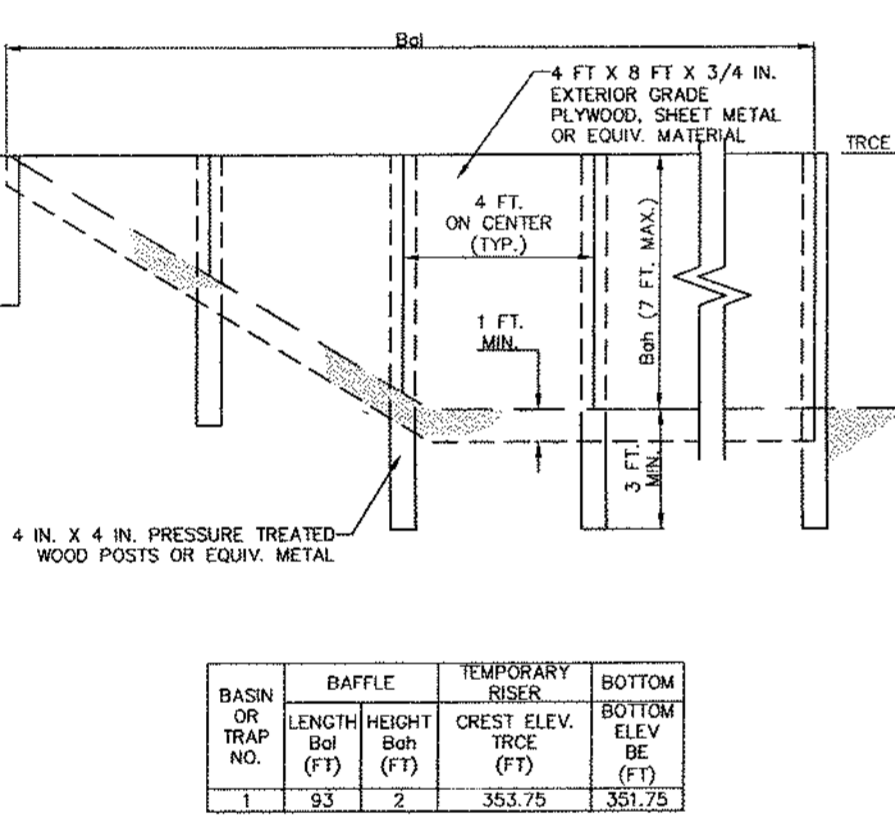

TRAP NO.	BAFFLE LENGTH (FT)	BAFFLE HEIGHT (FT)	TEMPORARY RISER CREST ELEV. (FT)	BOTTOM TRAP ELEV. (FT)
1	9.3	2	353.75	351.75


STANDARD CONSTRUCTION DETAIL #7-14
BAFFLE
NOT TO SCALE

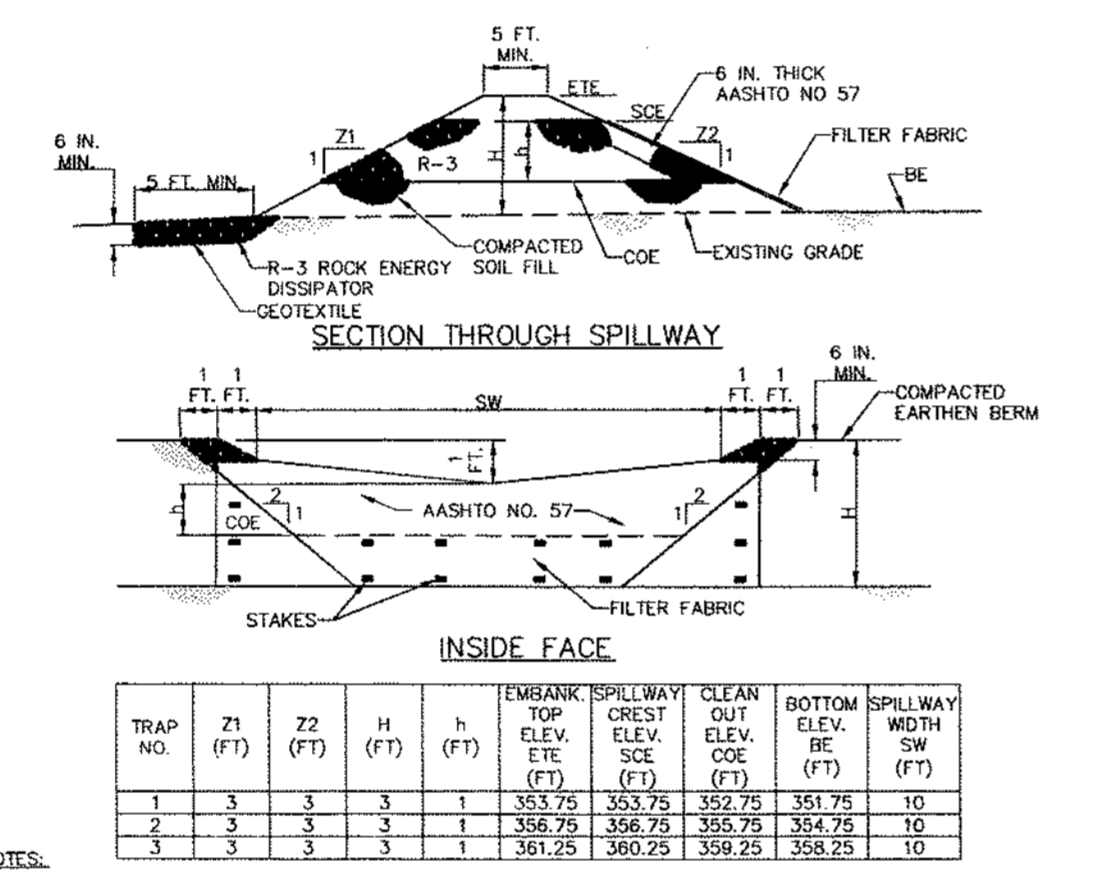

TRAP NO.	Z1 (FT)	Z2 (FT)	H (FT)	h (FT)	EMBANKMENT TOP CREST ELEV. (FT)	SPILLWAY CREST ELEV. (FT)	CLEAN OUT ELEV. (FT)	BOTTOM ELEV. (FT)	SPILLWAY WIDTH (FT)	SPILLWAY SW (FT)
1	3	3	3	1	353.75	353.75	352.75	351.75	10	10
2	3	3	3	1	356.75	356.75	355.75	354.75	10	10
3	3	3	3	1	361.25	361.25	360.25	358.25	10	10


NOTES:
EMBANKMENT OUTLET SHALL BE COMPOSED ENTIRELY OF ROCK ABOVE CLEAN OUT ELEVATION (COE); MAIN BODY R-3 OR LARGER --- R-4 TO BE USED FOR DRAINAGE AREAS GREATER THAN 3.0 ACRES, INSIDE FACE AASHTO # 57 STONE OR SMALLER, A 6 IN. THICK LAYER OF COMPOST, COMPOST SOCK, OR CLEAN SAND SHALL BE INSTALLED ON TOP OF THE AASHTO #57 STONE AND SECURELY ANCHORED IN HO WATERSHEDS. 24 IN. DIAMETER COMPOST SOCK(S) SHALL BE USED IN PLACE OF FILTER FABRIC AND AASHTO #57 STONE IN EV WATERSHEDS.
FILL MATERIAL FOR THE EMBANKMENTS SHALL BE FREE OF ROOTS, OR OTHER WOODY VEGETATION, ORGANIC MATERIAL, LARGE STONES, AND OTHER OBJECTIONABLE MATERIALS. THE EMBANKMENT SHALL BE COMPACTED IN LAYERS OF NOT MORE THAN 9 IN.; THE MAXIMUM ROCK SIZE SHALL BE NO GREATER THAN 6 IN.
UPON COMPLETION, THE EMBANKMENT SHALL BE SEEDED AND MULCHED OR OTHERWISE STABILIZED ACCORDING TO THE SPECIFICATIONS OF THE E&S PLAN DRAWINGS.
ALL SEDIMENT TRAPS SHALL BE INSPECTED AT LEAST WEEKLY AND AFTER EACH RUNOFF EVENT.
ACCESS FOR SEDIMENT REMOVAL AND OTHER REQUIRED MAINTENANCE ACTIVITIES SHALL BE PROVIDED.
A CLEAN OUT STAKE SHALL BE PLACED NEAR THE CENTER OF EACH TRAP. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT HAS REACHED THE CLEAN OUT ELEVATION ON THE STAKE AND THE TRAP RESTORED TO ITS ORIGINAL DIMENSIONS. DISPOSE OF MATERIALS REMOVED FROM THE TRAP IN THE MANNER DESCRIBED IN THE E&S PLAN.
CHECK EMBANKMENTS, SPILLWAYS, AND OUTLETS FOR EROSION, PIPING AND SETTLEMENT, CLOGGED OR DAMAGED SPILLWAYS AND/OR EMBANKMENTS SHALL BE IMMEDIATELY RESTORED TO THE DESIGN SPECIFICATIONS.
DISPLACED RIPRAP WITHIN THE SPILLWAY OR OUTLET PROTECTION SHALL BE REPLACED IMMEDIATELY.
ACCUMULATED SEDIMENT SHALL BE REMOVED AND DISTURBED AREAS INSIDE THE TRAP SHALL BE STABILIZED BEFORE CONVERSION TO A STORMWATER MANAGEMENT FACILITY. TO ASSIST IN REMOVING SEDIMENT, WHICH MAY BE SATURATED, A DEVICE SUCH AS IS SHOWN IN STANDARD CONSTRUCTION DETAIL #7-15 MAY BE USED TO DEWATER THE SEDIMENT PRIOR TO ITS REMOVAL.

STANDARD CONSTRUCTION DETAIL #8-1
EMBANKMENT SEDIMENT TRAP
NOT TO SCALE

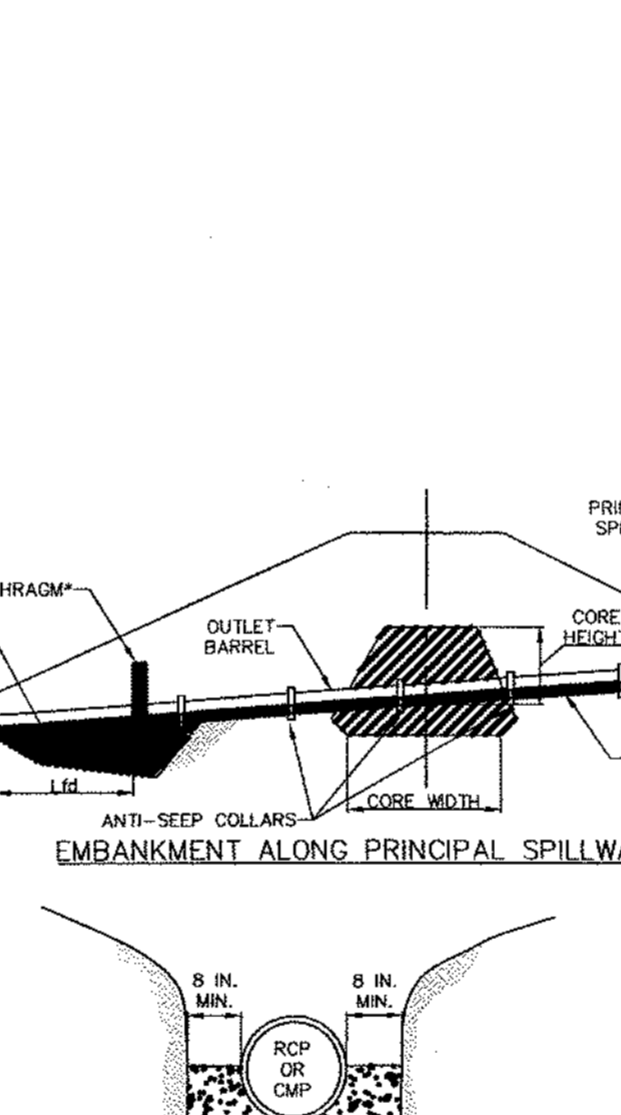


NOTES:
A CONCRETE CRADLE MAY BE USED IN CONJUNCTION WITH ANTI-SEEP COLLARS AND/OR FILTER DIAPHRAGM.
ANTI-SEEP COLLAR NUMBER, SIZE AND SPACING SHALL BE AS SHOWN ELSEWHERE IN PLAN.
FILTER DIAPHRAGM LOCATION (L14) SHALL BE AS SHOWN IN FIGURE 7.8 OF THE PA DEP EROSION CONTROL MANUAL.

STANDARD CONSTRUCTION DETAIL #7-15
CONCRETE CRADLE FOR BASIN OR TRAP OUTLET BARREL
NOT TO SCALE

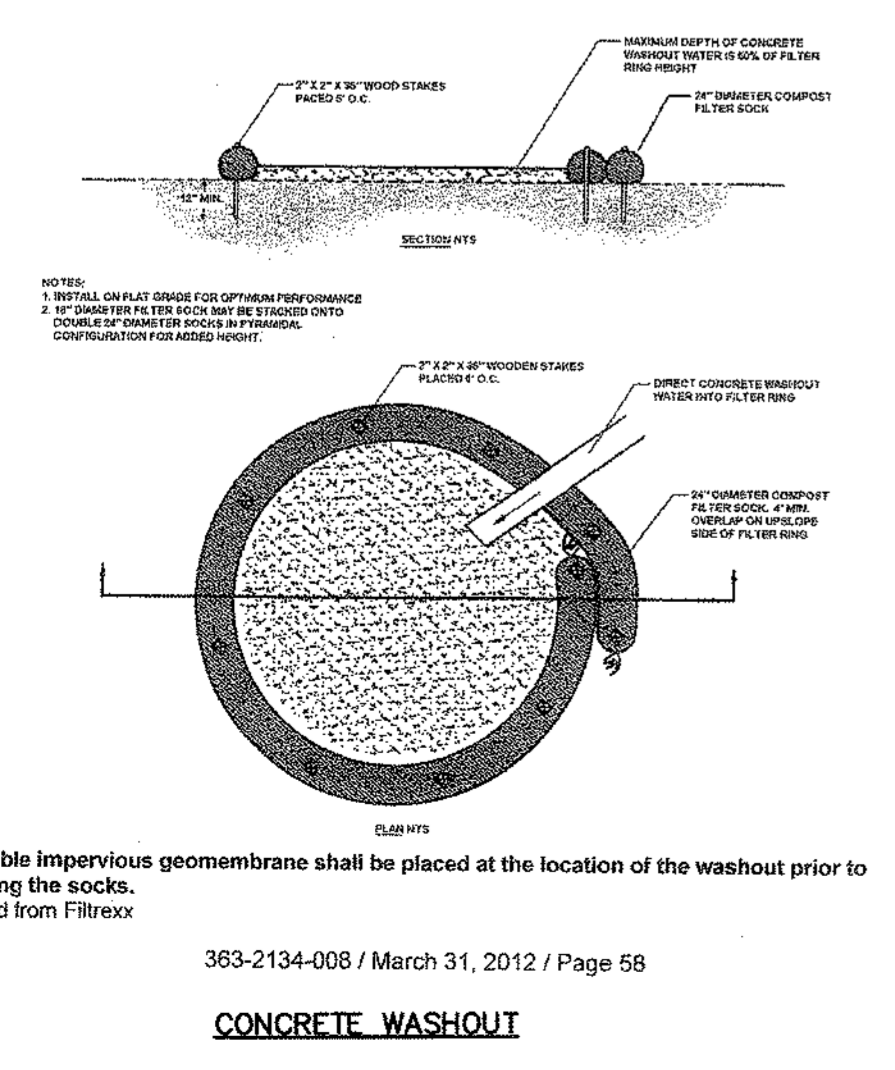

STANDARD CONSTRUCTION DETAIL #15
CONCRETE WASHOUT
NOT TO SCALE

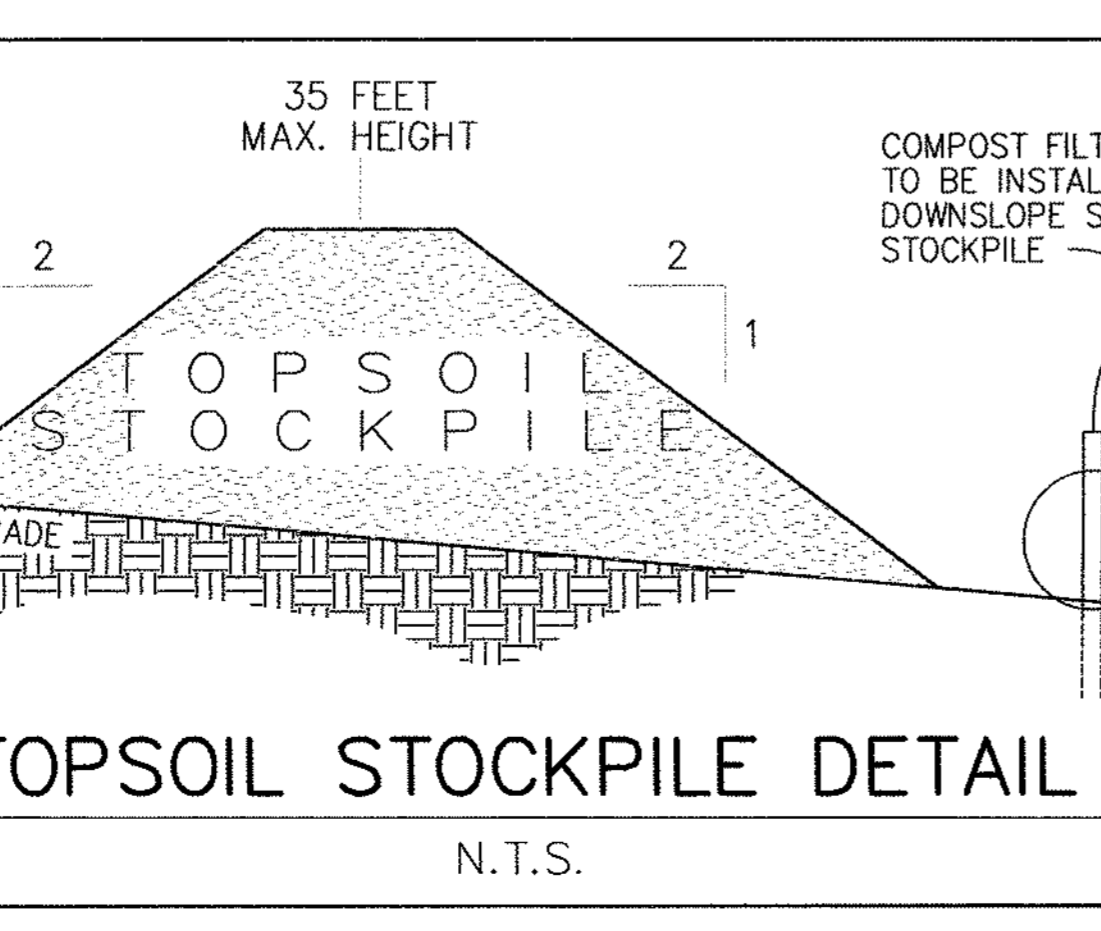

STANDARD CONSTRUCTION DETAIL #16
TOPSOIL STOCKPILE DETAIL
N.T.S.

NO.	REVISION	DATE	BY	APP.
1.	REVISED PER PENNION REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCGO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB
2.	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB

CLIENT	R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465	SUBJECT	EROSION AND SEDIMENTATION CONTROL DETAILS
SEAL		DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA	PROJECT NO. 20-374A
DESIGN	BDB	CHKD. BY	BDB
DRAWN BY	WJD	CHKD. BY	BDB
DATE	2020-09-04	SCALE	NOT TO SCALE
			DWG. NO. ES320374A
			SHEET NO. 11 OF 17

Lot 3

1. Install the Rock Construction Entrance, clear and grub as needed.
2. Install the Compost Filter Socks 3, 4, 5, 16, and 17 in the locations shown on the plan.
3. Clear and grub for all disturbed areas.
4. Strip topsoil, stockpile and immediately stabilize with temporary seed and mulch.
5. Install the concrete washout area where shown on the Erosion Control Plans per the details for the Filtrrex® Filter Ring prior to starting any concrete work on the site.
6. Install Vegetated Swale 2 and permanently stabilize. If Sediment Trap 2 is not in operation, the rock filter outlet and rip rap apron shall be installed.
7. The house, driveway, and site grading may begin using the following procedure:

- The contractor shall ensure that the runoff from all possible earth disturbance activities shall constantly be directed towards compost filter socks.
- Remove and grub the root material.
- Strip the topsoil from the proposed disturbed area.
- Place the topsoil where shown on the plan and seed and mulch the area.
- Place fill and compact to proposed grades starting downhill working uphill.
- The subgrade shall be rolled and the stone placed where shown on the plan for the driveway.
- Begin house construction. Excavated material shall be placed on the subsoil stockpile, seeded, and mulched.
- Begin installing the utilities using the following procedure. The utility lines may be installed simultaneously if desired by the O/RP:
 - o The sewer laterals.
 - o The water service line.
 - o The gas, electric, telephone and cable lines, if proposed, shall be installed. The open trenches shall be backfilled and stabilized at the end of each day.

38. Stabilize the disturbed areas on the site with a minimum of six inches of topsoil, permanently seed and mulch. A slope protection blanket shall be installed where shown on the plan.

39. No more than 15,000 square feet of disturbed area shall reach final grade before initiating seeding and mulching operations on areas proposed to be lawn areas.

40. Pave areas shown on the plans and stabilize any disturbed areas any time after this step.

41. After upslope areas are stabilized (a minimum of 70% uniform perennial vegetative cover), install Rain Garden 3. **A Licensed Professional Engineer shall be present for this step.**
 - o Any sediment entering the BMP shall be removed with light equipment. The underlying soil shall be scarified a minimum of twelve inches with a York rake, rototiller or other suitable equipment. **A licensed professional shall provide oversight during the scarifying of the subgrade.**
 - o The topsoil shall be stripped and be placed where shown on the plan.
 - o Excavate the berm and place and compact the fill for the berm. The structural soil shall be placed where shown on the plan.
 - o Install the outlet structure and outlet pipe. **A Licensed Professional shall provide oversight during the backfilling of the outlet pipe.**
 - o Stabilize the entire outside of the berm and on the inside of the berm with topsoil.
 - o Immediately apply the permanent seeding and mulch for the entire area. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1.
 - o Install amended topsoil, per the procedure outlined on the plans, on the inside of the infiltration basin, permanently seeded and mulched. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1.

Lot 4

42. Install the Rock Construction Entrance, clear and grub as needed.

43. Install the Compost Filter Socks 6-9 in the locations shown on the plan.

44. Clear and grub for all disturbed areas.

45. Begin construction of the Sediment Trap 2 using the following procedure:

- Grub the Sediment Trap area.
- The topsoil shall be stripped and be placed in the areas designated on the plan.
- Excavate the berm and place and compact the fill for the berm. The structural soil shall be placed where shown on the plan.
- Install and backfill the outlet structure and outlet pipe from the end section to the outlet structure starting at the downstream end and working uphill. Immediately install the anti-seep collars. The permanent outlet structure shall be installed in the Sediment trap. The temporary riser extension and trash rack shall be installed at this time. The grate shall not be installed on the outlet structure at this time. **A licensed Professional shall provide oversight during the backfilling of the outlet pipe.**
- Install the cleanout stake and mark the sediment cleanout elevation on the stake.
- Stabilize the entire outside of the berm with amended soils and on the inside of the sediment trap above the cleanout elevation with topsoil.
- Immediately apply the permanent seeding and mulch for the entire outside of the berm and above the sediment cleanout elevation on the inside of the basin. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1. The emergency spillway shall have the North American Green Blanket P300 installed.

46. Strip topsoil, stockpile and immediately stabilize with temporary seed and mulch.

47. Install the concrete washout area where shown on the Erosion Control Plans per the details for the Filtrrex® Filter Ring prior to starting any concrete work on the site.

48. The house, driveway, and site grading may begin using the following procedure:

- The contractor shall ensure that the runoff from all possible earth disturbance activities shall constantly be directed towards compost filter socks.
- Remove and grub the root material.
- Strip the topsoil from the proposed disturbed area.
- Place the topsoil where shown on the plan and seed and mulch the area.
- Place fill and compact to proposed grades starting downhill working uphill.
- The subgrade shall be rolled and the stone placed where shown on the plan for the driveway.
- Begin house construction. Excavated material shall be placed on the subsoil stockpile, seeded, and mulched.
- Begin installing the utilities using the following procedure. The utility lines may be installed simultaneously if desired by the O/RP:
 - o The sewer laterals.
 - o The water service line.
 - o The gas, electric, telephone and cable lines, if proposed, shall be installed. The open trenches shall be backfilled and stabilized at the end of each day.

49. Stabilize the disturbed areas on the site with a minimum of six inches of topsoil, permanently seed and mulch. A slope protection blanket shall be installed where shown on the plan.

50. No more than 15,000 square feet of disturbed area shall reach final grade before initiating seeding and mulching operations on areas proposed to be lawn areas.

51. Pave areas shown on the plans and stabilize any disturbed areas any time after this step.

52. After upslope areas are stabilized (a minimum of 70% uniform perennial vegetative cover), install MRC 4. **A Licensed Professional Engineer shall be present for this step.**
 - o Any sediment entering the BMP shall be removed with light equipment. The underlying soil shall be scarified a minimum of twelve inches with a York rake, rototiller or other suitable equipment. **A licensed professional shall provide oversight during the scarifying of the subgrade.**
 - o The topsoil shall be stripped and be placed where shown on the plan.
 - o Excavate the berm and place and compact the fill for the berm. The structural soil shall be placed where shown on the plan.
 - o Install the outlet structure and outlet pipe. **A Licensed Professional shall provide oversight during the backfilling of the outlet pipe.**
 - o Stabilize the entire outside of the berm and on the inside of the berm with topsoil.
 - o Immediately apply the permanent seeding and mulch for the entire area. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1.
 - o Install amended topsoil, per the procedure outlined on the plans, on the inside of the infiltration basin, permanently seeded and mulched. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1.

53. Install landscaping and trees in areas of lawn shown on the plans using light tracked equipment. Do not run equipment over areas of soil amendment to avoid compaction. Stabilize all disturbed areas with seed and mulch.

Lot 5

54. Install the Rock Construction Entrance, clear and grub as needed.

55. Install the Compost Filter Socks 10-15 in the locations shown on the plan.

56. Clear and grub for all disturbed areas.

57. Begin construction of the Sediment Trap 3 using the following procedure:

- Grub the Sediment Trap area.
- The topsoil shall be stripped and be placed in the areas designated on the plan.
- Excavate the berm and place and compact the fill for the berm. The structural soil shall be placed where shown on the plan.
- Install and backfill the outlet structure and outlet pipe from the end section to the outlet structure starting at the downstream end and working uphill. Immediately install the anti-seep collars. The permanent outlet structure shall be installed in the Sediment trap. The temporary riser extension and trash rack shall be installed at this time. The grate shall not be installed on the outlet structure at this time. **A licensed Professional shall provide oversight during the backfilling of the outlet pipe.**
- Install the cleanout stake and mark the sediment cleanout elevation on the stake.
- Stabilize the entire outside of the berm with amended soils and on the inside of the sediment trap above the cleanout elevation with topsoil.
- Immediately apply the permanent seeding and mulch for the entire outside of the berm and above the sediment cleanout elevation on the inside of the basin. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1. The emergency spillway shall have the North American Green Blanket P300 installed.

58. Strip topsoil, stockpile and immediately stabilize with temporary seed and mulch.

59. Install the concrete washout area where shown on the Erosion Control Plans per the details for the Filtrrex® Filter Ring prior to starting any concrete work on the site.

60. The house, driveway, and site grading may begin using the following procedure:

- The contractor shall ensure that the runoff from all possible earth disturbance activities shall constantly be directed towards compost filter socks.
- Remove and grub the root material.
- Strip the topsoil from the proposed disturbed area.
- Place the topsoil where shown on the plan and seed and mulch the area.
- Place fill and compact to proposed grades starting downhill working uphill.
- The subgrade shall be rolled and the stone placed where shown on the plan for the driveway.
- Begin house construction. Excavated material shall be placed on the subsoil stockpile, seeded, and mulched.
- Begin installing the utilities using the following procedure. The utility lines may be installed simultaneously if desired by the O/RP:
 - o The sewer laterals.
 - o The water service line.
 - o The gas, electric, telephone and cable lines, if proposed, shall be installed. The open trenches shall be backfilled and stabilized at the end of each day.

61. Stabilize the disturbed areas on the site with a minimum of six inches of topsoil, permanently seed and mulch. A slope protection blanket shall be installed where shown on the plan.

62. No more than 15,000 square feet of disturbed area shall reach final grade before initiating seeding and mulching operations on areas proposed to be lawn areas.

63. Pave areas shown on the plans and stabilize any disturbed areas any time after this step.

64. After upslope areas are stabilized (a minimum of 70% uniform perennial vegetative cover), install MRC 5. **A Licensed Professional Engineer shall be present for this step.**
 - o Any sediment entering the BMP shall be removed with light equipment. The underlying soil shall be scarified a minimum of twelve inches with a York rake, rototiller or other suitable equipment. **A licensed professional shall provide oversight during the scarifying of the subgrade.**
 - o The topsoil shall be stripped and be placed where shown on the plan.
 - o Excavate the berm and place and compact the fill for the berm. The structural soil shall be placed where shown on the plan.
 - o Install the outlet structure and outlet pipe. **A Licensed Professional shall provide oversight during the backfilling of the outlet pipe.**
 - o Stabilize the entire outside of the berm and on the inside of the berm with topsoil.
 - o Immediately apply the permanent seeding and mulch for the entire area. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1.
 - o Install amended topsoil, per the procedure outlined on the plans, on the inside of the infiltration basin, permanently seeded and mulched. A slope protection blanket shall be installed where shown on the plan and all slopes greater than 3:1.

65. Install landscaping and trees in areas of lawn shown on the plans using light tracked equipment. Do not run equipment over areas of soil amendment to avoid compaction. Stabilize all disturbed areas with seed and mulch.

66. When all of the disturbances on the site are completely stabilized (a minimum of 70% uniform perennial vegetative cover), all temporary BMP's should be removed from the site and any disturbance created when removing them shall immediately be permanently seeded and mulched. Compost filter socks shall be split open and the compost distributed in landscaped areas of the site.

Within 30 days after the completion of earth disturbance activities authorized by this permit, including the permanent stabilization of the site and proper installation of PCSM BMP's in accordance with the approved PCSM Plan, or upon submission of the NOT if sooner, the permittees shall file with the Montgomery County Conservation District a statement signed by a licensed professional and by the permittees certifying that the work has been performed in accordance with the terms and conditions of this permit and the approved E&S and PCSM Plans. Completion certificates are needed to ensure that all work is performed in accordance with the terms and conditions of the permit and the approved E&S and PCSM Plans.

XI. 102.4(b)(5)(x) - A maintenance program which provides for inspection of BMP's on a weekly basis and after each measurable rainfall event, including the repair of the BMP's to ensure effective and efficient operation.

Maintenance Program

1. The O/RP shall be responsible for the installation and maintenance of all erosion control facilities.

2. All erosion control facilities shall be inspected after each rainfall event and weekly to ensure that they are in good repair and in working condition. Any damaged facility shall be repaired immediately.

3. Seeded areas that have eroded shall be filled and graded as necessary and then reseeded and mulched.

4. The inspections and maintenance shall continue after each sizable storm event until signs of erosion are gone. Inspections and necessary cleaning and maintenance shall be performed monthly thereafter.

5. A log showing dates that E&S BMPs were inspected as well as any deficiencies found and the date they were corrected shall be maintained on the site and be made available to regulatory agency officials at the time of inspection.

6. E&S BMPs shall remain functional as such until all areas tributary to them are permanently stabilized or until they are replaced by another BMP approved by the Montgomery County Conservation District.

7. The silt that has accumulated shall be removed from the erosion control structure, allowed to dry and then it can be used as fill where needed on the site. Inspect the rock filter outlets and compost filter socks weekly and after each storm event. The filter material shall be cleaned and/or replaced if it is clogged.

8. The vegetation shall be mowed as necessary to maintain a neat appearance and discourage weed growth. The local ordinances shall be followed.

9. Any trash that is removed from the erosion control structures shall be disposed in accordance with local, state and federal regulations. The installation and maintenance of the temporary control facilities will be the responsibility of the O/RP. The temporary controls will be maintained in accordance with the Pennsylvania Department of Environmental Protection regulations.

10. The Pennsylvania Department of Environmental Protection regulations require a 70% uniform erosion resistant perennial vegetative cover or other permanent non-vegetative cover with a density sufficient to resist accelerated erosion over all disturbed areas established before the site is considered permanently stabilized. Cut and fill slopes shall be capable of resisting failure due to slumping, sliding, or other movements. Until such time as the standard is achieved, interim stabilization and temporary erosion and sedimentation control measures and facilities that are used to treat the runoff shall remain in place.

11. The O/RP is responsible for removing the temporary erosion controls after the site is permanently stabilized with vegetation. The O/RP shall stabilize any areas disturbed during the removal of the erosion control facilities.

12. After the site is permanently stabilized, the property owner shall periodically check the graded areas and swales for any developing erosion problems. Any damaged areas shall be repaired immediately.

XII. 102.4(b)(5)(x) - Procedures which ensure that the proper measures for the recycling or disposal of materials associated with or from the project site will be undertaken in accordance with Department regulations.

The site will not be used to store any chemicals, solvents or other hazardous waste or materials with the potential to cause accidental pollution during earth disturbance activities. Project construction waste will be sediment from the site and associated construction building materials. Sediment removed from the erosion control measures/facilities shall be disposed of in landscaped areas outside of steep slopes, wetlands, floodplains and drainage swales and immediately stabilized or placed on topsoil stockpiles. Waste building materials will be removed from the site by a licensed hauler and either recycled or disposed of according to State and Federal Regulations.

No material may be removed from this project without an erosion control plan approved by the local conservation district for the disposal site.

Temporary and permanent control measures and facilities must be maintained during the progress of the work at the site. This will be done by implementing a program of proper disposal of materials and frequent removal of solid materials from the erosion control facilities.

If the site will need to import or export material from the site, the responsibility for performing environmental due diligence and determination of clean fill will rest with the operator.

Clean Fill is defined as: Uncontaminated, non-water soluble, non-decomposable, inert, solid material. The term includes soil, rock, stone, dredged material, used asphalt, and brick, block or concrete from construction and demolition activities that is separate from other waste and is recognizable as such. The term does not include materials placed in or on the waters of the Commonwealth unless otherwise authorized. (The term "used asphalt" does not include milled asphalt or asphalt that has been processed for re-use).

Clean Fill affected by a spill or release of a regulated substance: Fill materials affected by a spill or release of a regulated substance still qualifies as clean fill provided the testing reveals that the fill material contains concentrations of regulated substances that are below the residential limits in Tables FP-1a and FP-1b found in the Department's policy "Management of Fill".

Any person placing clean fill that has been affected by a spill or release of a regulated substance must use form FP-001 to certify the origin of the fill material and the results of the analytical testing to qualify the material as clean fill. Form FP-001 must be retained by the owner of the property receiving the fill.

Environmental due diligence: The applicant must perform environmental due diligence to determine if the fill materials associated with the project qualify as clean fill. Environmental due diligence is defined as: *Investigative techniques, including, but not limited to, visual property inspections, electronic data base searches, review of property ownership, review of property use history, Sanborn maps, environmental questionnaires, transaction screens, analytical testing, environmental assessments or audits. Analytical testing is not a required part of due diligence unless visual inspection and/or review of the past land use of the property indicates that the fill may have been subjected to a spill or release of regulated substance. If the fill may have been affected by a spill or release of a regulated substance, it must be tested to determine if it qualifies as clean fill. Testing should be performed in accordance with Appendix A of the Department's policy "Management of Fill".*

Fill material that does not qualify as clean fill is regulated fill. Regulated fill is waste and must be managed in accordance with the Department's municipal or residual waste regulations based on 25 Pa. Code Chapters 287 Residual Waste Management or 271 Municipal Waste Management, whichever is applicable. These regulations are available on-line at www.pascode.com.


XIII. 102.4 (b)(5)(iii) Identification of the naturally occurring geologic formations or soil conditions that may have the potential to cause pollution during earth disturbance activities and include BMPs to avoid or minimize potential pollution and its impacts from the formations.



There are no naturally occurring geologic formations or soil conditions with the potential to cause pollution during earth disturbance. The soils have a potential for erosion, the erosion from the soils could potentially cause water pollution. To minimize this potential risk, the erosion and sediment control BMPs mentioned above are to be provided.

XIV. 102.4(b)(5)(iii) Identification of potential thermal impacts to surface waters from the earth disturbance activity including BMPs to avoid, minimize or mitigate potential pollution from thermal impacts.

The potential for thermal impacts is present due to storm water flows over impervious areas. This impact is mitigated through the disconnection impervious areas, such as roofs, by directing them to the infiltration basins, rain garden, vegetated areas, and across shaded and pervious areas.

NO.	REVISION	DATE	BY	APP.
2.	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB
1.	REVISED PER PENNOM REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB

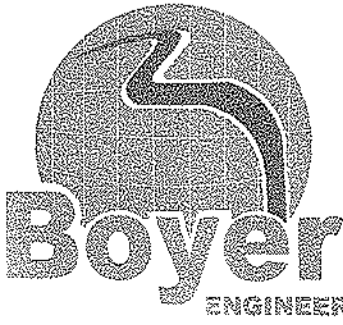CLIENT		SUBJECT	
R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465		EROSION AND SEDIMENTATION CONTROL NARRATIVE	
		KELLY ACRES	
		DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA	
SEAL		PROJECT NO. 20-374A	
		DWC. NO. ES620374A	
		SHEET NO. 14 OF 17	
		1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538	
DESIGN	BDB	CHKD. BY	BDB
DRAWN BY	WJD	CHKD. BY	
DATE	2020-09-04	SCALE	NOT TO SCALE

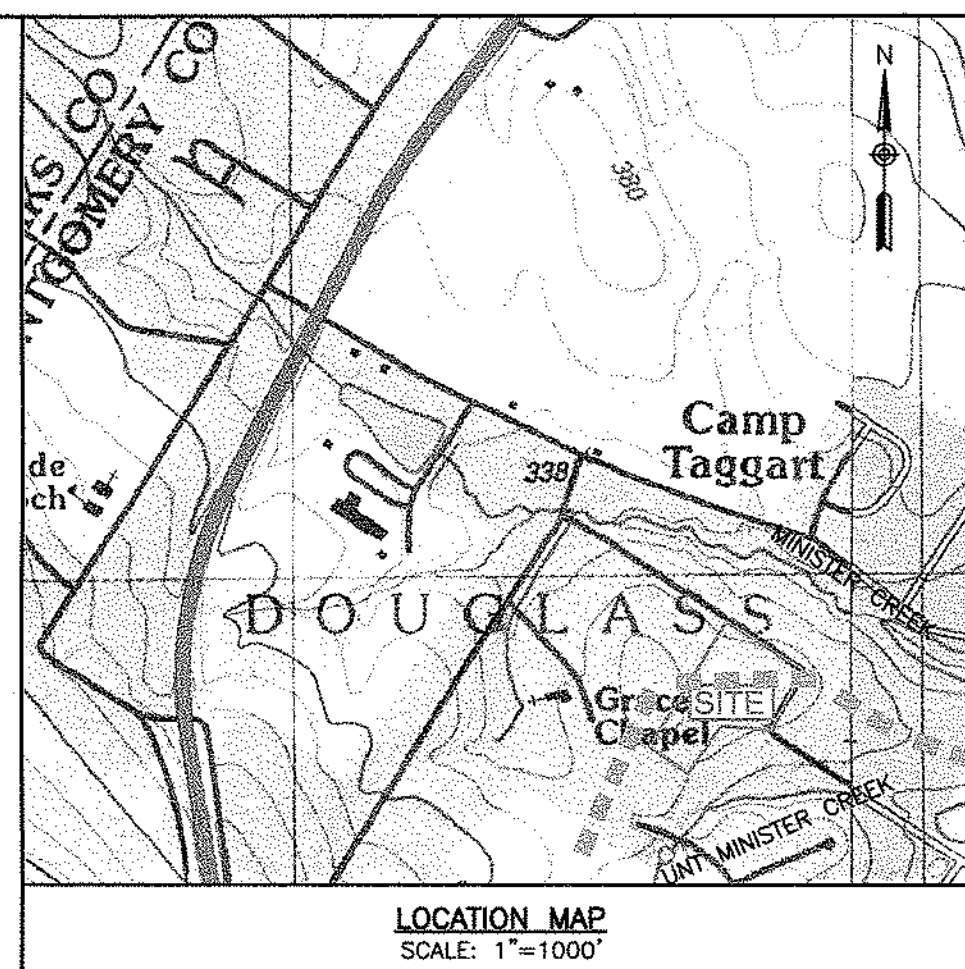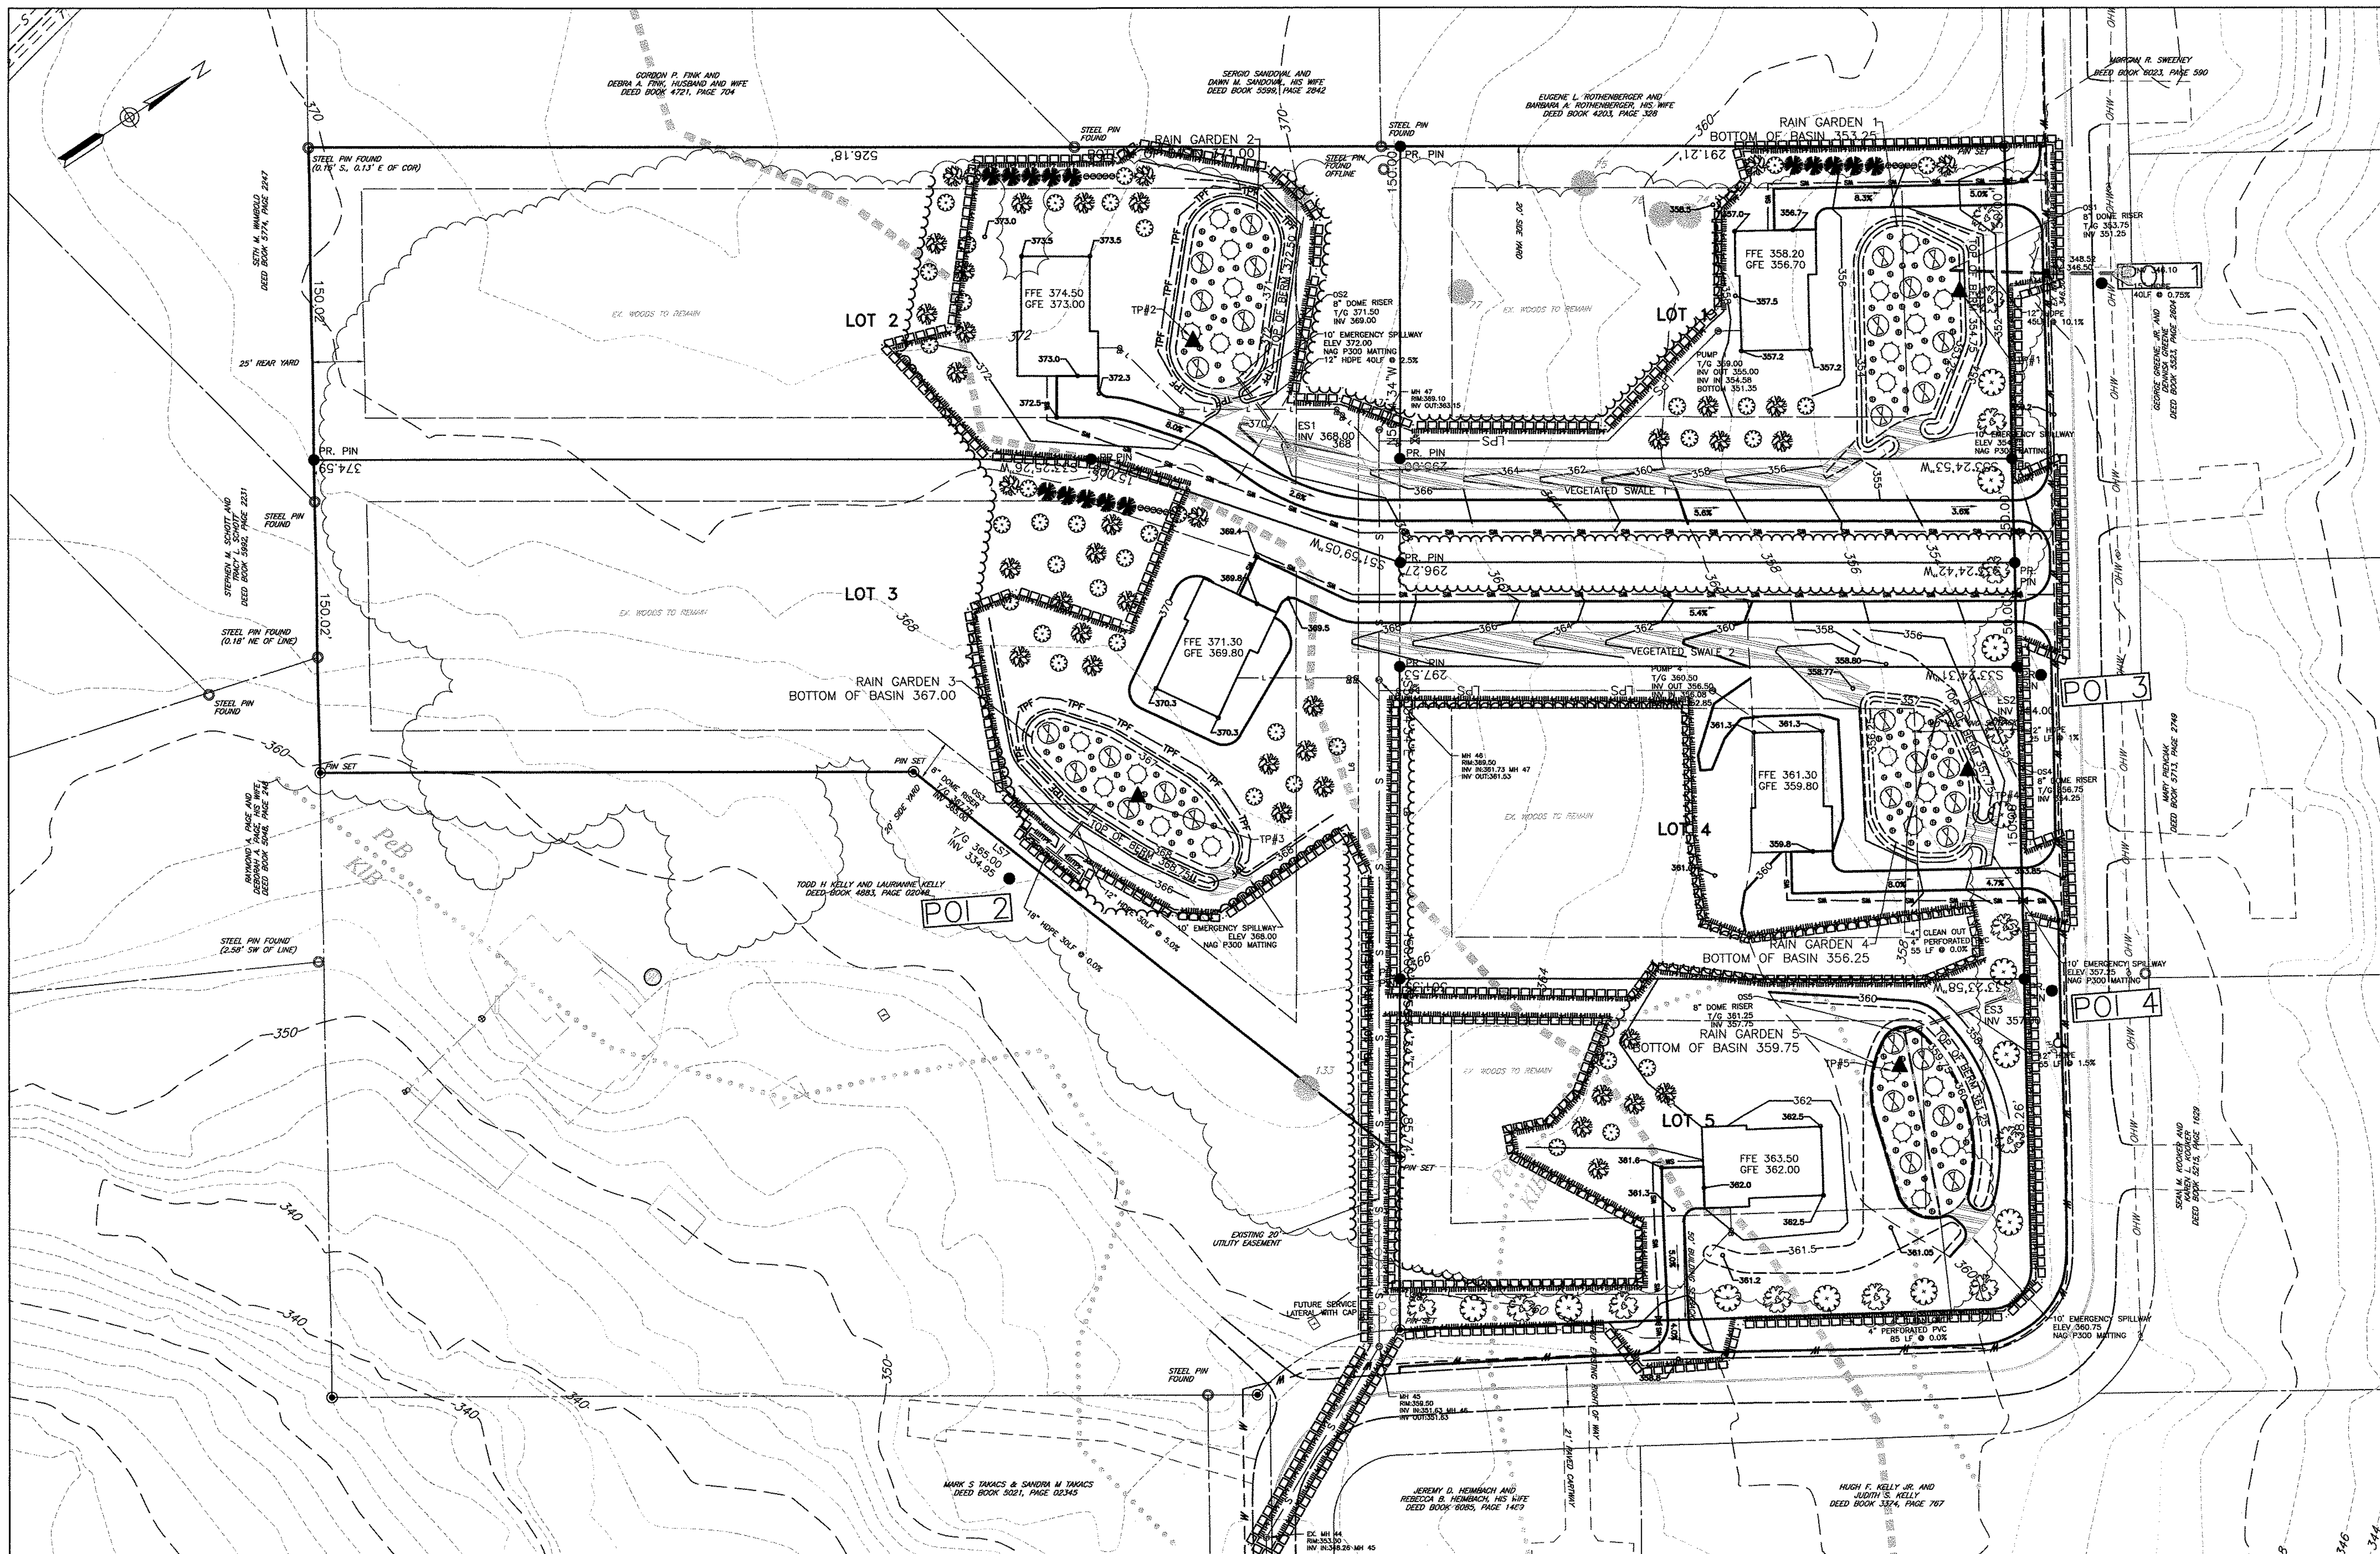

LEGEND

- EX. TRACT LINE
- EX. BOUNDARY
- EX. RIGHT-OF-WAY
- SETBACKS
- EX. SANITARY
- EX. MONUMENTATION
- EX. UTILITY POLE & GUY WIRE
- EX. OVERHEAD WIRES
- EX. SANITARY MANHOLE
- EX. TREELINE
- EX. SOILS
- EX. CONTOURS
- PR. CONTOURS
- INFILTRATION TEST PIT
- PR. EDGE OF PAVING
- PR. BUILDING
- PR. WATER SERVICE
- PR. SEWER LATERAL
- PR. FORCE MAIN
- PR. SANITARY SEWER
- PR. STORMWATER PIPE
- PR. SPILLWAY/CHANNEL LINING
- PR. RIP RAP
- PR. SEWER MANHOLE
- PR. SEWER CLEANOUT
- PR. SEWER SHUTOFF
- PR. WATER VALVE
- PR. TREES
- NPDES BOUNDARY
- WATERSHED
- PR. ELEVATION

RAIN GARDEN SCHEDULE

SYMBOL	SPECIES	QUANTITY	SIZE	RG1	RG2	RG3	RG4	RG5
⊙	EASTERN REDBUD, CERIS CANADENSIS	28	MIN 2.5" CAL / B&B	7	6	5	5	5
⊙	FLOWERING DOGWOOD, CORNUS FLORIDA	31	MIN 2.5" CAL / B&B	7	6	6	6	6
⊙	INKBERRY HOLLY, ILEX GLABRA	133	MIN 18" HT	32	27	25	23	26


LANDSCAPE SCHEDULE

SYMBOL	NAME	QUANTITY	NATIVE	ROOT	SIZE
⊙	RED MAPLE, ACER RUBRUM	15	Y	B&B	MIN 2.5" CAL
⊙	WHITE ASH, FRAXIUS AMERICANA	50	Y	B&B	MIN 2.5" CAL
⊙	EASTERN WHITE PINE, PINUS STROBUS	15	Y	B&B	MIN 2.5" CAL
⊙	PIN OAK, QUERCUS PALUSTRIS	40	Y	B&B	MIN 2.5" CAL
⊙	INKBERRY HOLLY, ILEX GLABRA	15	Y	HT	MIN 18"

SOILS TABLE

SYMBOL	NAME/DESC
PeB	PENN SILT LOAM, 3 TO 8 PERCENT SLOPES
KB	KUNESVILLE CHANNERY SILT LOAM, 3 TO 6 PERCENT SLOPES


LIMIT OF DISTURBANCE 4.06 ACRES

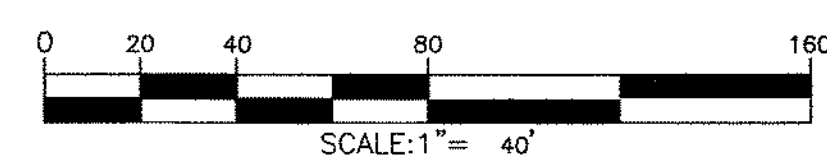

CLIENT	R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465	SUBJECT	POST CONSTRUCTION STORMWATER MANAGEMENT PLAN	
		KELLY ACRES		
		DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA		
SEAL		1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538		
DESIGN		BOB	CHKD. BY	BOB
DRAWN BY		WJD	CHKD. BY	
DATE		2020-09-04	SCALE	1"=40'
PROJECT NO.		20-374A		
DRAWING NO.		PC120374A		
SHEET NO.		15 OF 17		


NO.	REVISION	DATE	BY	APP.
2.	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB
1.	REVISED PER PENNDOT REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB

PROJECT: 20-374A Kelly Ashley Customs - Kelly Ashley Customs, LLC - 08-18-22 12:03:33
 P:\PROJECTS\20-374A Kelly Ashley Customs - Kelly Ashley Customs, LLC - 08-18-22 12:03:33

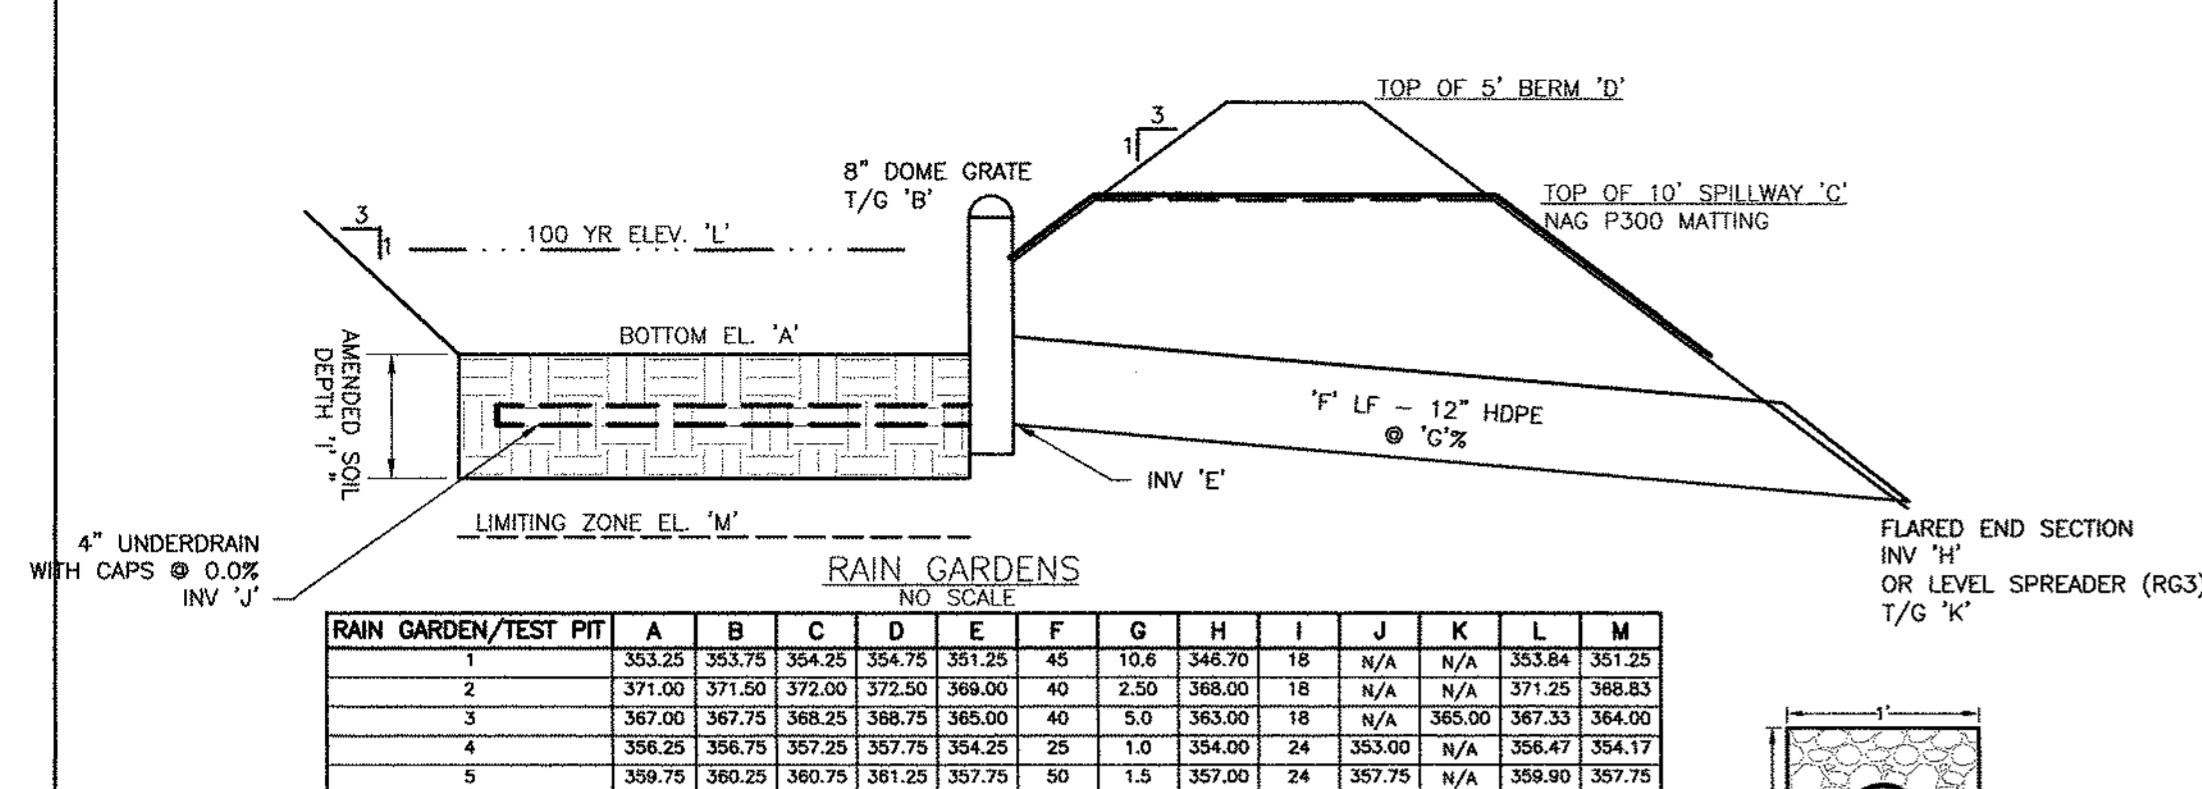

RAIN GARDEN/TEST PIT	A	B	C	D	E	F	G	H	I	J	K	L	M
1	333.25	353.75	354.25	354.75	355.25	45	10.6	346.70	18	N/A	N/A	353.84	357.25
2	371.00	371.50	372.00	372.50	373.00	40	2.50	368.00	18	N/A	N/A	371.25	368.83
3	367.00	367.50	368.00	368.50	369.00	40	5.0	363.00	18	N/A	365.00	367.53	364.00
4	356.25	356.75	357.25	357.75	358.25	25	1.0	354.00	24	353.00	N/A	356.47	354.17
5	359.75	360.25	360.75	361.25	361.75	50	1.5	357.00	24	357.75	N/A	359.90	357.75



- NOTES FOR RAIN GARDEN AND INFILTRATION BASINS:**
- ALL BASIN EMBANKMENTS SHALL BE PLACED AT A MAXIMUM OF EIGHT (8') LIFTS TO A MINIMUM OF 95% OF MAXIMUM DRY DENSITY AS ESTABLISHED BY ASTM D-1557. PRIOR TO PROCEEDING TO THE NEXT LIFT, THE COMPACTION SHALL BE CHECKED BY THE TOWNSHIP ENGINEER. THE DEVELOPER'S CONTRACTOR SHALL OBTAIN THE SERVICES OF A QUALIFIED LABORATORY TECHNICIAN TO CONDUCT COMPACTION TESTS ON THE LEADING AND THE TRAILING EDGE OF THE BERM ALONG WITH THE TOP OF THE BERM. ALL TEST SHALL BE FURNISHED TO THE TOWNSHIP FOR REVIEW.
 - A CLAY CORE SHALL BE PROVIDED FOR THE BERM WITH A TOP ELEVATION AT THE PRINCIPAL SPILLWAY ELEVATION. MINIMUM TOP WIDTH OF 2' AND SIDE SLOPE OF 1:1.
 - A KEY TRENCH SHALL BE PROVIDED UNDER FILL EMBANKMENTS. THE KEY TRENCH SHALL BE A MINIMUM OF 8' WIDE, 2' BELOW EXISTING GRADE, WITH SIDE SLOPES OF 1:1.
- MAINTENANCE:**
- THE OVERLYING VEGETATION OF SUBSURFACE INFILTRATION FEATURES SHOULD BE MAINTAINED IN GOOD CONDITION, AND ANY BARE SPOTS RE-VEGETATED AS SOON AS POSSIBLE.
 - VEHICULAR ACCESS ON SUBSURFACE INFILTRATION AREAS SHOULD BE PROHIBITED, AND CARE SHOULD BE TAKEN TO AVOID EXCESSIVE COMPACTION BY MOWERS. IF ACCESS IS NEEDED, USE OF PERMEABLE, TURF REINFORCEMENT SHOULD BE CONSIDERED.

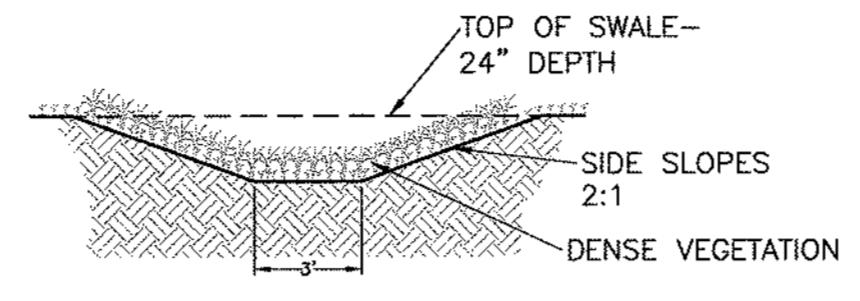

SEED SWALE AREA WITH ERNST SEED MIX ERNMX-183(OR EQUAL) AT 15#/AC AND OVERSEED WITH ANNUAL RYE AT 30#/AC

VEGETATED SWALE CROSS SECTION NO SCALE

CHANNEL NO.	STATIONS	BOTTOM WIDTH B (FT)	DEPTH D (FT)	TOP WIDTH W (FT)	Z1 (FT)	Z2 (FT)	LINING *
1	N/A	2	2	10	2	2	N.A.G. S7S
2	N/A	2	2	10	2	2	N.A.G. S7S

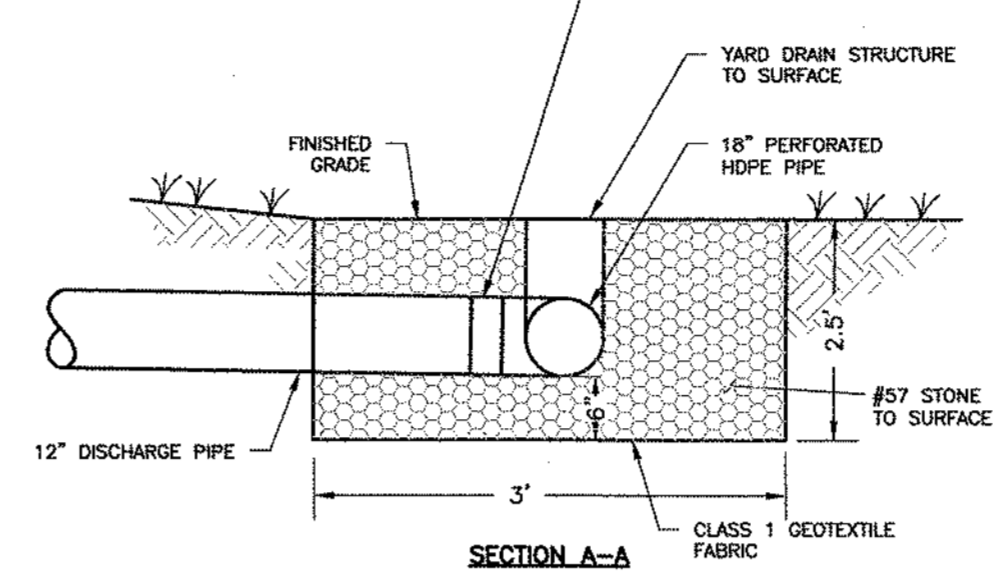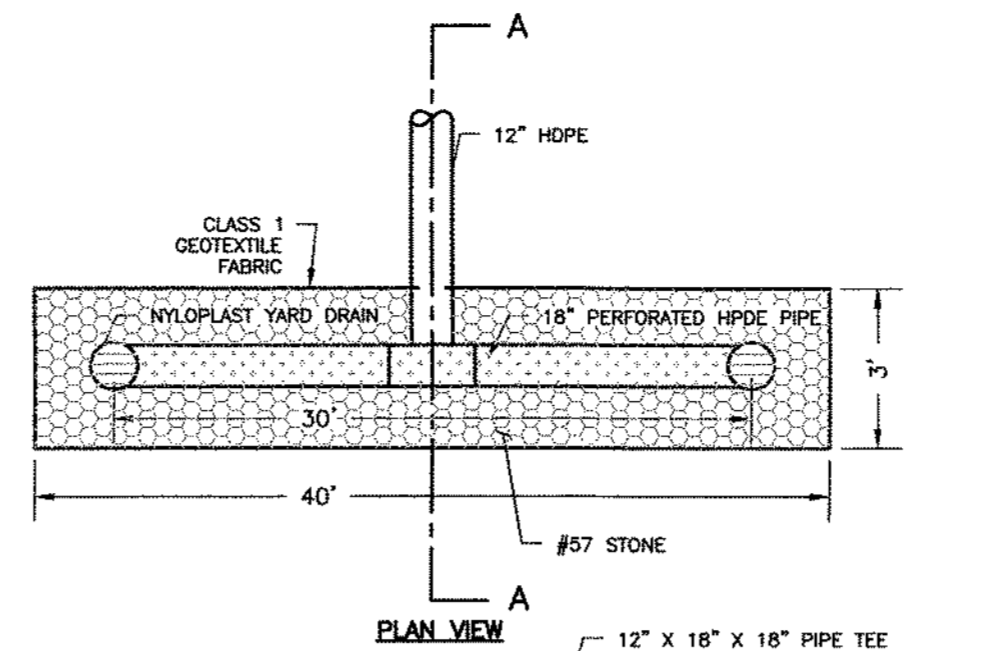

- NOTES**
- SPREADER IS TO BE 30' IN LENGTH.
 - OUTLET PIPE IS TO BE TERMINATED IN "TEE" COUPLING.
 - YARD DRAIN BASINS OR INLINE COUPLINGS SHALL BE USED WITH SURFACE GRATES AT EACH OF THE PERFORATED PIPE TO THE SURFACE.

LEVEL SPREADER DETAIL (LS7) NO SCALE

LEVEL SPREADER DRAIN

NYLOPLAST 18" INLINE DRAIN: 2718AG __ X

ADAPTER SIZE

Adapter Size	B
6"	14.00
8"	14.00
10"	14.00
12"	14.00
15"	13.50
18"	8.25

TRAFFIC LOADS: CONCRETE SLAB DIMENSIONS ARE FOR GUIDELINE PURPOSES ONLY. ACTUAL CONCRETE SLAB MUST BE DESIGNED TAKING INTO CONSIDERATION LOCAL SOIL CONDITIONS, TRAFFIC LOADING, & OTHER APPLICABLE DESIGN FACTORS. SEE DRAWING NO. 7001-110-111 FOR NON TRAFFIC INSTALLATION.

THE BACKFILL MATERIAL SHALL BE CRUSHED STONE OR OTHER GRANULAR MATERIAL MEETING THE REQUIREMENTS OF CLASS I, CLASS II, OR CLASS III MATERIAL AS DEFINED IN ASTM D2321. BEDDING & BACKFILL FOR SURFACE DRAINAGE INLETS SHALL BE PLACED & COMPACTED UNIFORMLY IN ACCORDANCE WITH ASTM D2321.


GRATE OPTIONS

Grate Options	Load Rating	Part #	Drawing #
PERFORATED	MEETS H-10	1899CGR	7001-110-212
STANDARD	MEETS H-20	1899CGR	7001-110-213
SOLID COVER	MEETS H-20	1899CGR	7001-110-214
SLOPE	N/A	1899CGR	7001-110-215
DROP IN GRATE	LIGHT DUTY	1899D	7001-110-216


1. GRATES/SOLID COVER SHALL BE DUCTILE IRON PER ASTM A536 GRADE 70-50-5.
2. FRAMES SHALL BE DUCTILE IRON PER ASTM A536 GRADE 70-50-5.
3. DRAINAGE CONNECTION STUB JOINT TIGHTNESS SHALL CONFORM TO ASTM D2321 FOR CORRUGATED HDPE (ADS N-12 HANCOR DUAL WALL, N-12 HP, & PVC SEWER).
4. DIMENSIONS ARE FOR REFERENCE ONLY. ACTUAL DIMENSIONS MAY VARY.
5. DIMENSIONS ARE IN INCHES.
6. SEE DRAWING NO. 7001-110-278 FOR ADS N-12 & HANCOR DUAL WALL BELL INFORMATION & DRAWING NO. 7001-110-284 FOR N-12 HP BELL INFORMATION.

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH NYLOPLAST HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM FOR THE DISCLOSURE TO OTHERS IS FORBIDDEN EXCEPT BY SPECIFIC WRITTEN PERMISSION FROM NYLOPLAST.


DRAWN BY: EBC **MATERIAL:** NYLOPLAST
DATE: 04-03-08
REVIEWED BY: NMH **PROJECT NO. NAME:**
DATE: 05-15-16
DWG. SIZE: A **SCALE:** 1:30 **SHEET:** 1 OF 1
DWG. NO.: 7003-119-027 **REV. E**

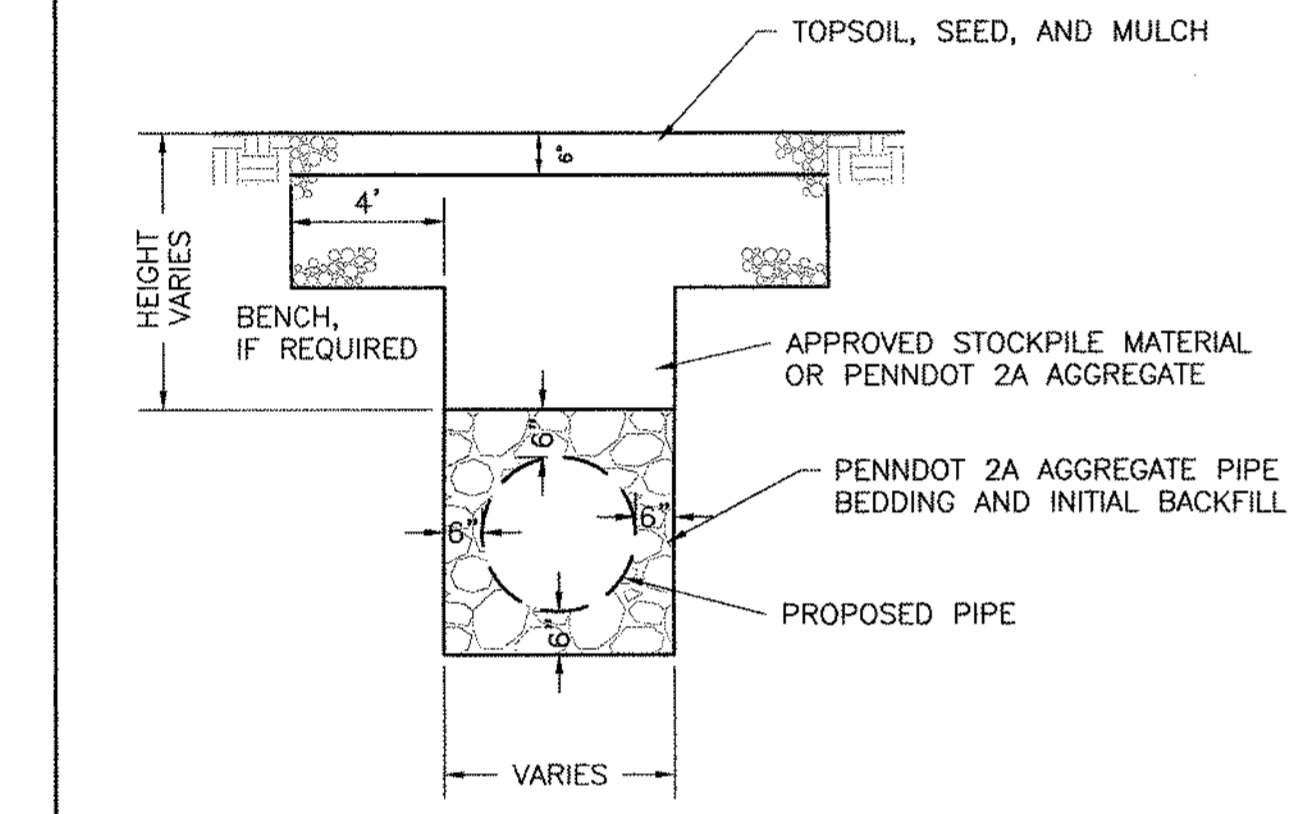



STORM SEWER TRENCH - TYP. BACKFILL DETAIL NO SCALE

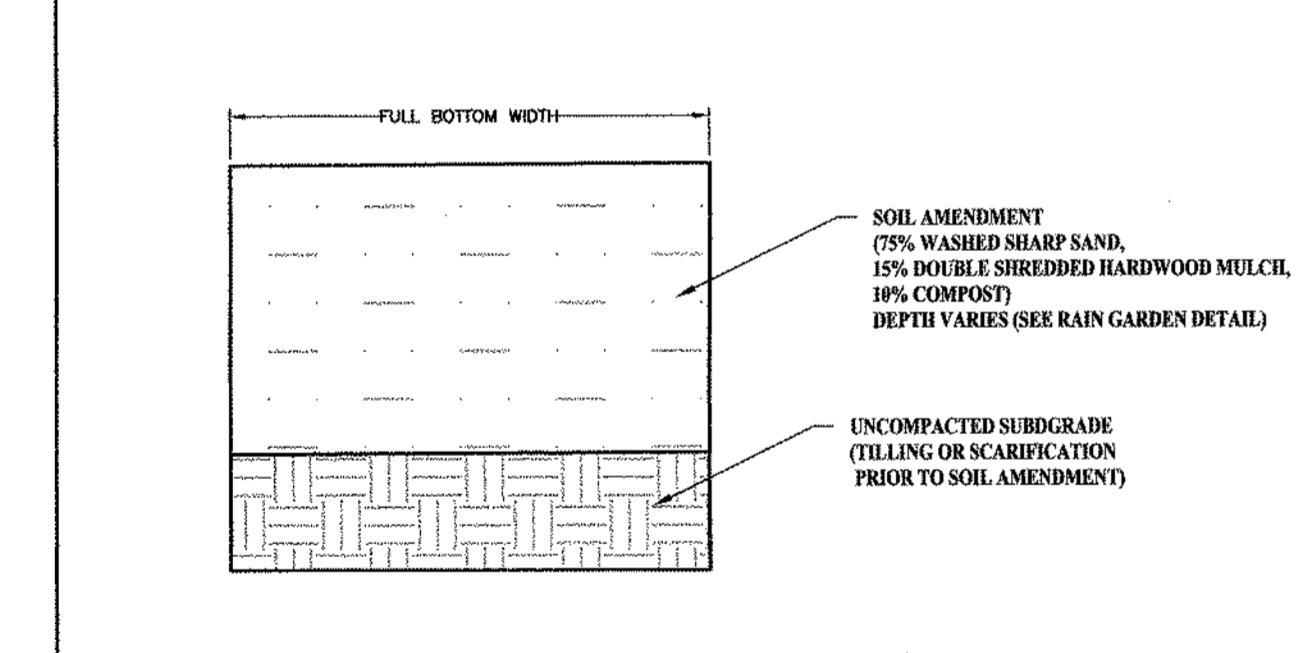

- CONSTRUCTION NOTES:**
- SOIL AMENDMENT CAN CONSIST OF COMPOST, MULCH AND SAND.
 - AMENDED SOILS SHALL NOT BE PLACED ON SLOPES GREATER THAN 4:1.
 - AMENDED SOILS SHALL NOT BE CONSTRUCTED WITHIN THE DRIP LINE OF EXISTING TREES.
 - PERMANENT PLANTING/SEEDING SHALL BE IMMEDIATELY INSTALLED ON THE SURFACE BY HAND TO MINIMIZE COMPACTION.

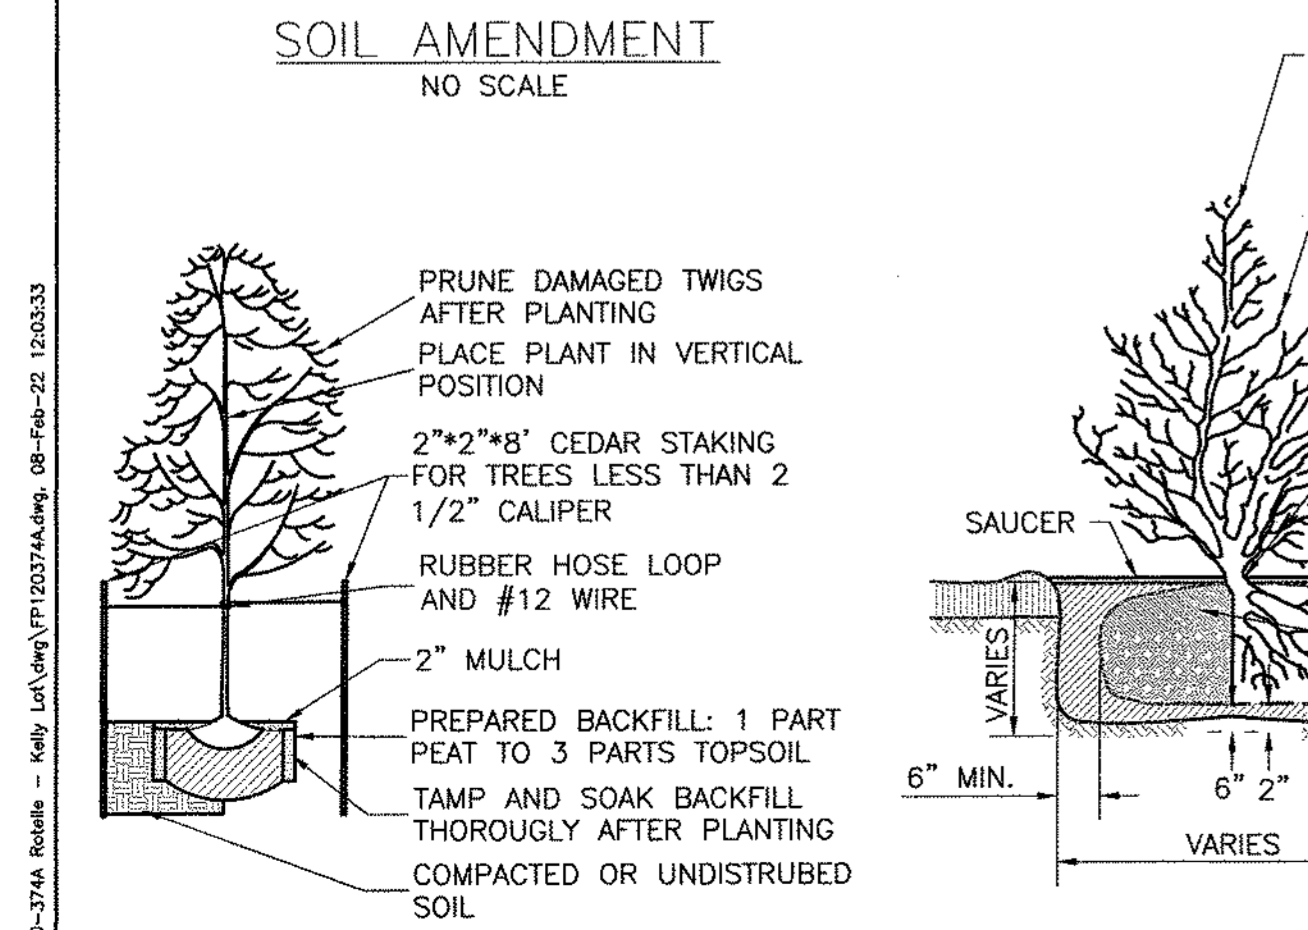


DECIDUOUS TREE PLANTING DETAIL NO SCALE

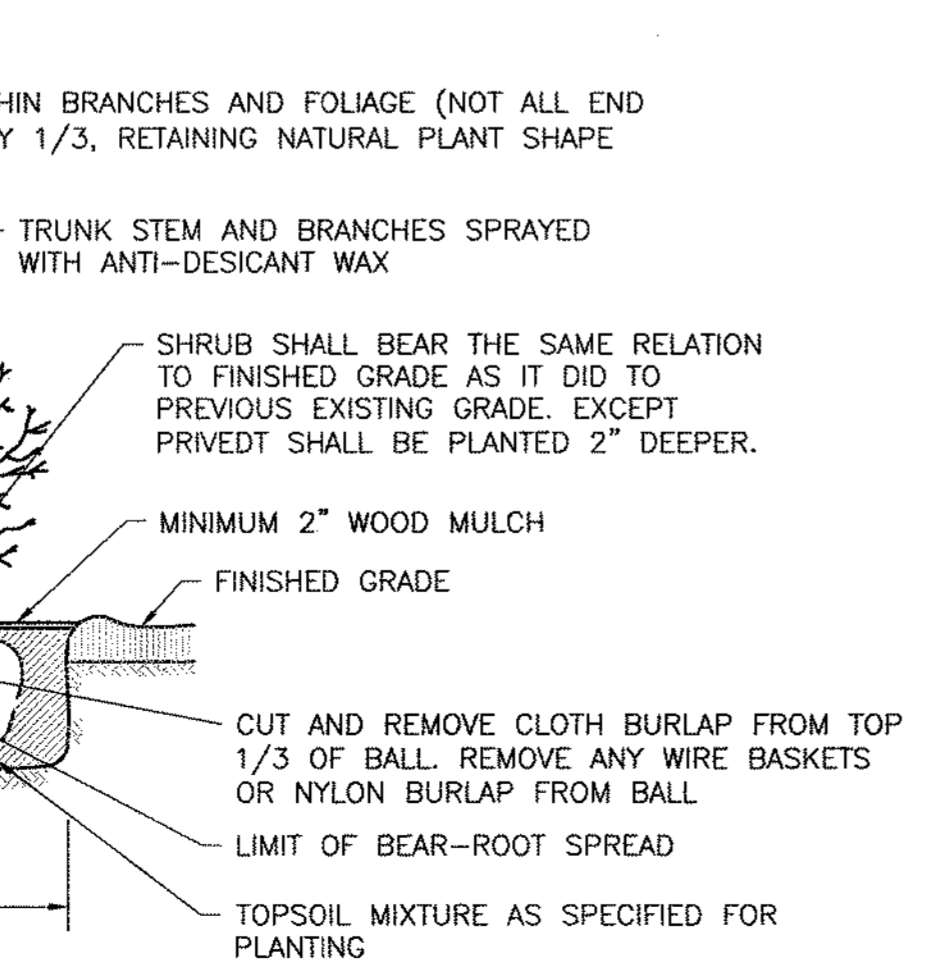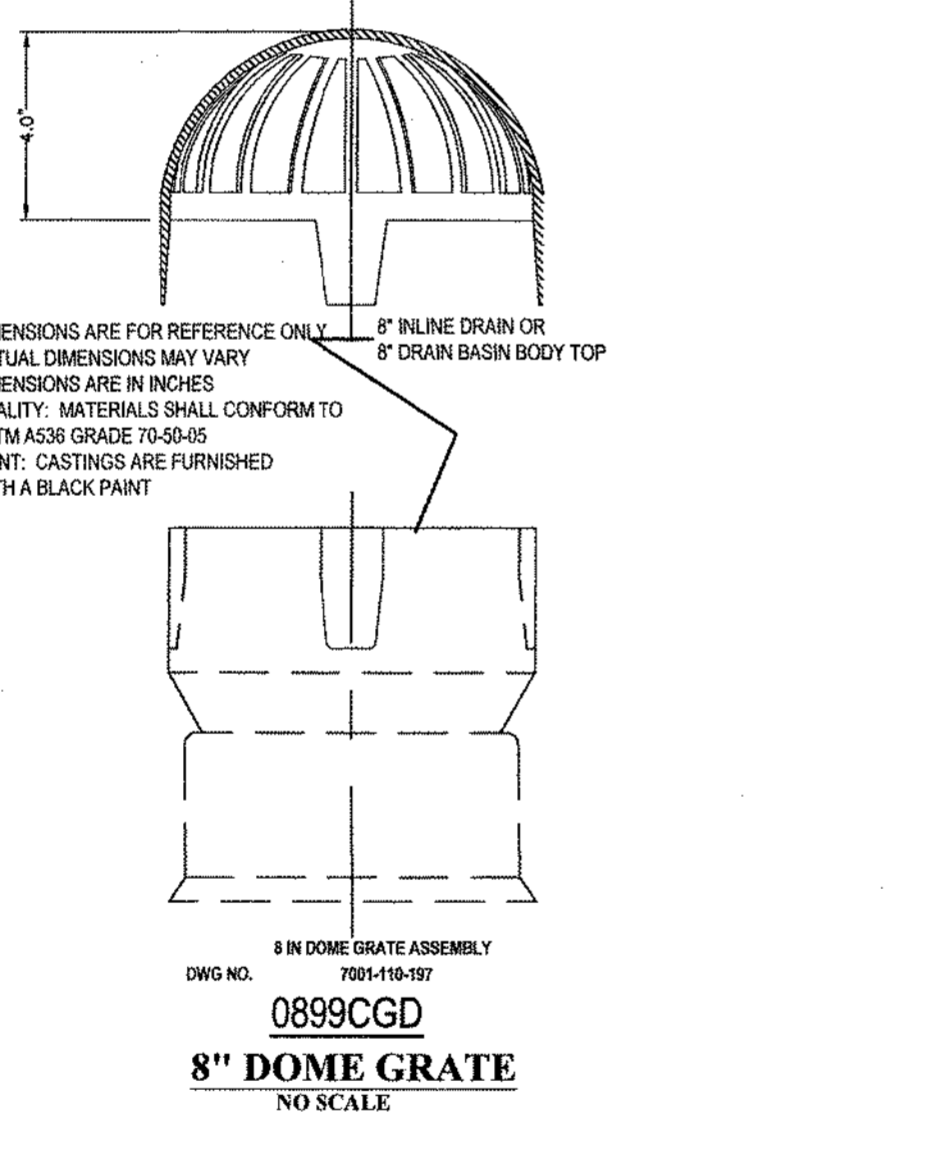

SHRUB PLANTING DETAIL BALLED OR BARE SHRUB-NO SCALE

- NOTES**
- PREPARE BEDDING: BEDDING MATERIAL AROUND THE END SECTION MAY BE THE SAME AS THE MATERIAL AROUND THE PIPE. PLACE A FEW INCHES OF BEDDING MATERIAL IN THE TRENCH OR DITCH WHERE THE END SECTION WILL BE PLACED. COMPACT AND CONTOUR THIS MATERIAL TO GENERALLY MATCH THE END SECTION; EXCAVATE AN AREA IN THE BEDDING WHERE THE TOE TROUGH WILL SEAT SO THAT THE END SECTION WILL ALIGN TO PROPER GRADE IN THE FINISHED INSTALLATION.
 - PLACE END SECTION ON PIPE: OPEN THE END SECTION COLLAR AND SEAT IT OVER THE LAST TWO PIPE CORRUGATIONS. ONCE THE END SECTION IS POSITIONED, CHECK TO MAKE SURE THE INVERT OF THE END SECTION MATCHES THE INVERT OF THE PIPE AND THAT THE END SECTION IS ALIGNED TO THE PROPER GRADE.
 - SECURE THE END SECTION: SLIP THE STAINLESS STEEL ROD THROUGH THE PRE-DRILLED HOLES AT THE TOP OF THE COLLAR. THE ROD SHOULD BE BETWEEN THE CROWNS OF THE TWO CORRUGATIONS AT THE END OF THE PIPE. PLACE A WASHER ON EITHER END OF THE ROD; PLACE A NUT ON EITHER END OF THE ROD AND HAND TIGHTEN WITH A WRENCH UNTIL THE COLLAR IS TIGHT AROUND THE PIPE. DO NOT OVER-TIGHTEN.
 - SECURE TOE TROUGH: TO PREVENT WASHOUTS FROM HIGH VELOCITY FLOW, IT IS RECOMMENDED THAT THE TOE TROUGH BE SECURED WITH CONCRETE. POUR CONCRETE IN THE TROUGH UP TO THE LEVEL OF THE TRENCH OR DITCH BOTTOM AND ALONG THE ENTIRE LENGTH OF THE TROUGH.
 - FINISH BACKFILL: SHOVEL BACKFILL AROUND THE END SECTION IN 6-TO 9-INCH LAYERS EQUALLY ON BOTH SIDES. KNIFING IT IN TO ELIMINATE VOIDS. TAMP WITH A SMALL-FACED COMPACTOR OR OTHER EQUIPMENT SUITABLE FOR SMALL AREAS. CONTINUE PLACING, KNIFING AND COMPACTING BACKFILL MATERIAL IN LAYERS TO THE TOP OF THE END SECTION TO SEAT IT WELL INTO THE BACKFILL.

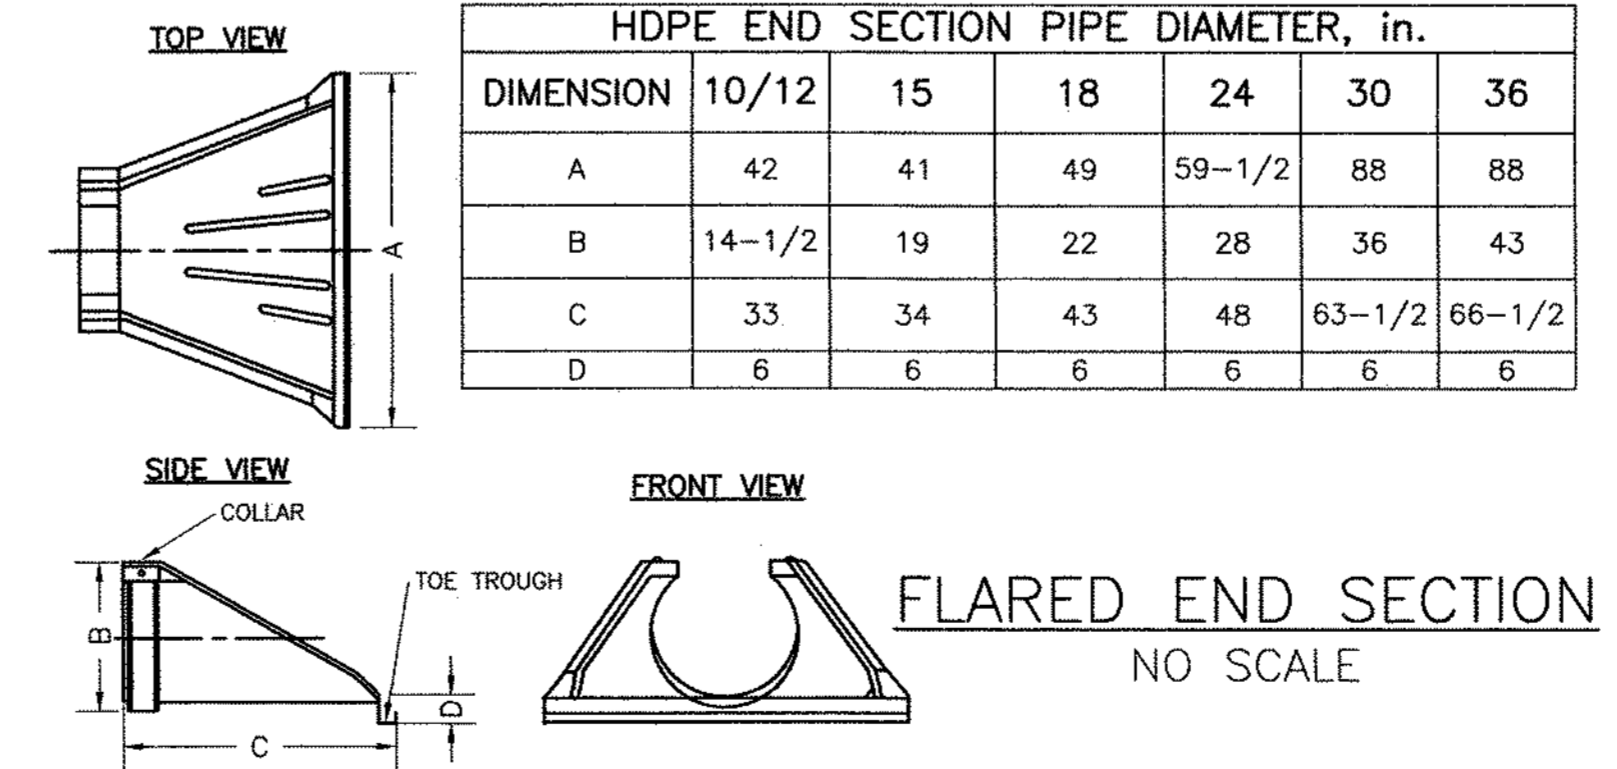

DIMENSION	HDPE END SECTION PIPE DIAMETER, in.					
	10/12	15	18	24	30	36
A	42	41	49	59-1/2	88	88
B	14-1/2	19	22	28	36	43
C	33	34	43	48	63-1/2	66-1/2
D	6	6	6	6	6	6

NO.	REVISION	DATE	BY	APP.
2.	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB
1.	REVISED PER PENNDOT REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCOO REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB

CLIENT: R.B. ASHLEY CUSTOMS, LLC
1011 RIDGE ROAD
POTTSTOWN, PA 19465

SUBJECT: POST CONSTRUCTION STORMWATER MANAGEMENT DETAILS

KELLY ACRES

DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA

1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518
PHONE: 610-689-8021
FAX: 610-689-4538

PROJECT NO.: 20-374A
DWG. NO.: PC220374A
SHEET NO.: 16 OF 17

DESIGN: BOB **CHKD. BY:** BOB
DRAWN BY: WJD **CHKD. BY:** BOB
DATE: 2020-09-04 **SCALE:** NOT TO SCALE

Boyer ENGINEERING LLC

P:\PROJECTS\20-374A_Robins - Kelly\LA\DWG\PI\20274A.dwg, 08-Feb-22, 12:03:33

NPDES PERMIT NOTES

- UPON REDUCTION, LOSS OR FAILURE OF THE BMP, THE PERMITTEE AND CO-PERMITTEE SHALL TAKE IMMEDIATE ACTION TO RESTORE THE BMPS OR PROVIDE AN ALTERNATIVE METHOD OF TREATMENT.
- WHERE E&S BMPS ARE FOUND TO BE INOPERATIVE OR INEFFECTIVE DURING AN INSPECTION, OR ANY OTHER TIME, THE PERMITTEE AND CO-PERMITTEE SHALL IMMEDIATELY CONTACT THE MONTGOMERY COUNTY CONSERVATION DISTRICT, BY PHONE OR PERSONAL CONTACT, FOLLOWED BY THE SUBMISSION OF A WRITTEN REPORT WITHIN 5 DAYS OF THE INITIAL CONTACT.
- PERMITTEES REQUESTING A RENEWAL OF COVERAGE UNDER GENERAL PERMIT MUST SUBMIT TO THE MONTGOMERY COUNTY CONSERVATION DISTRICT AN ADMINISTRATIVELY COMPLETE AND ACCEPTABLE NOI, AT LEAST 90 DAYS PRIOR TO THE EXPIRATION DATE OF THE COVERAGE.
- NOTICE OF TERMINATION. WHERE ALL STORM WATER DISCHARGES ASSOCIATED WITH CONSTRUCTION ACTIVITY THAT ARE AUTHORIZED BY THIS PERMIT ARE ELIMINATED, AND BMPS IDENTIFIED IN THE POST CONSTRUCTION STORM WATER MANAGEMENT (PCSM) PLAN HAVE BEEN INSTALLED, THE PERMITTEE OR CO-PERMITTEE OF THE FACILITY MUST SUBMIT A NOTICE OF TERMINATION (NOT) FORM THAT IS SIGNED IN ACCORDANCE WITH PART B.1.C (SIGNATORY REQUIREMENTS) OF THIS PERMIT TO THE MONTGOMERY COUNTY CONSERVATION DISTRICT.

OPERATION AND MAINTENANCE NOTES:

- RAIN GARDEN**
 - WHILE VEGETATION IS BEING ESTABLISHED, PRUNING AND WEEDING MAY BE REQUIRED.
 - ONCE EVERY 2 TO 3 YEARS THE ENTIRE AREA SHALL BE MULCHED.
 - RETENTION AREAS SHALL BE INSPECTED TWICE A YEAR FOR EROSION, INVASIVE SPECIES, SEDIMENT BUILDUP, AND VEGETATIVE CONDITIONS. IF FOUND, THE PROBLEM SHALL BE CORRECTED IMMEDIATELY.
 - DURING PERIODS OF EXTENDED DROUGHT, THE RAIN GARDENS SHALL BE WATERED.
 - TREES AND SHRUBS SHALL BE INSPECTED TWICE PER YEAR BY A PROFESSIONAL FOR HEALTH AND REPLACED IF NECESSARY.
 - IF INSPECTIONS FIND STANDING WATER LONGER THAN 72 HOURS AFTER THE END OF THE RAINFALL EVENT, THE OWNER MAY FIND IT DESIRABLE TO CONTACT A PROFESSIONAL TO EVALUATE THE BMP AND DETERMINE A COURSE OF ACTION TO REMEDY STANDING WATER. THE WATER MAY BE PUMPED THROUGH A FILTER BAG OR SIMILAR DEVICE TO DEWATER THE RAIN GARDEN.
 - THE BASIN, BERM AND OUTLET STRUCTURE SHALL BE INSPECTED EVERY TWO YEARS BY AN APPROPRIATELY LICENSED PROFESSIONAL FOR PROPER OPERATION AND STRUCTURAL STABILITY.
 - BASIN REMEDIATION MAY INCLUDE SOIL REPLACEMENT, TREE AND SHRUB PLANTINGS, SLOW-RELEASE DEVICES OR ANY OTHER APPROVED TECHNIQUE.
 - INSPECTIONS SHALL OCCUR 72 HOURS AFTER THE RAINFALL EVEN AND INCLUDE A LOG OF DAILY DEWATERING MEASUREMENTS.
- VEGETATED SWALE**
 - INSPECT AND CORRECT EROSION PROBLEMS, DAMAGE TO VEGETATION AND SEDIMENT AND DEBRIS ACCUMULATION.
 - MOW AND TRIM VEGETATION TO ENSURE SAFETY, AESTHETICS, PROPER SWALE OPERATION OR TO SUPPRESS WEEDS. MOW ONLY WHEN SWALE IS DRY TO AVOID RUTS AND REMOVE LITTER AND DEBRIS PRIOR TO MOWING.
 - WATER DURING DROUGHT CONDITIONS, RESEED BARE AREAS AND CLEAR DEBRIS AND BLOCKAGES.
 - REMEDIAION MAY INCLUDE SOIL REPLACEMENT, TREE AND SHRUB PLANTINGS, SLOW RELEASE DEVICES OR ANY OTHER APPROVED TECHNIQUE.
 - INSPECTIONS SHALL OCCUR 72 HOURS AFTER THE RAINFALL EVENT AND INCLUDE A LOG OF DAILY DEWATERING MEASUREMENTS.
- SOIL AMENDMENT AREAS**
 - THE OVERLYING VEGETATION OF THE AMENDED FEATURES SHOULD BE MAINTAINED IN GOOD CONDITION, BARE SPOTS SHALL BE RESEED IMMEDIATELY.
 - VEHICULAR ACCESS ON AMENDED AREAS SHOULD BE PROHIBITED, AND CARE SHOULD BE TAKEN TO AVOID EXCESSIVE COMPACTION BY MOWERS. IF ACCESS IS NEEDED, USE OF PERMEABLE, TURF REINFORCEMENT SHOULD BE CONSIDERED.
 - THE AMENDED AREAS SHALL BE INSPECTED EVERY TWO YEARS BY AN APPROPRIATELY LICENSED PROFESSIONAL FOR COMPACTION.
 - ADDITIONAL AMENDMENT MAY BE NECESSARY TO MITIGATE COMPACTION.

STREAM INTEGRITY PRESERVATION SECTION 102.8(B)(1)

THE PROPOSED BMPS AS PART OF THE POST CONSTRUCTION STORMWATER MANAGEMENT PLAN HAVE BEEN PLANNED AND PROVIDED IN ORDER TO PRESERVE THE INTEGRITY OF STREAM CHANNELS, AND TO MAINTAIN AND PROTECT THE PHYSICAL, BIOLOGICAL AND CHEMICAL QUALITIES OF THE RECEIVING STREAM.

PREVENT STORMWATER RUNOFF RATE INCREASE SECTION 102.8(B)(2)

THE PROPOSED POST CONSTRUCTION STORMWATER MANAGEMENT PLAN WILL PREVENT AN INCREASE IN STORMWATER RUNOFF THROUGH THE USE OF BMPS AND BY MAINTAINING EXISTING VEGETATION.

MINIMIZE STORMWATER RUNOFF VOLUME INCREASE SECTION 102.8(B)(3)

THE PROPOSED POST CONSTRUCTION STORMWATER MANAGEMENT PLAN WILL MINIMIZE AN INCREASE IN STORMWATER RUNOFF VOLUME THROUGH THE USE OF BMPS AND BY MAINTAINING EXISTING VEGETATION FOR THE 2-YEAR 24-HOUR STORM EVENT.

MINIMIZE IMPERVIOUS AREAS SECTION 102.8(B)(4)

THE EXISTING DRAINAGE FEATURES AND VEGETATION SHALL BE PROTECTED TO THE MAXIMUM EXTENT PRACTICAL. TO ACHIEVE THIS GOAL, THE AREAS ON SITE OUTSIDE OF THE LIMITS OF DISTURBANCE ARE SUBJECT TO THE FOLLOWING CRITERIA:

- AREAS SHALL NOT BE SUBJECT TO GRADING OR MOVEMENT OF EXISTING SOIL.
- EXISTING VEGETATION IN A HEALTHY CONDITION MAY NOT BE REMOVED.
- INVASIVE NON-NATIVE VEGETATION MAY BE REMOVED.
- PRUNING OR OTHER REQUIRED MAINTENANCE OF VEGETATION IS PERMITTED. ADDITIONAL PLANTING IS PERMITTED.
- AREAS SHALL BE PROTECTED AND DELINEATED IN THE FIELD.
- THE AREAS NOT SUBJECT TO GRADING ARE ALSO DELINEATED ON THE POST CONSTRUCTION STORMWATER MANAGEMENT PLAN. IF ANY FUTURE GRADING OR DISTURBANCE OF THESE AREAS OCCURS, SUBSEQUENT STORMWATER MANAGEMENT MUST BE PROVIDED TO ADDRESS DISTURBANCE.

MINIMIZE LAND CLEARING AND GRADING SECTION 102.8(B)(6)

IN ORDER TO MINIMIZE LAND CLEARING AND GRADING, THE AREAS BETWEEN TREE PROTECTION FENCING AND PROPERTY BOUNDARIES ARE SUBJECT TO THE FOLLOWING CRITERIA:

- AREAS SHALL NOT BE SUBJECT TO GRADING OR MOVEMENT OF EXISTING SOIL.
- EXISTING VEGETATION IN A HEALTHY CONDITION MAY NOT BE REMOVED.
- INVASIVE NON-NATIVE VEGETATION MAY BE REMOVED.
- PRUNING OR OTHER REQUIRED MAINTENANCE OF VEGETATION IS PERMITTED. ADDITIONAL PLANTING IS PERMITTED.
- AREAS SHALL BE PROTECTED AND DELINEATED IN THE FIELD.
- THE AREAS NOT SUBJECT TO GRADING ARE ALSO DELINEATED ON THE POST CONSTRUCTION STORMWATER MANAGEMENT PLAN. IF ANY FUTURE GRADING OR DISTURBANCE OF THESE AREAS OCCURS, SUBSEQUENT STORMWATER MANAGEMENT MUST BE PROVIDED TO ADDRESS DISTURBANCE.

MINIMIZE SOIL COMPACTION SECTION 102.8(B)(7)

THE LIMITS OF DISTURBANCE HAVE BEEN DELINEATED AS THE MINIMUM PRACTICAL AREA AND ALL OTHER AREAS SHALL NOT BE DISTURBED AND ARE SUBJECT TO THE FOLLOWING CRITERIA:

- AREAS SHALL NOT BE SUBJECT TO GRADING OR MOVEMENT OF EXISTING SOIL.
- EXISTING VEGETATION IN A HEALTHY CONDITION MAY NOT BE REMOVED.
- INVASIVE NON-NATIVE VEGETATION MAY BE REMOVED.
- PRUNING OR OTHER REQUIRED MAINTENANCE OF VEGETATION IS PERMITTED. ADDITIONAL PLANTING IS PERMITTED.
- AREAS SHALL BE PROTECTED AND DELINEATED IN THE FIELD.
- THE AREAS NOT SUBJECT TO GRADING ARE ALSO DELINEATED ON THE POST CONSTRUCTION STORMWATER MANAGEMENT PLAN. IF ANY FUTURE GRADING OR DISTURBANCE OF THESE AREAS OCCURS, SUBSEQUENT STORMWATER MANAGEMENT MUST BE PROVIDED TO ADDRESS DISTURBANCE.

MAINTENANCE PROGRAM SECTION 102.8(F)(10)

- THE PERMITTEE IS TO PROVIDE PROOF BY THE DESIGN ENGINEER OR ON-SITE INSPECTOR THAT MAJOR DRAINAGE STRUCTURES AND CONTROLS HAVE BEEN CONSTRUCTED AS DESIGNED.
- THE PERMITTEE IS ULTIMATELY RESPONSIBLE FOR ALL EROSION AND SEDIMENTATION POLLUTION CONTROL AND SITE STABILIZATION. THE PERMITTEE MAY DELEGATE AUTHORITY FOR IMPLEMENTING AND MAINTAINING THE CONTROLS TO INDIVIDUAL LANDOWNERS OR CONTRACTORS. THE ULTIMATE RESPONSIBILITY FOR PROPER INSTALLATION AND MAINTENANCE IS THE PERMITTEE'S.
- UNTIL THE SITE IS STABILIZED, ALL EROSION AND SEDIMENT BMP'S MUST BE MAINTAINED PROPERLY. MAINTENANCE MUST INCLUDE INSPECTIONS OF ALL EROSION AND SEDIMENT CONTROL BMP'S AFTER EACH RUNOFF EVENT AND ON A WEEKLY BASIS. ALL PREVENTATIVE AND REMEDIAL MAINTENANCE WORK, INCLUDING CLEAN OUT, REPAIR, REPLACEMENT, REGARDING, RESEEDING, REMULCHING, AND RETENITING, MUST BE DONE IMMEDIATELY. IF EROSION AND SEDIMENT CONTROL BMP'S FAIL TO PERFORM AS EXPECTED, REPLACEMENT BMP'S, OR MODIFICATIONS TO THOSE INSTALLED WILL BE REQUIRED.
- SEDIMENT SHALL BE REMOVED FROM STORMWATER BMP'S WHEN IT HAS ACCUMULATED TO A DEPTH OF 6 INCHES. COLLECTED SEDIMENT SHALL BE SPREAD ELSEWHERE (IN AREAS UNDER CONSTRUCTION) DURING CONSTRUCTION AND STABILIZATION. SEEDING AND MULCHING OF SLOPES SHALL CONFORM TO THE RECOMMENDATIONS WITHIN OR APPROVED EQUAL. TOPSOIL (MINIMUM 6 INCHES) SHALL BE PLACED PRIOR TO SEEDING.
- THE STORMWATER BMP'S AND WATER QUALITY FEATURES ARE TO BE MAINTAINED AND THE OUTLET STRUCTURES CHECKED AND REPAIRED IF NECESSARY.
- MAINTENANCE OF THE STORMWATER BMP'S AND OTHER FACILITIES SHALL BE THE RESPONSIBILITY OF THE OWNER OF RECORD. THE OWNER OF RECORD MAY DELEGATE AUTHORITY FOR MAINTAINING THE MAINTENANCE TO OTHER INDIVIDUALS OR CONTRACTORS BUT THE ULTIMATE RESPONSIBILITY FOR PROPER MAINTENANCE IS THE OWNER OF RECORD.
- VEGETATION SHALL BE MOWED WHENEVER NECESSARY TO MAINTAIN A PLEASING APPEARANCE AND DISCOURAGE WEED GROWTH. ALL LOCAL REGULATIONS WILL BE COMPLIED WITH.
- AREAS THAT CONTAIN SOD SHALL BE CHECKED VERY CAREFULLY TO ENSURE THAT JOINTS BETWEEN THE SOD STRIPS ARE TIGHT AND SECURE. WHERE JOINT SEPARATION IS IN EVIDENCE, A CAREFUL INSPECTION OF EACH STRIP SHALL BE MADE TO DETERMINE WHETHER UNDERMINING OF THE STRIPS IS OCCURRING. IF IT IS, THE STRIPS SHALL BE ROLLED UP, THE SUBSURFACE SHALL BE FILLED AND GRADED AS REQUIRED AND THE SOD STRIPS SHALL BE RE-LAID WITH TIGHT JOINTS AND PEGGING.
- SEEDED AREAS THAT HAVE WASHED AWAY SHALL BE FILLED AND GRADED AS NECESSARY AND THEN RESEDED. A BURLAP OR STRAW COVER WILL BE APPLIED AT A RATE OF 3 TONS/ACRE TO RETAIN THE SEED UNTIL IT HAS A CHANCE TO ROOT PROPERLY.
- THE ABOVE PROCEDURE SHALL BE REPEATED AFTER EACH SIZEABLE STORM UNTIL NO MORE SIGNS OF EROSION ARE EVIDENT. AT WEEKLY INTERVALS THEREAFTER, INSPECTION AND NECESSARY CLEANING WILL BE DONE. PREVENTATIVE AND REMEDIAL MAINTENANCE WORK, INCLUDING CLEAN OUT, REPAIR, REPLACEMENT, REGRADING, AND RESEEDING AFTER EVERY MAJOR RAINFALL EVENT.
- INSPECTIONS SHALL BE LOGGED ONTO DEP FORM 3800-FM-BCW027D REV. 12/2019 AND KEPT ONSITE AT ALL TIMES.

EXISTING/ PROPOSED RIPARIAN BUFFER

*THERE ARE NO RIPARIAN BUFFERS REGULATED BY CHAPTER 102 PRESENT OR PROPOSED AT THIS SITE BY THIS PROJECT.

EXISTING/ PROPOSED RIPARIAN FOREST BUFFERS SECTION 102.8 (F)(14)

*THERE ARE NO RIPARIAN FOREST BUFFERS REGULATED BY CHAPTER 102 PRESENT OR PROPOSED AT THIS SITE BY THIS PROJECT.

RAIN GARDEN CONSTRUCTION SEQUENCE:

- ANY SEDIMENT ENTERING THE BMP SHALL BE REMOVED WITH LIGHT EQUIPMENT. THE UNDERLYING SOIL SHALL BE SCARIFIED A MINIMUM OF TWELVE INCHES WITH A YORK RAKE, ROTOTILLER OR OTHER SUITABLE EQUIPMENT. A LICENSED PROFESSIONAL SHALL PROVIDE OVERSIGHT DURING THE SCARIFYING OF THE SUBGRADE.
- THE TOPSOIL AND SUBSURFACE SOIL SHALL BE STRIPPED AND BE PLACED WHERE SHOWN ON THE PLAN.
- EXCAVATE THE BERM, REMOVE THE TEMPORARY OUTLET STRUCTURE AND PIPE, AND PLACE AND COMPACT THE FILL FOR THE BERM. THE STRUCTURAL SOIL SHALL BE PLACED WHERE SHOWN ON THE PLAN.
- INSTALL THE PERMANENT OUTLET STRUCTURE AND OUTLET PIPE. A LICENSED PROFESSIONAL SHALL PROVIDE OVERSIGHT DURING THE BACKFILLING OF THE OUTLET PIPE.
- STABILIZE THE ENTIRE OUTSIDE OF THE BERM AND ON THE INSIDE OF THE BERM WITH TOPSOIL.
- IMMEDIATELY APPLY THE PERMANENT SEEDING AND MULCH FOR THE ENTIRE AREA. A SLOPE PROTECTION BLANKET SHALL BE INSTALLED WHERE SHOWN ON THE PLAN AND ALL SLOPES GREATER THAN 3:1.
- AMENDED TOPSOIL PER THE PROCEDURE OUTLINED ON THE PLANS SHALL BE INSTALLED ON THE INSIDE OF THE RAIN GARDEN, PERMANENTLY SEEDED AND MULCHED. A SLOPE PROTECTION BLANKET SHALL BE INSTALLED WHERE SHOWN ON THE PLAN AND ALL SLOPES GREATER THAN 3:1

RAIN GARDEN/MRC CONSTRUCTION SEQUENCE:

- ANY SEDIMENT ENTERING THE BMP SHALL BE REMOVED WITH LIGHT EQUIPMENT. THE UNDERLYING SOIL SHALL BE SCARIFIED A MINIMUM OF TWELVE INCHES WITH A YORK RAKE, ROTOTILLER OR OTHER SUITABLE EQUIPMENT. A LICENSED PROFESSIONAL SHALL PROVIDE OVERSIGHT DURING THE SCARIFYING OF THE SUBGRADE.
- THE TOPSOIL AND SUBSURFACE SOIL SHALL BE STRIPPED AND BE PLACED WHERE SHOWN ON THE PLAN.
- EXCAVATE THE BERM, REMOVE THE TEMPORARY OUTLET STRUCTURE AND PIPE, AND PLACE AND COMPACT THE FILL FOR THE BERM. THE STRUCTURAL SOIL SHALL BE PLACED WHERE SHOWN ON THE PLAN.
- INSTALL THE PERFORATED UNDERDRAIN PIPE.
- INSTALL THE PERMANENT OUTLET STRUCTURE AND OUTLET PIPE. A LICENSED PROFESSIONAL SHALL PROVIDE OVERSIGHT DURING THE BACKFILLING OF THE OUTLET PIPE.
- STABILIZE THE ENTIRE OUTSIDE OF THE BERM AND ON THE INSIDE OF THE BERM WITH TOPSOIL.
- IMMEDIATELY APPLY THE PERMANENT SEEDING AND MULCH FOR THE ENTIRE AREA. A SLOPE PROTECTION BLANKET SHALL BE INSTALLED WHERE SHOWN ON THE PLAN AND ALL SLOPES GREATER THAN 3:1.
- AMENDED TOPSOIL PER THE PROCEDURE OUTLINED ON THE PLANS SHALL BE INSTALLED ON THE INSIDE OF THE RAIN GARDEN, PERMANENTLY SEEDED AND MULCHED. A SLOPE PROTECTION BLANKET SHALL BE INSTALLED WHERE SHOWN ON THE PLAN AND ALL SLOPES GREATER THAN 3:1

RECYCLING PROCEDURES SECTION 102.8(F)(11)

THE POTENTIAL OR ANTICIPATED CONSTRUCTION WASTES FOR THIS PROJECT INCLUDE THOSE THAT ARE INCIDENTAL TO RESIDENTIAL CONSTRUCTION, AS WELL AS THOSE ASSOCIATED WITH THE CONSTRUCTION OF NEW RESIDENTIAL CONSTRUCTION WITH THE TYPICAL UTILITIES.

DURING CONSTRUCTION, ALL CONSTRUCTION WASTES, BRICKS, BLOCK, CONCRETE, SCRAP LUMBER, TRASH, GARBAGE, PAPER, BOTTLES, CANS, AND ANY MATERIALS OR PRODUCTS DEEMED UNUSABLE SHALL BE PLACED IN AN ON-SITE DUMPSTER PROVIDED BY SITE CONTRACTOR. DUMPSTER SHALL BE REMOVED FROM SITE WEEKLY OR AS NEEDED. HAULER REMOVING DUMPSTER SHALL EMPTY AT AN APPROVED LANDFILL OR RECYCLING FACILITY. HAULING DUMP TICKETS SHALL BE PROVIDED TO SITE CONTRACTOR AS OF PROOF THAT WASTE MATERIALS HAVE BEEN DISPOSED OF PROPERLY.

THE OPERATOR/RESPONSIBLE PERSON SHALL REMOVE FROM THE SITE, RECYCLE, OR DISPOSE OF ALL BUILDING MATERIALS AND WASTES IN ACCORDANCE WITH THE PA DEP'S SOLID THE OPERATOR/RESPONSIBLE PERSON SHALL REMOVE FROM THE SITE, RECYCLE, OR DISPOSE OF ALL BUILDING MATERIALS AND WASTES IN ACCORDANCE WITH THE PA DEP'S SOLID WASTE REGULATIONS (25 PA CODE 260.1 ET SEQ., 271.1 ET SEQ., AND 287.1 ET SEQ.) AND/OR ANY ADDITIONAL LOCAL STATE OR FEDERAL REGULATIONS. BUILDING MATERIALS (USED OR UNUSED) OR WASTE MATERIALS SHALL NOT ILLEGALLY BE BURNED, BURIED, DUMPED OR DISCHARGED AT THE SITE.

POTENTIAL POLLUTION IDENTIFICATION SECTION 102.8(F)(12)

THE GEOLOGICAL FORMATIONS ON-SITE ARE SUCH THAT THE POLLUTION POTENTIAL IS POSSIBLE AND APPROPRIATE ACTIONS ARE REQUIRED. THE SOILS HAVE A POTENTIAL FOR EROSION. THE EROSION FROM THE SOILS COULD POTENTIALLY CAUSE WATER POLLUTION AND TO MINIMIZE THIS POTENTIAL THE EROSION AND SEDIMENT CONTROL BMPS MENTIONED ABOVE ARE TO BE PROVIDED.

OTHER CONTROLS TO MINIMIZE RUNOFF SECTION 102.8(B)(8)

NO OTHER MEASURES AND CONTROLS SHALL BE UTILIZED TO PREVENT OR MINIMIZE THE GENERATION OF ADDITIONAL STORMWATER.

BMP CRITICAL STAGES:

- PRECONSTRUCTION MEETING
- DURING THE SCARIFICATION OF THE UNDERLYING SOIL
- DURING OUTLET STRUCTURE AND PIPE INSTALLATION
- DURING SOIL AMENDMENT INSTALLATION.

ANTICIPATED BMP INSTALLATION SEQUENCE

- RAIN GARDEN 2
- RAIN GARDEN 3
- RAIN GARDEN/MRC 5
- RAIN GARDEN/MRC 4
- RAIN GARDEN 1

BMP 6.7.3 SOIL AMENDMENT & RESTORATION

- SUB-SOILING TO RELIEVE COMPACTION BEFORE THE TIME THE COMPOST IS PLACED AND PREFERABLY WHEN EXCAVATION IS COMPLETED, THE SUBSOIL SHALL BE IN A LOOSE, FRABLE CONDITION TO A DEPTH OF 20 INCHES BELOW FINAL TOPSOIL GRADE AND THERE SHALL BE NO EROSION RILLS OR WASHOUTS IN THE SUBSOIL SURFACE EXCEEDING SINCHES IN DEPTH. TO ACHIEVE THIS CONDITION, SUBSOILING, RIPPING, OR SCARIFICATION OF THE SUBSOIL WILL BE REQUIRED AS DIRECTED BY THE OWNER'S REPRESENTATIVE. WHEREVER THE SUBSOIL HAS BEEN COMPACTED BY EQUIPMENT OPERATION OR HAS BECOME DRIED OUT AND CRUSTED, AND WHERE NECESSARY TO OBLITERATE EROSION RILLS. SUB-SOILING SHALL BE REQUIRED TO REDUCE SOIL COMPACTION IN ALL AREAS WHERE PLANT ESTABLISHMENT IS PLANNED. SUB-SOILING SHALL BE PERFORMED BY THE PRIME OR EXCAVATING CONTRACTOR AND SHALL OCCUR BEFORE COMPOST PLACEMENT.
 - SUBSOILED AREAS SHALL BE LOOSENEED TO LESS THAN 1400 KPA (200 PSI) TO A DEPTH OF 20 INCHES BELOW FINAL TOPSOIL GRADE. WHEN DIRECTED BY THE OWNER'S REPRESENTATIVE, THE CONTRACTOR SHALL VERIFY THAT THE SUB-SOILING WORK CONFORMS TO THE SPECIFIED DEPTH. SUB-SOILING SHALL FORM A TWO-DIRECTIONAL GRID. CHANNELS SHALL BE CREATED BY A COMMERCIALLY AVAILABLE, MULTI-SHANKED, PARALLELOGRAM IMPLEMENT (SOLID-SHANK RIPPER). THE EQUIPMENT SHALL BE CAPABLE OF EXERTING A PENETRATION FORCE NECESSARY FOR THE SITE. NO DISC CULTIVATORS CHISEL PLOWS, OR SPRING-LOADED EQUIPMENT WILL BE ALLOWED. THE GRID CHANNELS SHALL BE SPACED A MINIMUM OF 12 INCHES TO A MAXIMUM OF 36 INCHES APART, DEPENDING ON EQUIPMENT, SITE CONDITIONS, AND THE SOIL MANAGEMENT PLAN. THE CHANNEL DEPTH SHALL BE A MINIMUM OF 20 INCHES OR AS SPECIFIED IN THE SOIL MANAGEMENT PLAN. IF SOILS ARE SATURATED, THE CONTRACTOR SHALL DELAY OPERATIONS UNTIL THE SOIL WILL NOT HOLD A BALL WHEN SQUEEZED. ONLY ONE PASS SHALL BE PERFORMED ON ERODIBLE SLOPES GREATER THAN 1 VERTICAL TO 3 HORIZONTAL. WHEN ONLY ONE PASS IS USED, WORK SHOULD BE AT RIGHT ANGLES TO THE DIRECTION OF SURFACE DRAINAGE, WHENEVER PRACTICAL.
 - EXCEPTIONS TO SUB-SOILING INCLUDE AREAS WITHIN THE DRIP LINE OF ANY EXISTING TREES, OVER UTILITY INSTALLATIONS WITHIN 30 INCHES OF THE SURFACE, WHERE TRENCHING/DRAINAGE LINES ARE INSTALLED, WHERE COMPACTION IS BY DESIGN (ABUTMENTS, FOOTINGS, OR IN SLOPES), AND ON INACCESSIBLE SLOPES, AS APPROVED BY THE OWNER'S REPRESENTATIVE. IN CASES WHERE EXCEPTIONS OCCUR, THE CONTRACTOR SHALL OBSERVE A MINIMUM SETBACK OF 20 FEET OR AS DIRECTED BY THE OWNER'S REPRESENTATIVE. ARCHEOLOGICAL CLEARANCES MAY BE REQUIRED IN SOME INSTANCES.
- COMPOST SOIL AMENDMENT INSTALLATION
 - SPREAD 2-3 INCHES OF APPROVED COMPOST ON EXISTING SOIL. TILL ADDED SOIL INTO EXISTING SOIL WITH A ROTARY TILLER THAT IS SET TO A DEPTH OF 6 INCHES. ADD AN ADDITIONAL 4 INCHES OF APPROVED COMPOST TO BRING THE AREA UP TO GRADE.
 - AFTER PERMANENT PLANTING/SEEDING, 2-3 INCHES OF COMPOST

SOIL AMENDMENT AND RESTORATION:

SOIL AMENDMENT AND RESTORATION SHALL BE DONE BY MIXING THE STOCKPILED EXISTING ON-SITE TOPSOIL WITH COMPOST BEFORE REDISTRIBUTING THE TOPSOIL. THE RATIO SHALL BE 2 PARTS TOPSOIL AND 1 PART COMPOST. THE COMPOST SHALL MEET THE STANDARDS IN TABLE 4.2:

TABLE 4.2 - COMPOST STANDARDS

ORGANIC MATTER CONTENT	25%-100% (DRY WEIGHT BASIS)
ORGANIC PORTION	FIBROUS AND ELONGATED
pH	5.5 - 8.5
MOISTURE CONTENT	30% - 60%
PARTICLE SIZE THROUGH 3/8" SIEVE	30% - 50% PASS
SOLUBLE SALT CONCENTRATION (mmhos/cm) MAXIMUM	5.0 dS/m

CLIENT R.B. ASHLEY CUSTOMS, LLC 1011 RIDGE ROAD POTTSTOWN, PA 19465	SUBJECT POST CONSTRUCTION STORMWATER MANAGEMENT NARRATIVE <h2 style="margin: 0;">KELLY ACRES</h2> DOUGLASS TOWNSHIP, MONTGOMERY COUNTY, PENNSYLVANIA
SEAL 	PROJECT NO. <h3 style="margin: 0;">20-374A</h3> DWG. NO. <h3 style="margin: 0;">PC220374A</h3> SHEET NO. <h3 style="margin: 0;">17 OF 17</h3>
1860 WEAVERTOWN ROAD, SUITE 100 DOUGLASSVILLE, PA 19518 PHONE: 610-689-8021 FAX: 610-689-4538	DESIGN: BOB CHKD. BY: BOB DRAWN BY: WJD CHKD. BY: DATE: 2020-09-04 SCALE: NOT TO SCALE

NO.	REVISION	DATE	BY	APP.
2.	REVISED PER SDE REVIEW LETTER DATED JANUARY 24, 2022	2022-02-01	SSR	BOB
1.	REVISED PER PENNON REVIEW LETTER DATED NOVEMBER 5, 2021 AND MCGD REVIEW LETTER DATED OCTOBER 19, 2021	2021-12-11	SSR	BOB